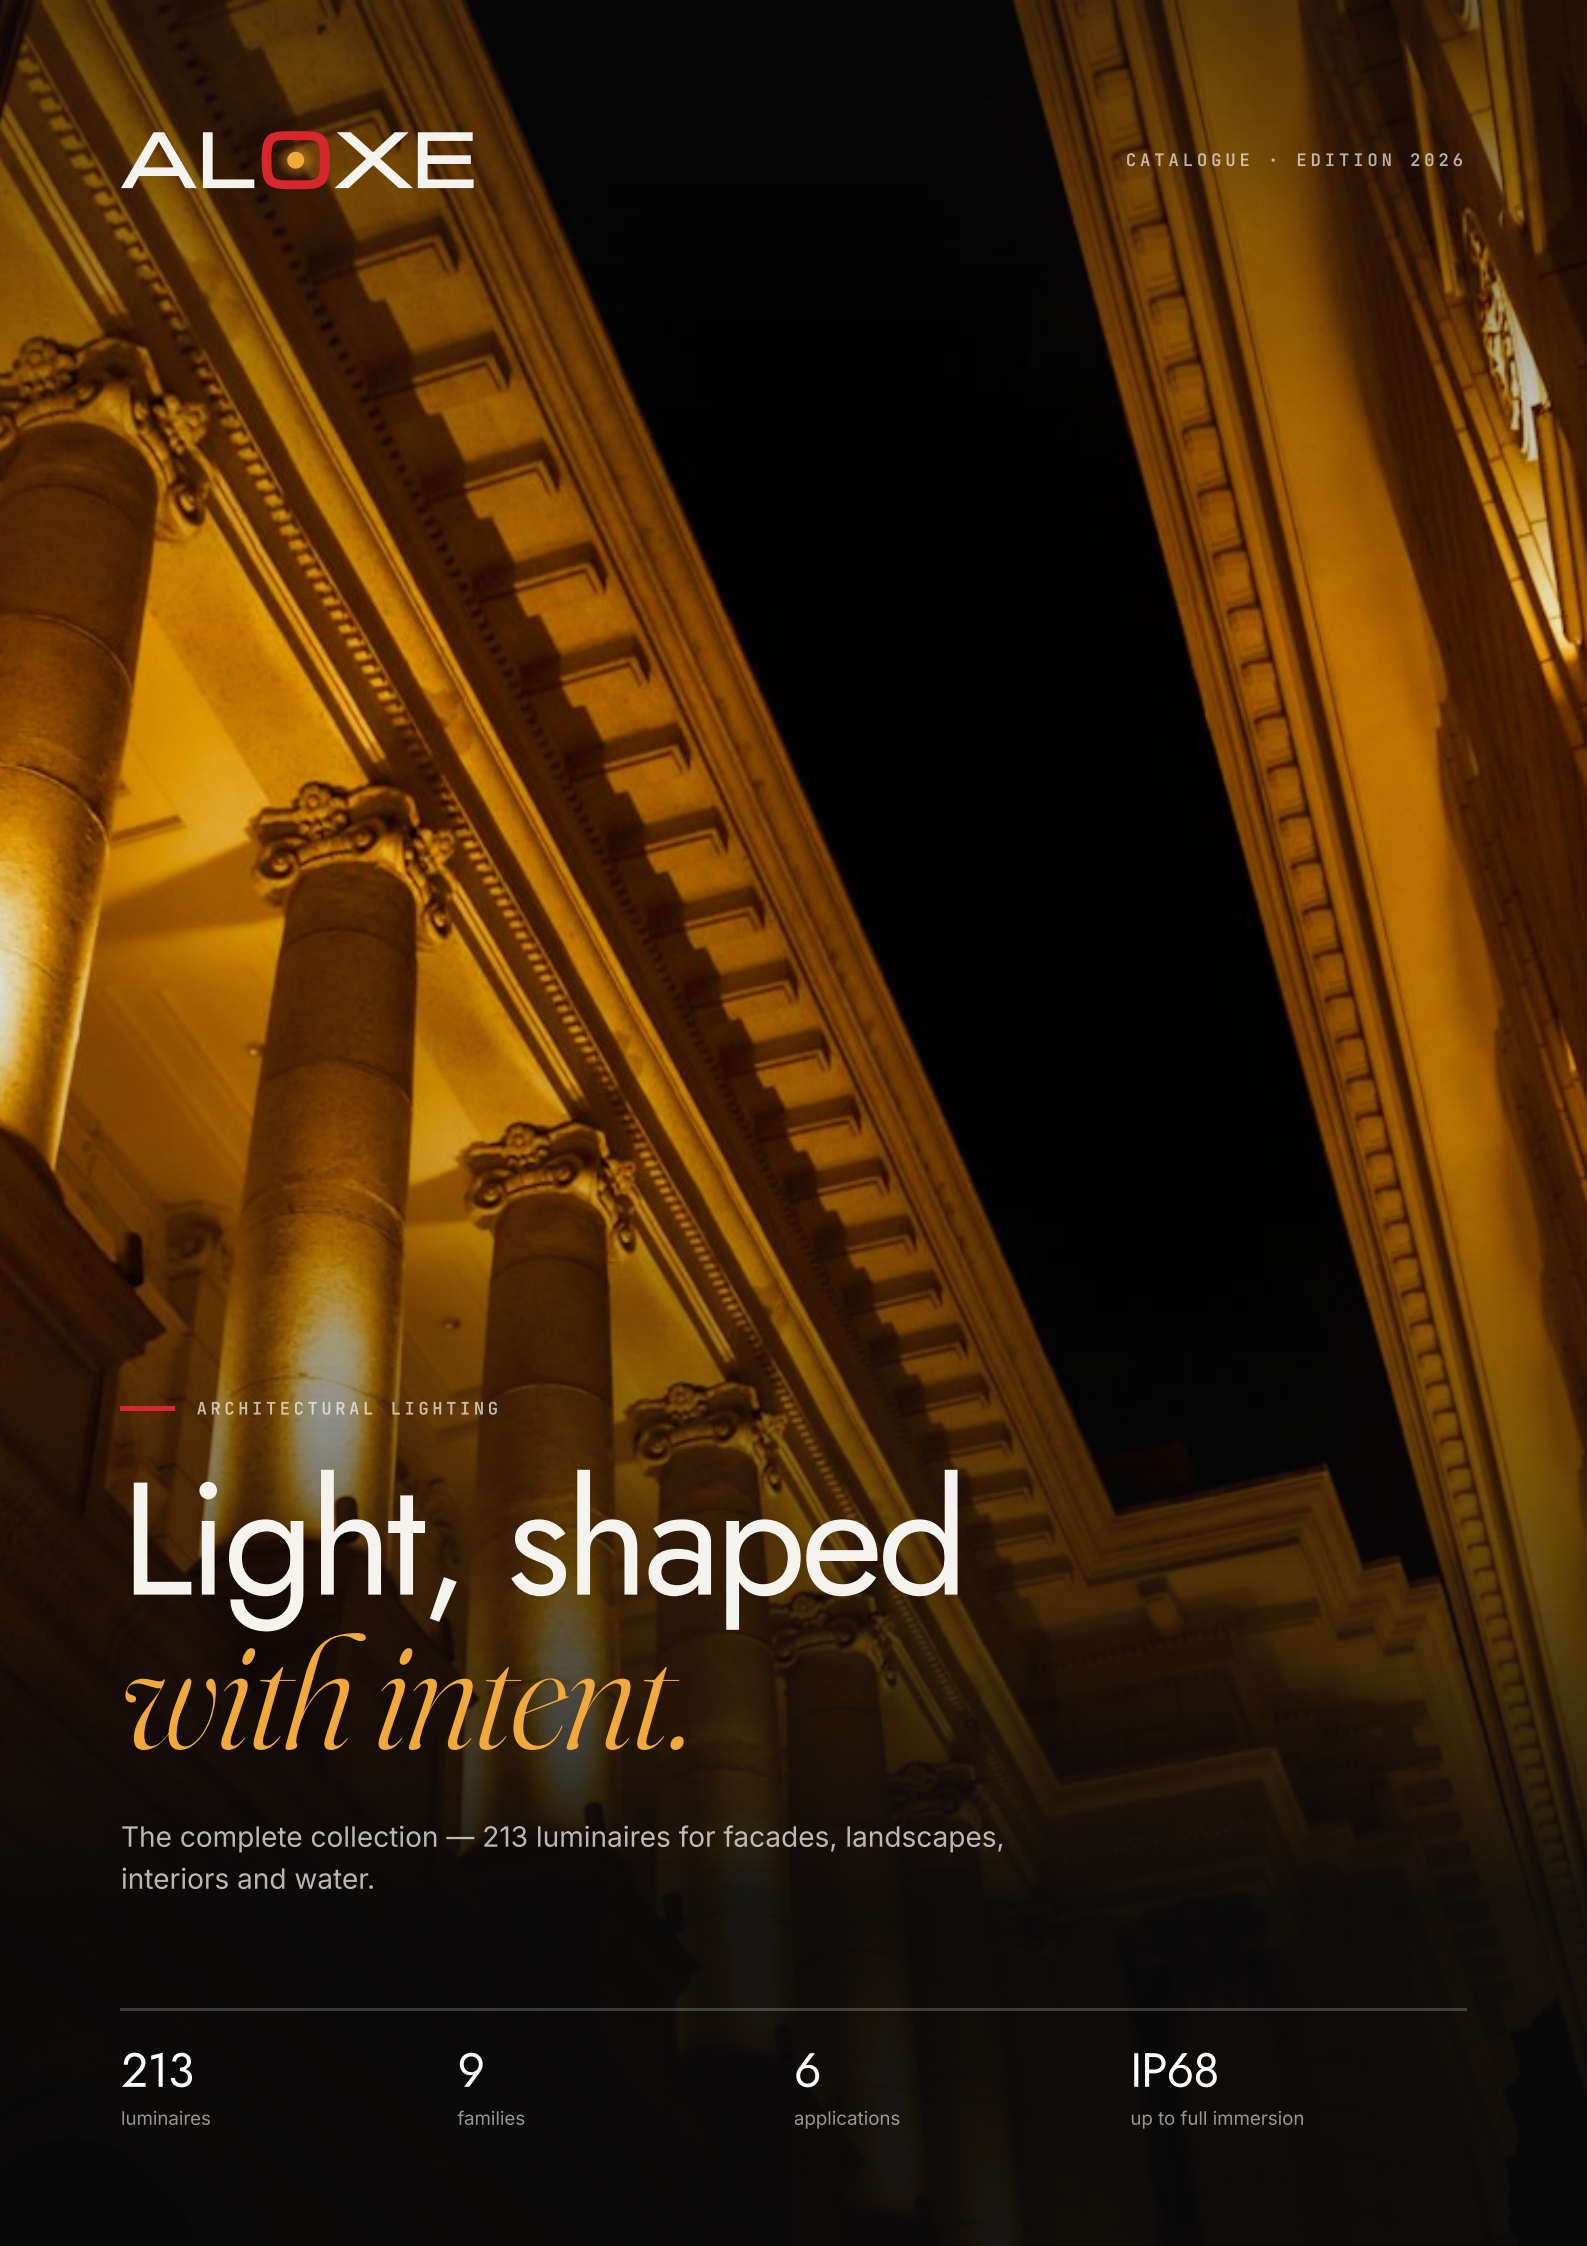


ALOXE

CATALOGUE · EDITION 2026

ARCHITECTURAL LIGHTING

Light, shaped *with intent.*

The complete collection — 213 luminaires for facades, landscapes, interiors and water.

213	9	6	IP68
luminaires	families	applications	up to full immersion

ABOUT ALOXE

Good lighting is invisible. *What it reveals* is everything.

ALOXE designs and supplies architectural LED lighting for the full journey of a project — from the jewellery cabinet and the gallery wall to the facade, the garden and the pool.

This catalogue gathers the complete range into one reference: application stories to start from the space, then every luminaire on its own page with photometry essentials, finishes and colour temperatures.

213	3°–120°	Ra 97	50k h
luminaires	beam options	colour rendering	rated LED life

01

Optics first

Every luminaire starts from the beam — 3° pin-spots to 120° floods, zoomable and framing optics, honest photometry.

02

Built to outlast

Die-cast aluminium and marine-grade stainless bodies, IP65–IP68 sealing and 50,000-hour CREE / OSRAM LED engines.

03

One family, every scale

From a 1W jewellery-cabinet spot to a 200W facade projector — one design language, one supplier, one point of contact.

CONTENTS

Start from the space, *or the family.*

APPLICATIONS

01 Facade & Architecture 04

02 Landscape & Gardens 05

03 Retail & Jewellery 06

04 Hospitality & Residential 07

05 Pools & Water Features 08

06 Galleries & Museums 09

REFERENCE

– Model index 232

PRODUCT FAMILIES

01 Magnetic & Cabinet 10
69 luminaires

02 Track & Framing Spots 80
6 luminaires

03 Outdoor Projectors 87
46 luminaires

04 Wall Washers 134
20 luminaires

05 Up & Down 155
12 luminaires

06 Underwater 168
15 luminaires

07 Inground & Foot 184
35 luminaires

08 Step, Wall & Surface 220
4 luminaires

09 Power & Control 225
6 luminaires



APPLICATION 01

Facade & Architecture

Graze, wash and outline buildings after dark.

Turn a building into a landmark. Narrow-beam projectors pick out columns and cornices, linear washers graze texture evenly up the wall, and up & down lights frame entrances and piers — all sealed for permanent outdoor duty.

RECOMMENDED FAMILIES

Outdoor Projectors	p. 87
Wall Washers	p. 134
Up & Down	p. 155

START WITH THESE



OD30CH
Outdoor Light
p. 119




WW001
Wall Washer
p. 140



UD51015
Up & Down Light
p. 159



AXOD27SQ
Outdoor Light
p. 91

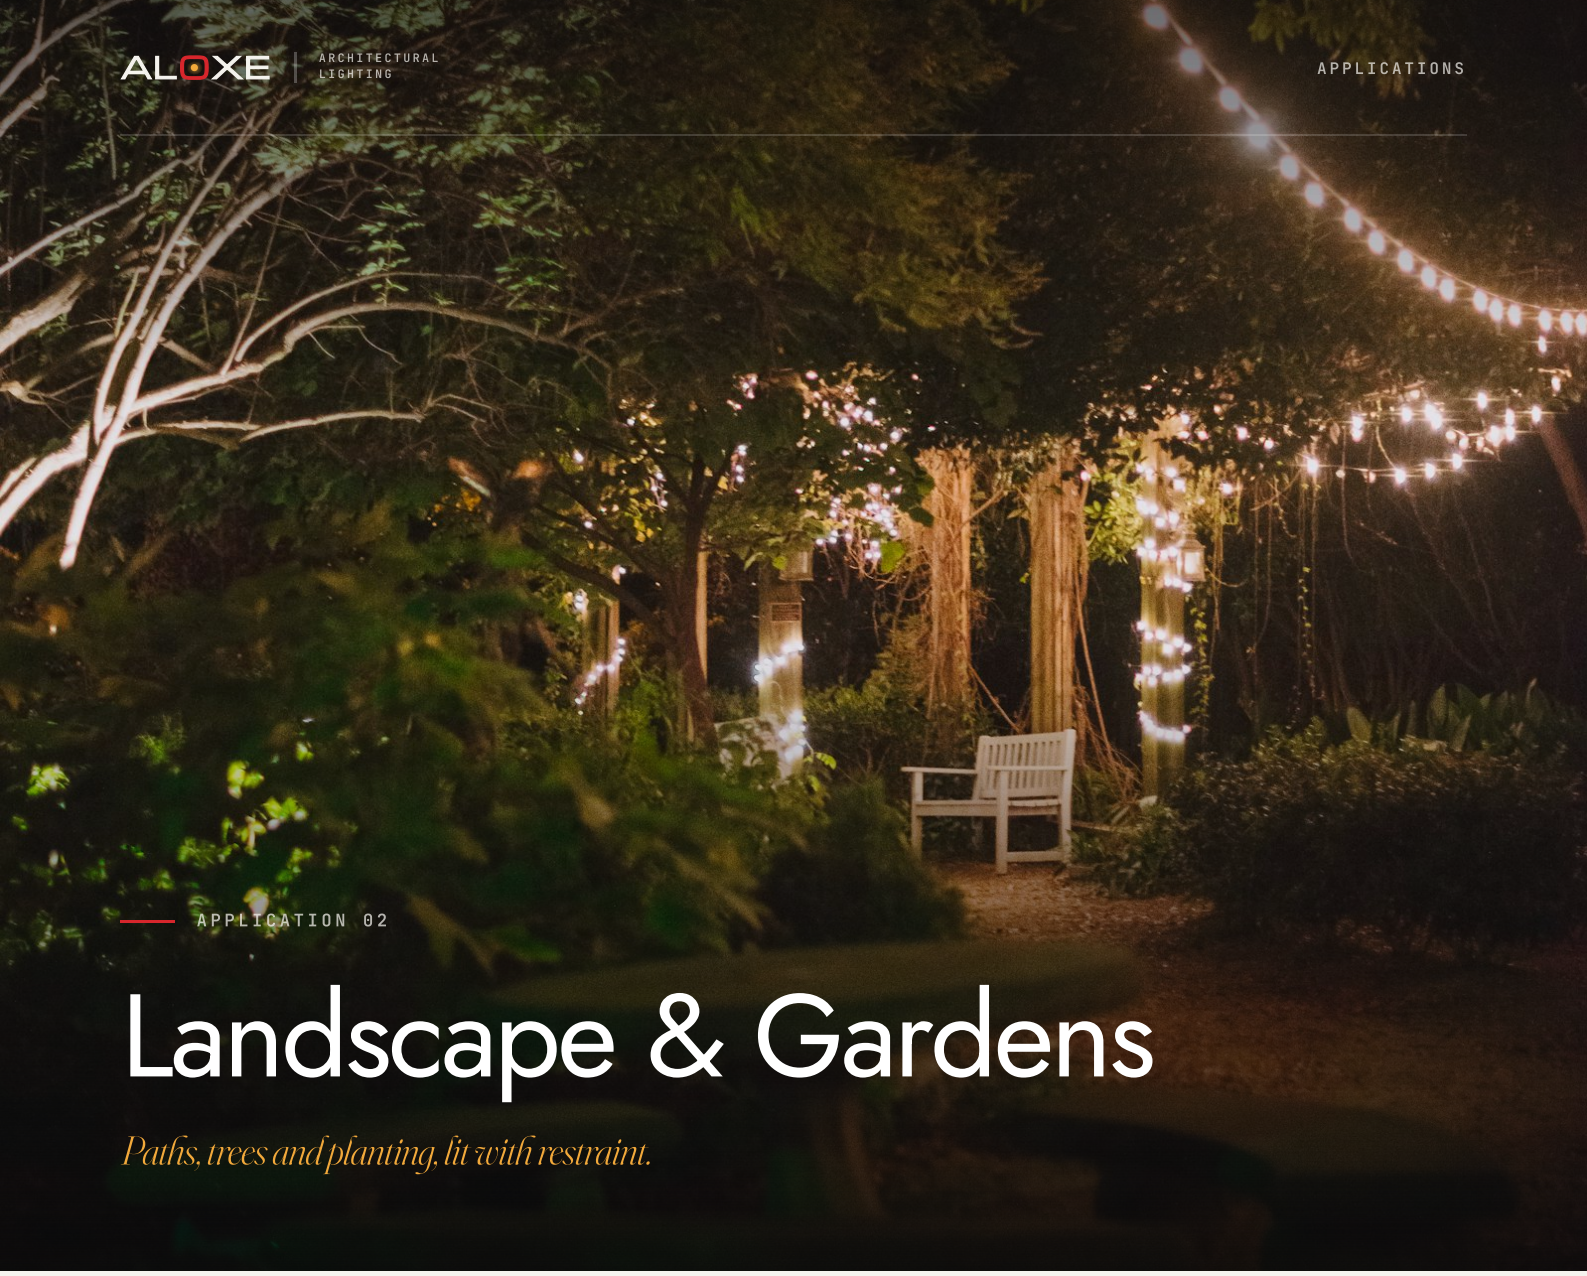

APPLICATION 02

Landscape & Gardens

Paths, trees and planting, lit with restraint.

Spike spots for trees and shrubs, drive-over inground uplights for paths and driveways, and low-level step and surface lights that guide without glare. Warm CCTs and shielded optics keep gardens calm after dark.

RECOMMENDED FAMILIES

Inground & Foot	p. 184
Outdoor Projectors	p. 87
Step, Wall & Surface	p. 220

START WITH THESE



ING1002
Elite Inground Light
p. 187




Outdoor Projectors
20W COB Spike Light
p. 110



OS1024
Surface Fitting IP65
p. 222



ING6M
Movable Inground
p. 188

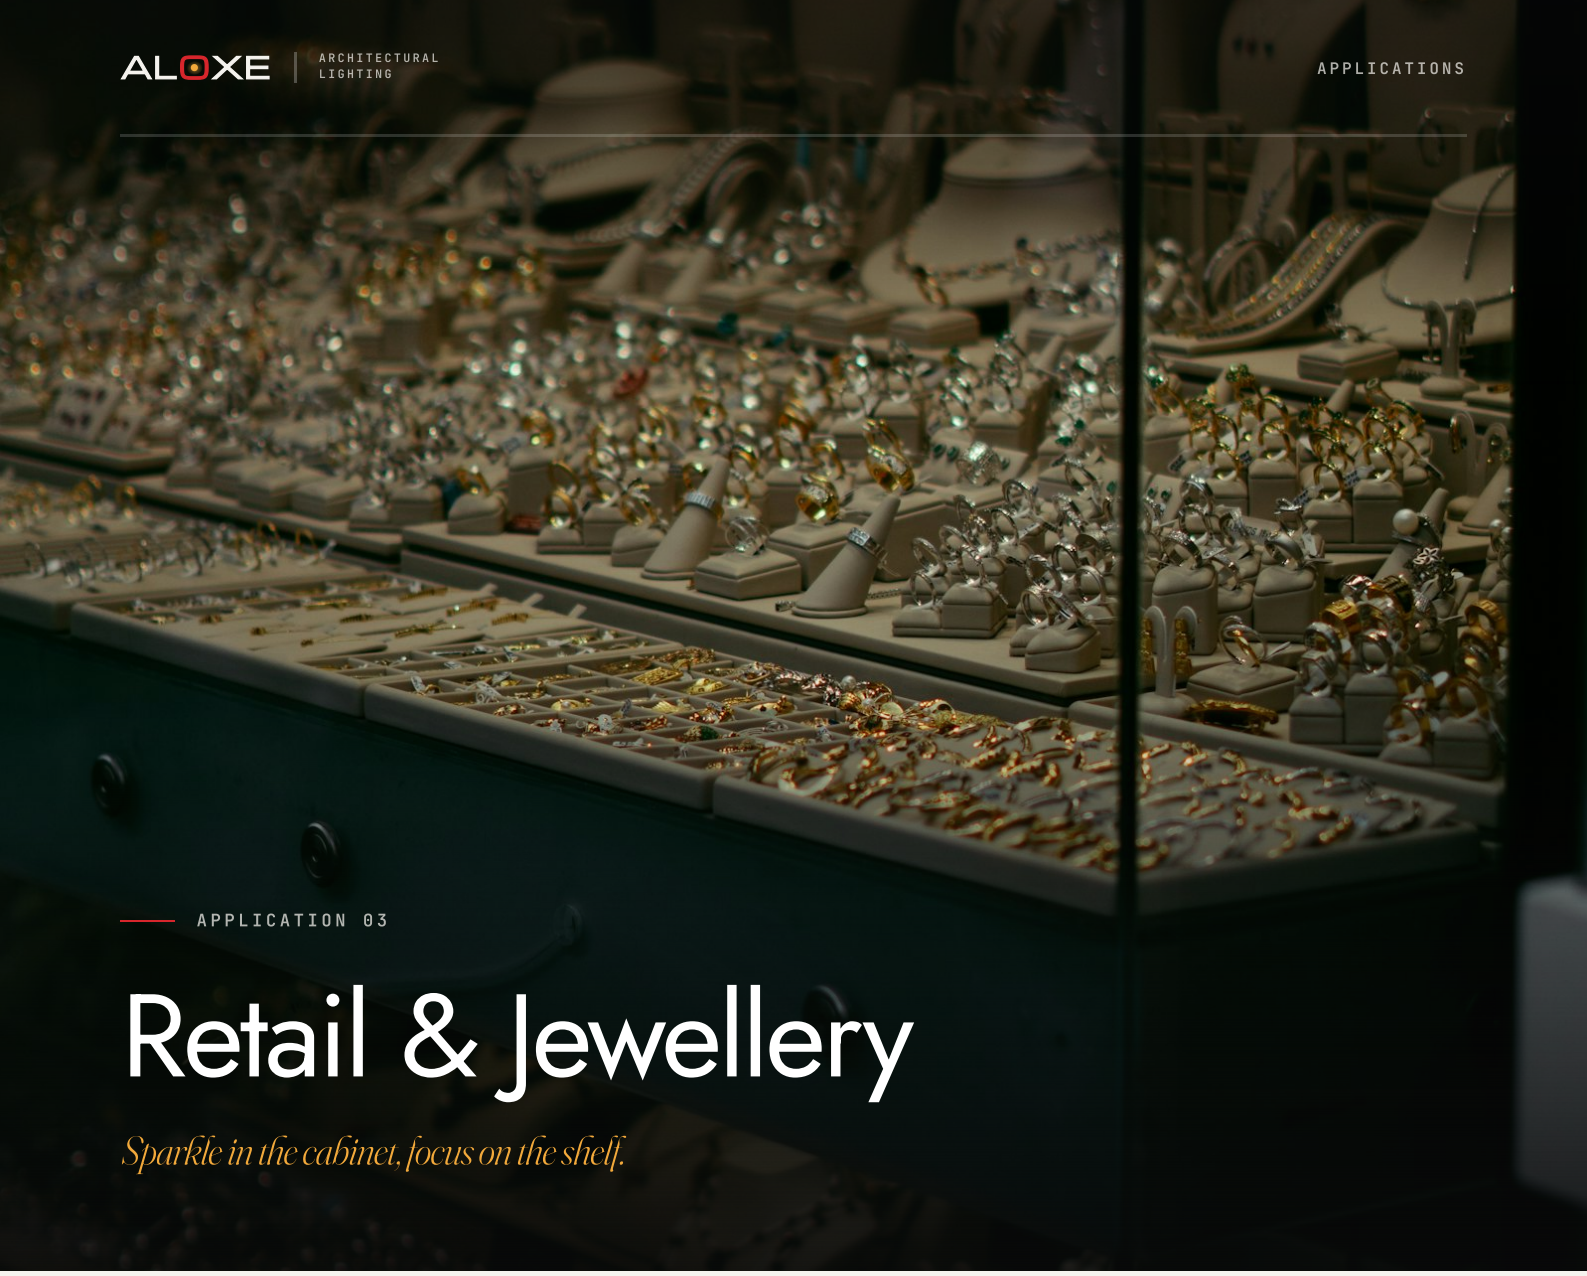

APPLICATION 03

Retail & Jewellery

Sparkle in the cabinet, focus on the shelf.

High-CRI magnetic spots and linear modules make metals, stones and fabrics read true. Cabinet poles and concealed micro-spots light jewellery from inside the display, while zoom track heads re-aim as merchandise changes.

RECOMMENDED FAMILIES

Magnetic & Cabinet p. 10

Track & Framing Spots p. 80

START WITH THESE



J036H
Magnetic Spot
p. 44



JX031P3
Cabinet Pole Light
p. 13



J062C
Conceal Spot
p. 66



TZ-2025L
Track Spot (Beam Adjustable)
p. 83



APPLICATION 04

Hospitality & Residential

Layered, warm light for lobbies, villas and homes.

Layer ambient, accent and architectural light: magnetic systems for clean ceilings, up & down lights for corridors and porches, and step lights for stairs. Dimmable drivers and controllers set the scene from day to night.

RECOMMENDED FAMILIES

Magnetic & Cabinet	p. 10
Up & Down	p. 155
Step, Wall & Surface	p. 220
Power & Control	p. 225

START WITH THESE



JX035HT
Magnetic Spot
p. 45




UPQ01
Square Up Lighter
p. 162



AL3ST
Step Light
p. 221



Power & Control
Knob Dimmer
p. 228

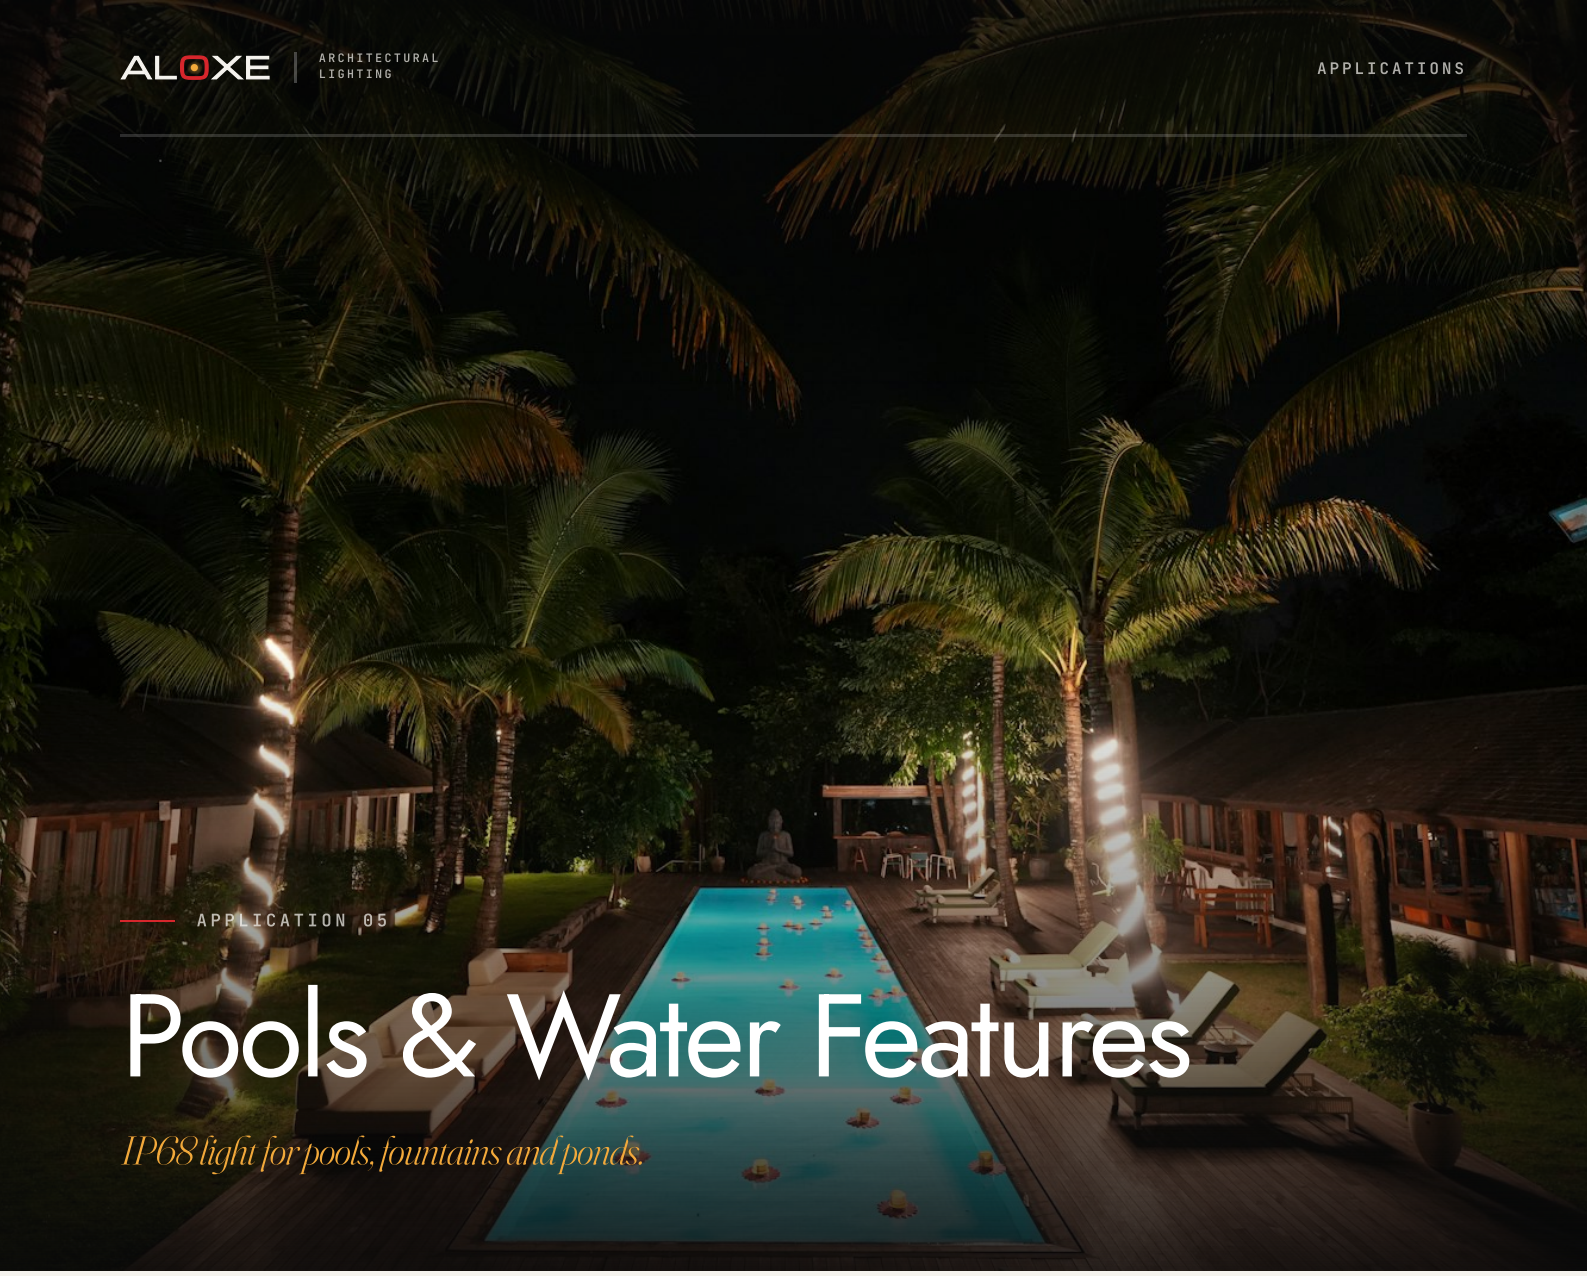

APPLICATION 05

Pools & Water Features

IP68 light for pools, fountains and ponds.

Stainless and ABS pool lights rated IP68 for permanent immersion, fountain rings and nozzles in RGB, and inground uplights to frame the water's edge. Low-voltage options keep installations safe.

RECOMMENDED FAMILIES

Underwater	p. 168
Inground & Foot	p. 184

START WITH THESE



BB-2028
Swimming Pool Lamp
p. 181



Underwater
Fountain Ring Light
p. 175



Underwater
AquaPro Elite Series Underwater LED Fixture
p. 169



CR6CL
Under Water Fitting
p. 174



APPLICATION 06

Galleries & Museums

Precision optics that frame the work, not the room.

Framing projectors cut light to the exact edge of a canvas with Ra 97 colour rendering; zoomable track spots adjust from 15° to 60° as exhibitions change; magnetic systems keep ceilings minimal.

RECOMMENDED FAMILIES

Track & Framing Spots p. 80

Magnetic & Cabinet p. 10

START WITH THESE



JX069TBF-30
Framing Track Spot
p. 81



TZ-2024
Zoom Track Spot
p. 85



J007FT
Framing Track Spot
p. 19



AXZOTR130
Zoomable COB Track Spotlight
p. 82



N° 01

Magnetic & Cabinet

48V / 24V magnetic track systems, linear modules, concealed spots and jewellery-cabinet lighting.

MAGNETIC LINEAR · CABINET LIGHT · MAGNETIC SPOT · TRACK & ACCESSORIES · SURFACE SPOT · CONCEALED SPOT · TRACK SPOT

69 LUMINAIRES · PAGES 11-79

Magnetic Linear



J011LD

J011LD

Magnetic Linear

Mini magnetic linear light in precision-machined aluminium with an electrostatic powder-coat finish; integrated heat dissipation delivers a rated 50,000-hour life with flicker-free, UV- and IR-free light that protects displayed items.

POWER	BEAM
3W	120°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J011LD
SERIES	Magnetic Linear
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	180LM
INPUT	DC24V
FINISH	Black
DIMENSIONS	200×12×9 mm
MOUNTING	Insert to the track Jx1700
CONTROL	Dimmable

Cabinet Light



J021P

J021P

Cabinet Pole Light

Purpose-designed pole spot for jewellery lighting with simple plug-and-play connection to the power supply, placed close to products to illuminate them precisely inside showcases.


POWER	BEAM
3W	15°–30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

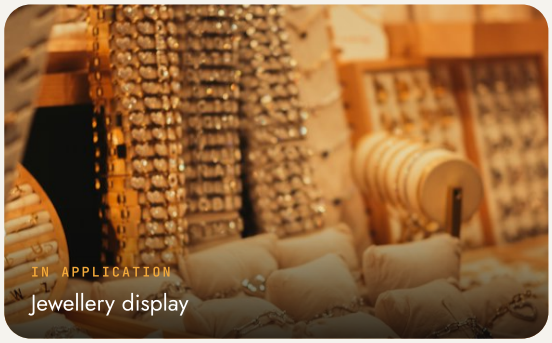

MAKE	ALOXE
MODEL	J021P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	20 mm head, 82 mm head height, 210 mm pole
MOUNTING	Surface mounted; Jx2100 BK
CONTROL	Dimmable

Cabinet Light



JX031P3

JX031P3

Cabinet Pole Light

Three-head pole spot purpose-designed for jewellery lighting, with plug-and-play power connection and heads placed close to the products for precise showcase illumination.


POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

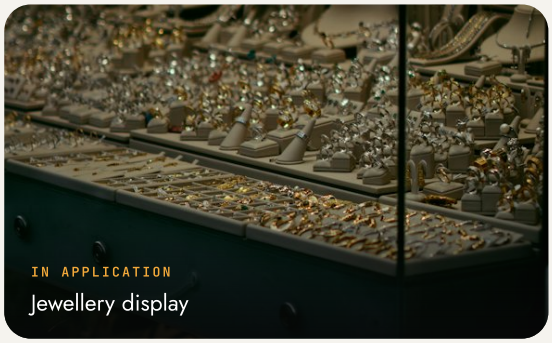

MAKE	ALOXE
MODEL	JX031P3
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	40 mm base, 250 mm height
MOUNTING	Surface mounted; Jx1900 BK
CONTROL	Dimmable

Cabinet Light



J002L

Linear Light

Super-slim linear light with a high-quality LED source; mercury-free and free of red and UV radiation to protect displayed items while providing key lighting.


POWER	BEAM
18W	120°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K · 4000K · 5000K · 6500K

APPLICATIONS

Pavilions, museum exhibitions, display cabinets, wardrobes

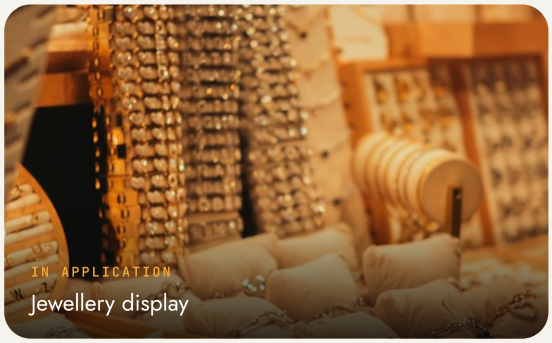

MAKE	ALOXE
MODEL	J002L
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	1500LM
INPUT	DC12V
FINISH	Black / White
DIMENSIONS	1000×300 mm, Ø14.3 mm bar, Ø12 mm legs
MOUNTING	Surface mounted; sizes Jx1–Jx6 (BK 2500–7000 / WH/S/G 2900–8500)
CONTROL	Dimmable

Cabinet Light



JX003L

Linear Light

Super-slim linear light with a high-quality LED source, available in custom sizes; mercury-free and free of red and UV radiation to protect displayed items.


POWER	BEAM
12W/M	120°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K


APPLICATIONS

Pavilions, museum exhibitions, display cabinets, wardrobes

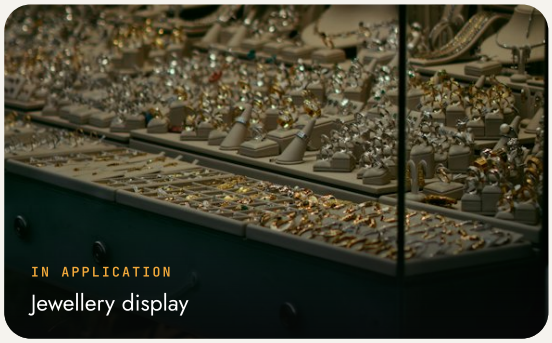

MAKE	ALOXE
MODEL	JX003L
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	95LM/W
INPUT	DC24V
FINISH	Black / White / Gold
DIMENSIONS	1000×300 mm, Ø10 mm bar, Ø6/Ø10 mm legs; customised sizes available
MOUNTING	Surface mounted; sizes Jx1–Jx6 (BK 2500–7000 / WH/S/G 2900–8500)
CONTROL	Dimmable

Magnetic Spot

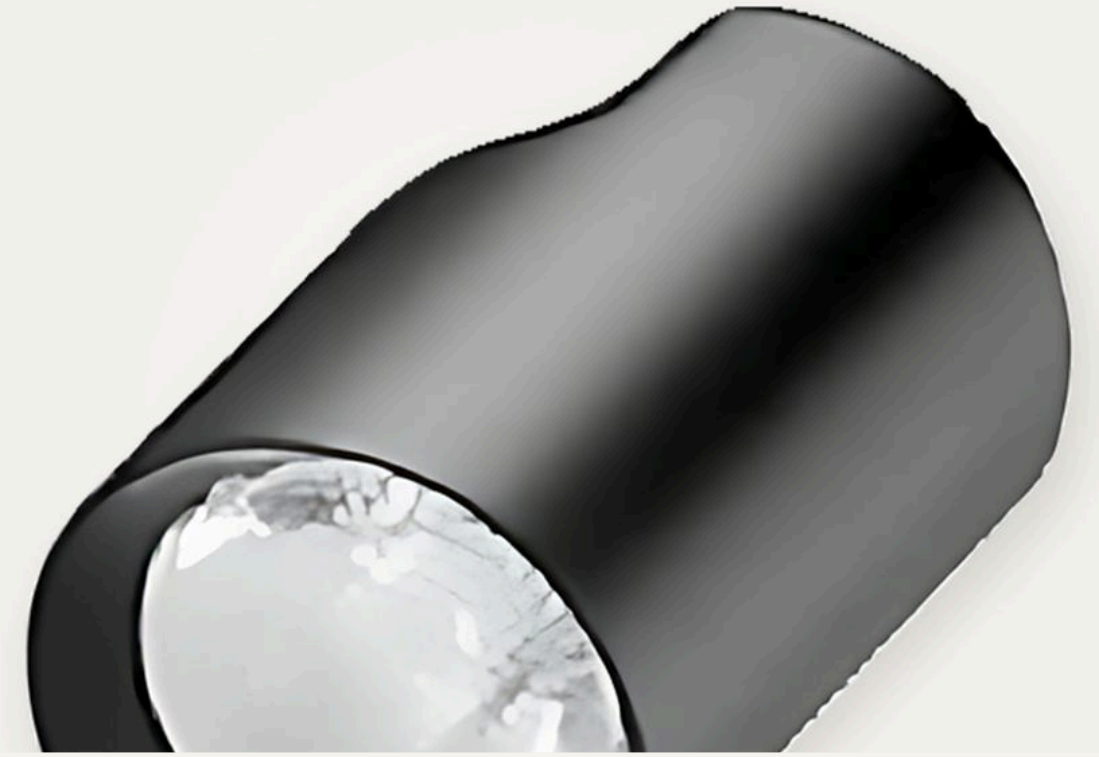

J004T

J004T

Magnetic Track Spot

Mini magnetic spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.

POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J004T
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	250LM
INPUT	DC24V
FINISH	Black / White
DIMENSIONS	50×12×8 mm adapter, Ø14 × 25 mm head
MOUNTING	Insert to the track JX-2400
CONTROL	Dimmable

Magnetic Spot



J005T

J005T

Magnetic Track Spot

Mini magnetic spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.


POWER	BEAM
5W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting

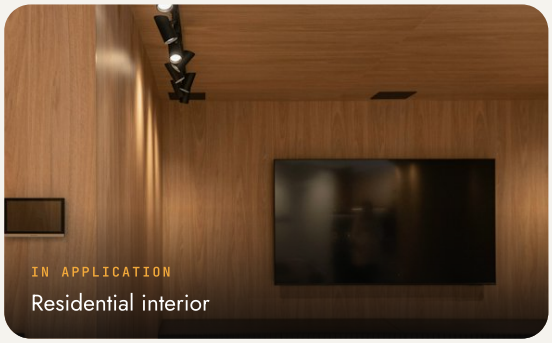

IN APPLICATION
Residential interior

MAKE	ALOXE
MODEL	J005T
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	400LM
INPUT	DC12V
FINISH	Black / White
DIMENSIONS	50×12×8 mm adapter, Ø33.5 × 57 mm head
MOUNTING	Insert to the track JX-3000
CONTROL	Dimmable

Magnetic Spot



J006ZT

J006ZT

Magnetic Zoomspot

Die-cast aluminium magnetic zoom spot with an adjustable beam angle for versatile accent lighting; on/off, phase-cut and DALI dimming options.


POWER	BEAM
5W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Retail stores, art galleries, residences, schools, museums, offices, hospitality, healthcare

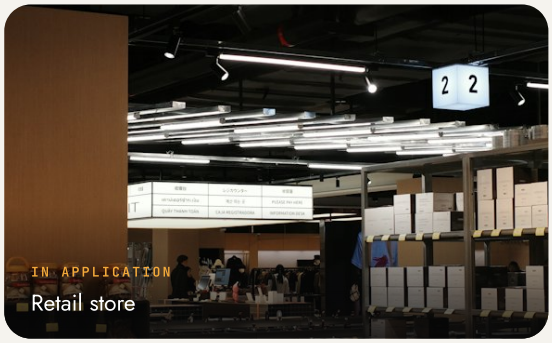

MAKE	ALOXE
MODEL	J006ZT
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	400LM
INPUT	24V
FINISH	Black
DIMENSIONS	51×12×9 mm adapter, Ø26 × 42.5–55.5 mm head, 90° tilt
MOUNTING	Insert to the track Jx2600
CONTROL	Dimmable

Magnetic Spot



J007FT

Framing Track Spot

Die-cast aluminium magnetic framing spot with adjustable beam and framing shutters for precise accent lighting; on/off, phase-cut and DALI dimming options.


POWER	BEAM
5W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Retail stores, art galleries, residences, schools, museums, offices, hospitality, healthcare

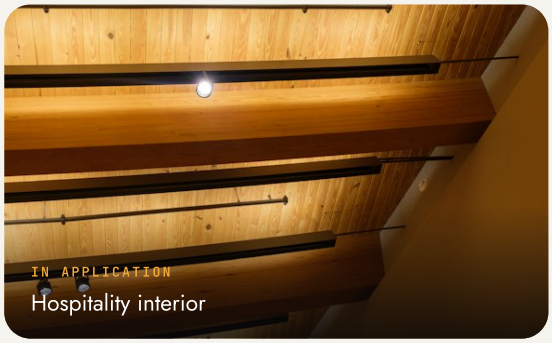

MAKE	ALOXE
MODEL	J007FT
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	400LM
INPUT	24V
FINISH	Black
DIMENSIONS	51×12×9 mm adapter, Ø20 × 59.5–61 mm head
MOUNTING	Insert to the track Jx13000
CONTROL	Dimmable

Magnetic Spot



J008DT

J008DT

Spot With Dimmer

Magnetic track spot with an on-board dimmer knob, precision-machined aluminium body and integrated heat dissipation for a rated 50,000-hour life with flicker-free, UV-free light.


POWER	BEAM
5W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting

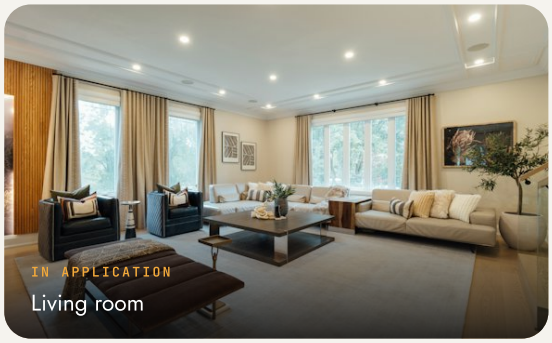

MAKE	ALOXE
MODEL	J008DT
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	400LM
INPUT	DC24V
FINISH	Black
DIMENSIONS	60×9 mm adapter, Ø35 × 57 mm head
MOUNTING	Insert to the track Jx3500
CONTROL	Dimmable

Magnetic Spot



J009MT

J009MT

Magnetic Spot

Mini magnetic spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.

POWER	BEAM
1W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K


APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J009MT
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	95LM
INPUT	DC24V
FINISH	Black
DIMENSIONS	54×12×9 mm adapter, Ø19 mm head, 16.5 mm drop
MOUNTING	Insert to the track JX 3000
CONTROL	Dimmable

Magnetic Spot

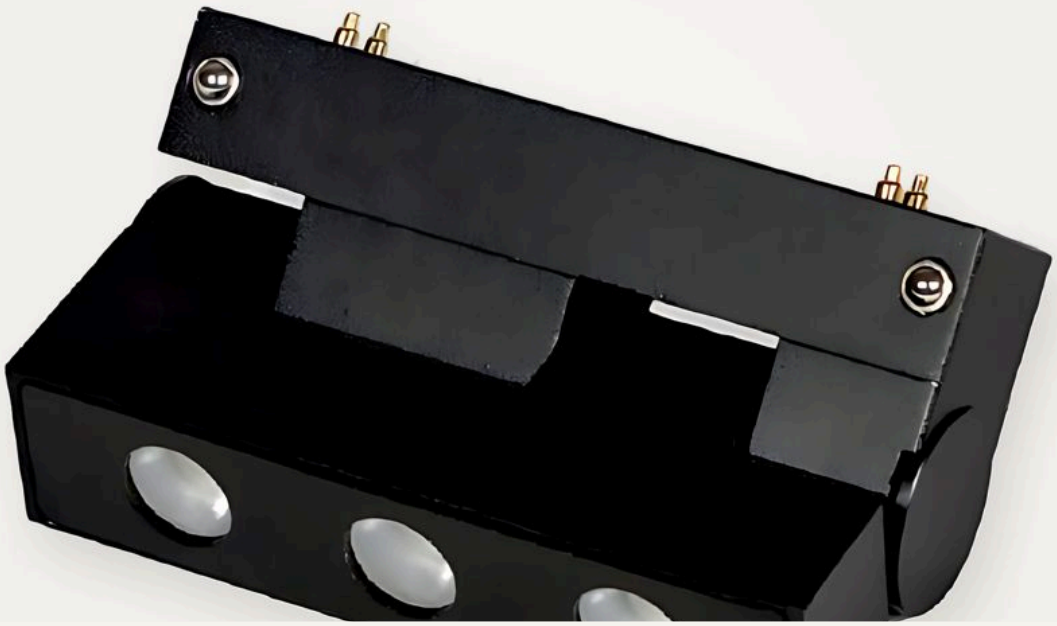

J010TL

J010TL

Magnetic Linear Spot

Tiltable three-head magnetic linear spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.


POWER	BEAM
3W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting

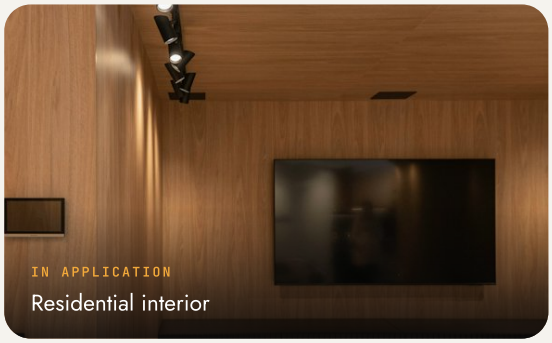

IN APPLICATION
Residential interior

MAKE	ALOXE
MODEL	J010TL
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	240LM
INPUT	DC24V
FINISH	Black
MOUNTING	Insert to the track Jx2400
CONTROL	Dimmable

Magnetic Linear



J012L3

J012L3

Linear Lense Spot

Six-lens magnetic linear spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.


POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K


APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting

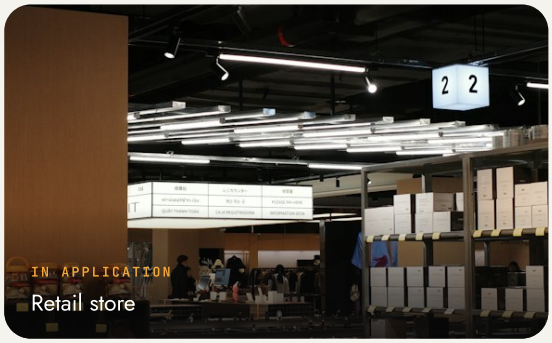

MAKE	ALOXE
MODEL	J012L3
SERIES	Magnetic Linear
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	280LM
INPUT	DC24V
FINISH	Black / White
DIMENSIONS	100×12×8 mm
MOUNTING	Insert to the track Jx2600 BK
CONTROL	Dimmable

Magnetic Linear

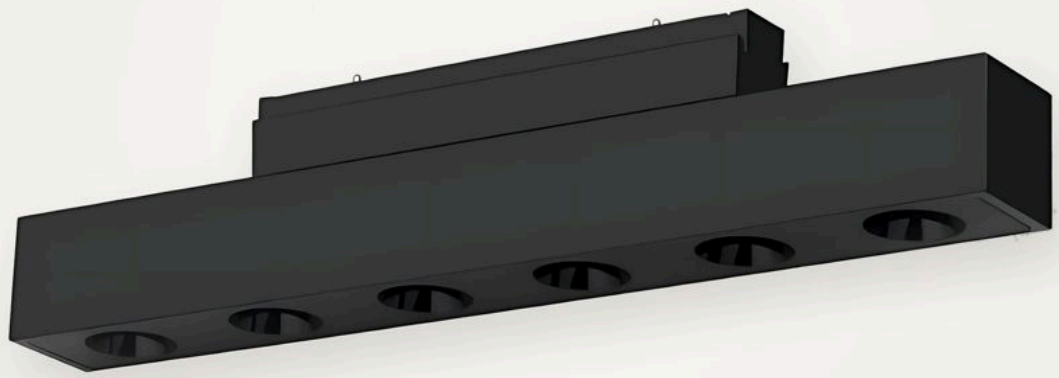

J013L6

J013L6

Linear Lense Spot

Six-lens recessed magnetic linear spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.


POWER	BEAM
6W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting

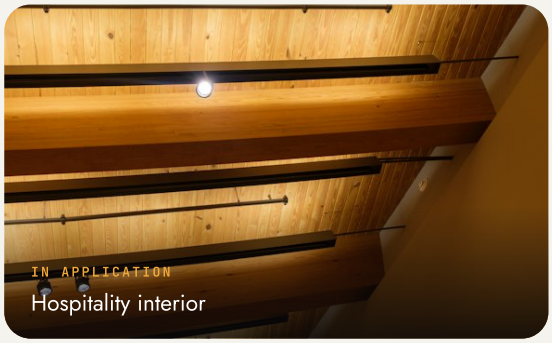

MAKE	ALOXE
MODEL	J013L6
SERIES	Magnetic Linear
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	420LM
INPUT	DC24V
FINISH	Black
DIMENSIONS	118×14×14 mm
MOUNTING	Insert to the track Jx2800
CONTROL	Dimmable

Track & Accessories



J015T

J015T


Magnetic Track

Precision-moulded aluminium alloy magnetic track with electrostatic powder coating; luminaires can be freely repositioned along its length, and a security clasp keeps them firmly in place.

PROTECTION
IP20

APPLICATIONS

Display cabinets, showcases

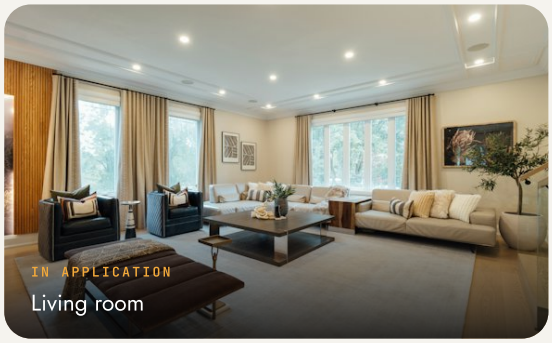

MAKE	ALOXE
MODEL	J015T
SERIES	Track & Accessories
INPUT	DC12V–24V
FINISH	Black
DIMENSIONS	1000×12×14 mm; 1000×15×15 mm (triangular, 20 mm face)
MOUNTING	Insert to the track Jx1200

Magnetic Linear



JX014LM

JX014LM

Movable Linear Spot

Six-head adjustable linear spot in precision-moulded aluminium alloy with electrostatic powder coating; slides freely along the magnetic track for flexible repositioning at any time.

POWER	BEAM
12W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Display cabinets, retail showcases



MAKE	ALOXE
MODEL	JX014LM
SERIES	Magnetic Linear
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	1000LM
INPUT	12V–24V
FINISH	Black
DIMENSIONS	130×22×42 mm
MOUNTING	Insert to the track Jx3600
CONTROL	Dimmable

Track & Accessories



J016T

J016T


Magnetic Track

Precision-moulded aluminium alloy magnetic track with electrostatic powder coating; luminaires can be freely repositioned along its length, and a security clasp keeps them firmly in place.

PROTECTION
IP20


APPLICATIONS

Display cabinets, showcases

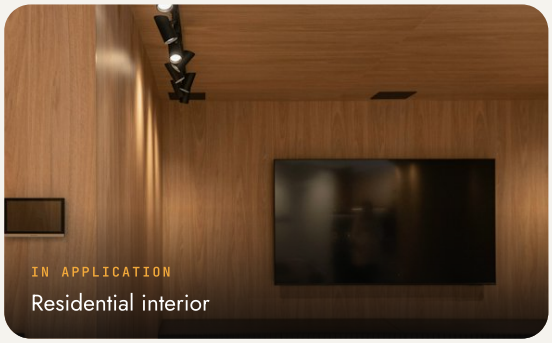

MAKE	ALOXE
MODEL	J016T
SERIES	Track & Accessories
INPUT	DC12V–24V
FINISH	Black
DIMENSIONS	22×18 mm profile
MOUNTING	The track Jx2000

Cabinet Light

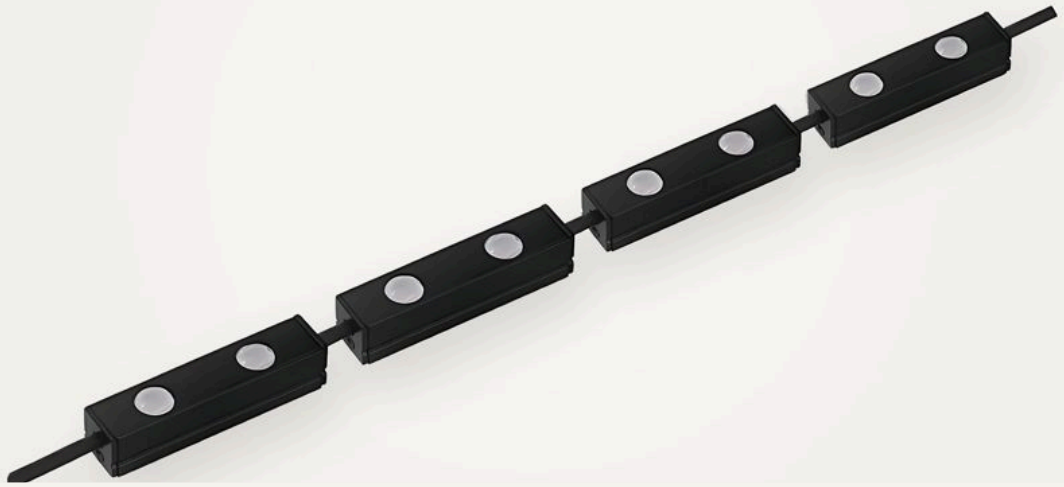

J017MO

J017MO

Modules

Chain-linked twin-lens LED modules in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.


POWER	BEAM
4W per piece	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting

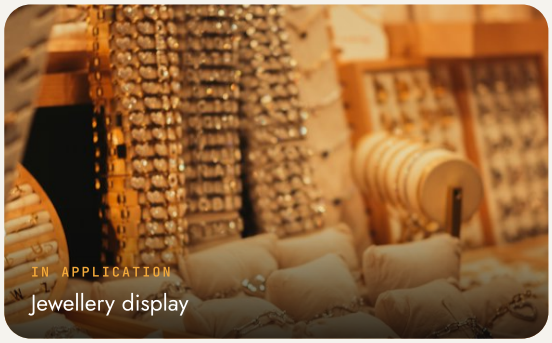

MAKE	ALOXE
MODEL	J017MO
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	180LM
INPUT	24V
FINISH	Black / White
DIMENSIONS	63×14 mm
MOUNTING	Surface mounted; Jx8800
CONTROL	Dimmable

Track & Accessories



J018CT

J018CT


Conceal Track

Recessed magnetic track in precision-moulded aluminium alloy with electrostatic powder coating; luminaires can be freely repositioned, with a security clasp for a secure hold.

PROTECTION
IP20

APPLICATIONS

Display cabinets, showcases

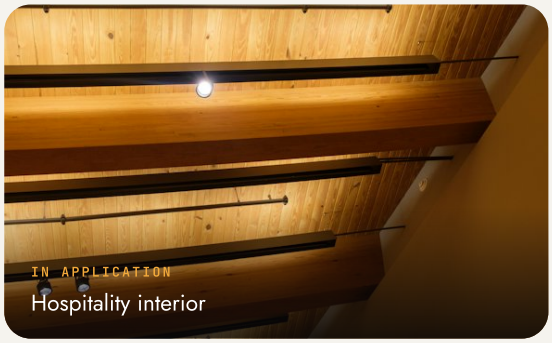

MAKE	ALOXE
MODEL	J018CT
SERIES	Track & Accessories
INPUT	DC12V / DC24V, 3A input current
FINISH	Black
DIMENSIONS	17×12 mm profile (14 mm inner)
MOUNTING	Concealed; Jx1600

Cabinet Light



J019LP

J019LP

Cabinet Pole Light

Slim bendable pole light with a linear LED head, purpose-designed for jewellery lighting, with plug-and-play power connection for close-range showcase illumination.


POWER	BEAM
5W	120°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

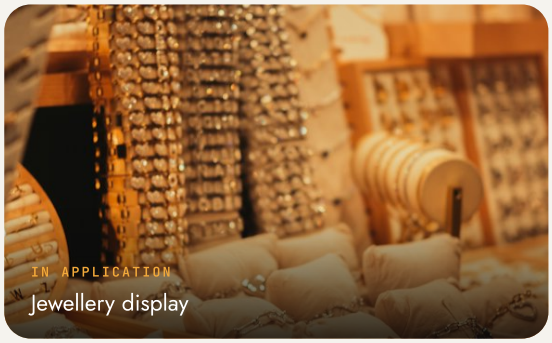

MAKE	ALOXE
MODEL	J019LP
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø8 mm pole, 275 mm height, 100 mm linear head, 25 mm base
MOUNTING	Surface mounted; Jx3000
CONTROL	Dimmable

Cabinet Light



J020P4

J020P4

Cabinet Pole Light

Four-lens tiltable pole spot purpose-designed for jewellery lighting, with plug-and-play power connection for close-range, precise showcase illumination.


POWER	BEAM
4W	15°–30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

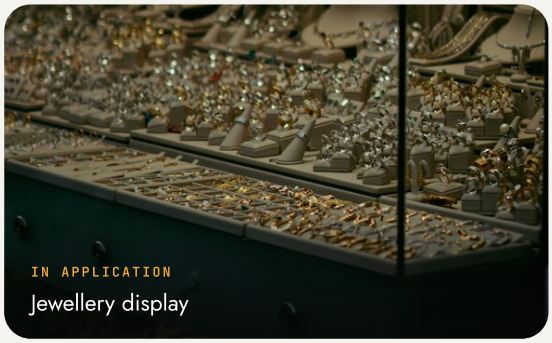

MAKE	ALOXE
MODEL	J020P4
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	350LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	175 mm height, 55 mm head
MOUNTING	Jx3800 BK
CONTROL	Dimmable

Cabinet Light



J022P3

J022P3

Cabinet Pole Light

Three-lens tiltable pole spot purpose-designed for jewellery lighting, with plug-and-play power connection for close-range, precise showcase illumination.


POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

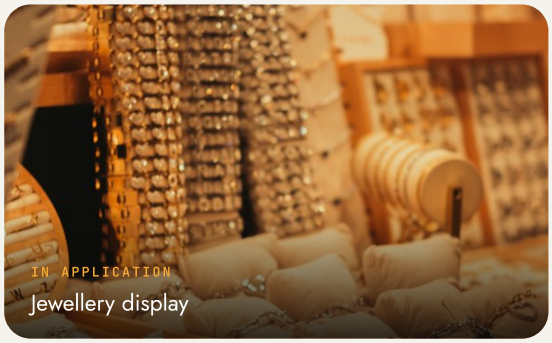

MAKE	ALOXE
MODEL	J022P3
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	20 mm head, 82 mm head height, 210 mm pole
MOUNTING	Surface mounted; Jx2400 BK
CONTROL	Dimmable

Cabinet Light



J023P

J023P

Cabinet Pole Light

Single- or double-spot tiltable pole light purpose-designed for jewellery lighting, with plug-and-play power connection for close-range showcase illumination.


POWER	BEAM
Single spot / 2.5W (double spot)	90°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

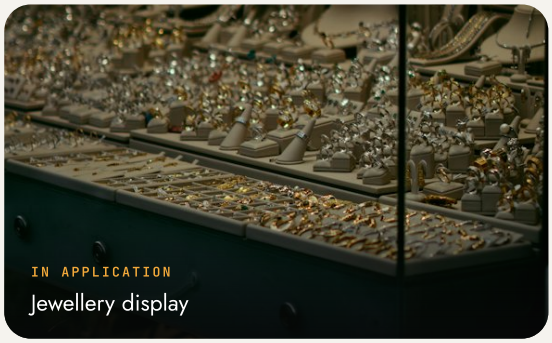

MAKE	ALOXE
MODEL	J023P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
INPUT	24V
FINISH	Black / White
DIMENSIONS	57×20×8 mm head, 145 mm height
MOUNTING	Surface mounted; Jx2300 BK
CONTROL	Dimmable

Cabinet Light



J024P3

J024P3

Cabinet Pole Light

Three-head adjustable pole spot purpose-designed for jewellery lighting, with plug-and-play power connection for close-range, precise showcase illumination.


POWER	BEAM
3W	25°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

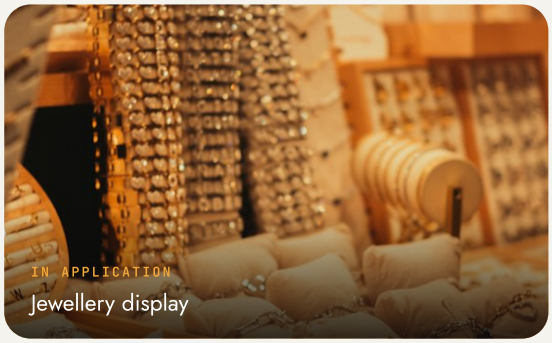

MAKE	ALOXE
MODEL	J024P3
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	165LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	221 mm height, Ø15 mm heads, Ø18 mm base
MOUNTING	Surface mounted; Jx4600 BK
CONTROL	Dimmable

Cabinet Light



J025P1

J025P1

Cabinet Pole Light

Single-head adjustable pole spot purpose-designed for jewellery lighting, with plug-and-play power connection for close-range, precise showcase illumination.


POWER	BEAM
1W	10°–60°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

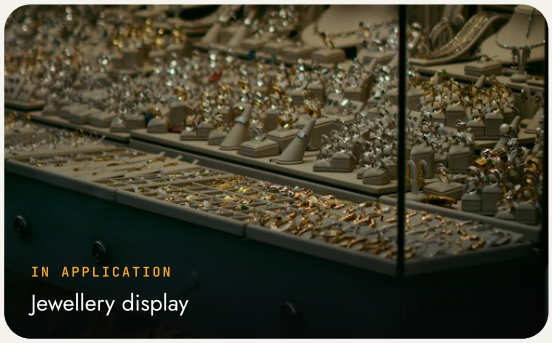

MAKE	ALOXE
MODEL	J025P1
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	110LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	Ø16 × 40 mm head, 170 mm height, Ø40 mm base
MOUNTING	Surface mounted; Jx2400
CONTROL	Dimmable

Cabinet Light



J026PZ

J026PZ

Cabinet Pole Light

Pole-mounted zoom spot with an adjustable beam angle, purpose-designed for jewellery lighting with plug-and-play power connection for close-range showcase illumination.


POWER	BEAM
3W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

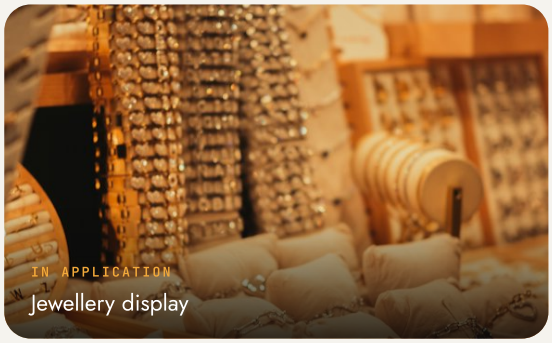

MAKE	ALOXE
MODEL	J026PZ
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	180LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø16/Ø21 mm head; height customisable
MOUNTING	Surface mounted; Jx3000 BK
CONTROL	Dimmable

Cabinet Light



JX027P

JX027P

Cabinet Pole Light

Twin-head adjustable pole spot purpose-designed for jewellery lighting, with plug-and-play power connection for close-range, precise showcase illumination.


POWER	BEAM
6W	25° / 30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

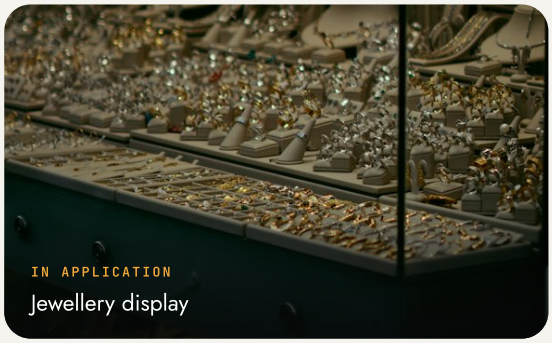

IN APPLICATION
Jewellery display

MAKE	ALOXE
MODEL	JX027P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	600LM
INPUT	Driver
FINISH	Black / White / Silver
DIMENSIONS	250 mm height, Ø20 × 37.5 mm heads
MOUNTING	Surface mounted; Jx3000 BK
CONTROL	Dimmable

Cabinet Light



J028P

J028P

Cabinet Pole Light

Slim angled pole light with integrated multi-point LEDs, purpose-designed for jewellery lighting with plug-and-play power connection for close-range showcase illumination.


POWER	BEAM
3W	120°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K · 4000K · 5000K · 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

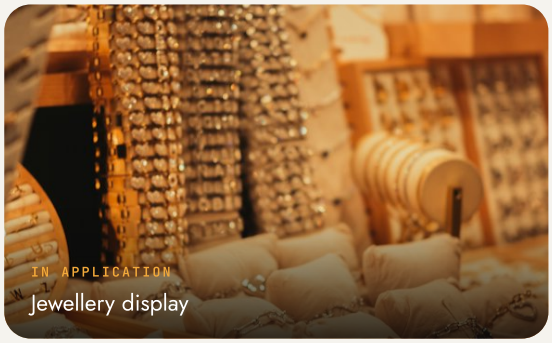

MAKE	ALOXE
MODEL	J028P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Black
DIMENSIONS	120 mm angled head, 170 mm pole, Ø18 mm base
MOUNTING	Surface mounted; Jx1900 BK
CONTROL	Dimmable

Cabinet Light



J029P

J029P

Cabinet Pole Light

T-head pole spot with a narrow beam, purpose-designed for jewellery lighting with plug-and-play power connection for close-range showcase illumination.


POWER	BEAM
2W	15°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

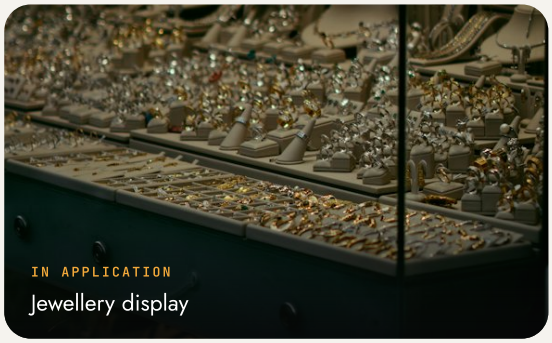

MAKE	ALOXE
MODEL	J029P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	44.5 mm × Ø15 mm head, 190 mm height
MOUNTING	Surface mounted; Jx1900 BK
CONTROL	Dimmable

Cabinet Light



J030P

J030P

Cabinet Pole Light

Compact single-head pole spot purpose-designed for jewellery lighting, with plug-and-play power connection for close-range, precise showcase illumination.


POWER	BEAM
1W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

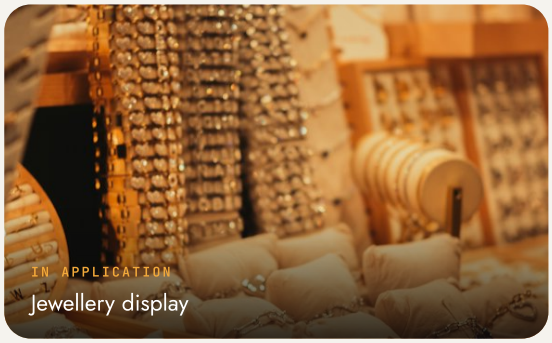

MAKE	ALOXE
MODEL	J030P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	100LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	Ø25 mm head, 168 mm height, Ø12 mm base
MOUNTING	Surface mounted; Jx900 BK-SIL
CONTROL	Dimmable

Cabinet Light



J032P

J032P

Cabinet Pole Light

Three-LED angled pole light with precision optics and a smooth, refined finish; mercury-free with no red or UV emission, protecting both people and displayed items.


POWER	BEAM
3×1W	45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery showcases, display cabinets

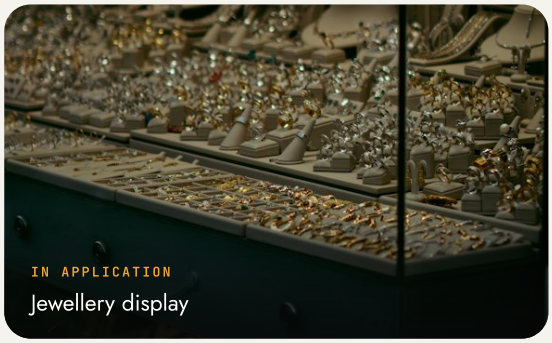

MAKE	ALOXE
MODEL	J032P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	280LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	75×14.8 mm head, 220 mm height, Ø10 mm pole
MOUNTING	Surface mounted; Jx3200 BK
CONTROL	Dimmable

Cabinet Light



JX033P

Cabinet Pole Light

Slim pole spot with a fully adjustable head (90° tilt, 360° rotation), purpose-designed for jewellery lighting with plug-and-play power connection.


POWER	BEAM
3W	10°–60°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K · 4000K · 5000K · 6500K

APPLICATIONS

Glass display showcases, jewellery showcases, showrooms

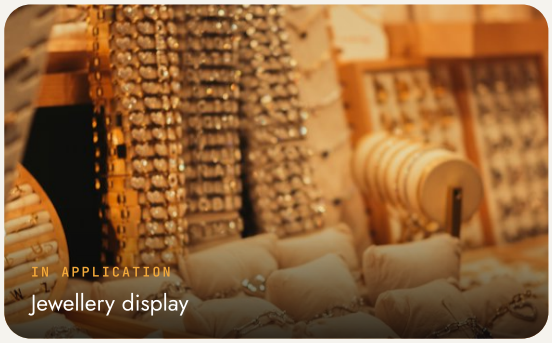

MAKE	ALOXE
MODEL	JX033P
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	165LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø20 × 32 mm head (90° tilt, 360° rotation), Ø8 mm pole, Ø18/Ø12 mm base
MOUNTING	Surface mounted; Jx1900 BK
CONTROL	Dimmable

Track & Accessories



JX034T

JX034T


Magnetic Pole

Vertical magnetic track pole in precision-moulded aluminium alloy with electrostatic powder coating; magnetic luminaires can be freely positioned along it and secured with a safety clasp.

PROTECTION
IP20

APPLICATIONS

Display cabinets, jewellery showcases

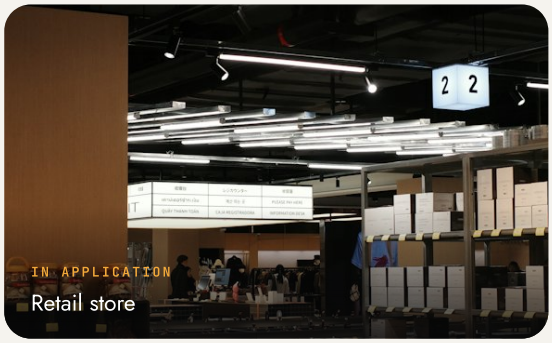

MAKE	ALOXE
MODEL	JX034T
SERIES	Track & Accessories
INPUT	DC12V / DC24V, 3A input current
FINISH	Black
DIMENSIONS	Ø14 mm pole, Ø16 mm cap, Ø18/Ø24/Ø10 mm base
MOUNTING	Surface; JX 1600 BK

Magnetic Spot



J036H

J036H

Magnetic Spot

Mini magnetic spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.


POWER	BEAM
3.5W	6°–60°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting

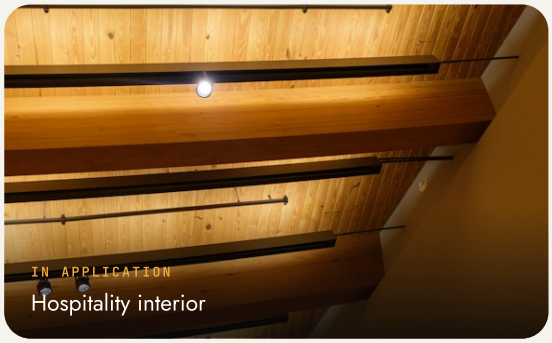

MAKE	ALOXE
MODEL	J036H
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	12V–24V
FINISH	Black / White
DIMENSIONS	30×10 mm adapter, Ø28 × 50 mm head
MOUNTING	Insert to the track Jx5600 BK
CONTROL	Dimmable

Magnetic Spot



JX035HT

JX035HT

Magnetic Spot

Mini magnetic spot in precision-machined aluminium with electrostatic powder coating; integrated heat dissipation gives a rated 50,000-hour life with flicker-free, UV-free light.

POWER	BEAM
2W	15°–30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch and antique display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	JX035HT
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	150LM
INPUT	12V–24V
FINISH	Black / White
DIMENSIONS	30×10 mm adapter, Ø22 × 35 mm head
MOUNTING	Insert to the track Jx4000 BK
CONTROL	Dimmable

Magnetic Spot



J037HZ

J037HZ

Magnetic Spot

Mini zoomable magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.

POWER	BEAM
3W / 5W	6°-60°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J037HZ
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	250LM
INPUT	DC12V-24V
FINISH	Black / White
DIMENSIONS	30×18×45 mm (Ø25)
MOUNTING	Insert to the track Jx5600 BK
CONTROL	Dimmable



JX038HZ

Magnetic Spot

Mini magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	PROTECTION
3W	IP20
CRI	
80Ra	

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

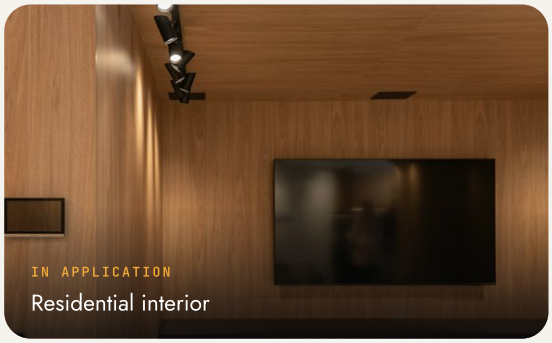

MAKE	ALOXE
MODEL	JX038HZ
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	250LM
INPUT	DC12V-24V
FINISH	Black / White
DIMENSIONS	30×10×42 mm (Ø22)
MOUNTING	Insert to the track Jx4000 BK
CONTROL	Dimmable

Magnetic Spot



J039H5

J039H5

Magnetic Spot

Magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
5W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K


APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

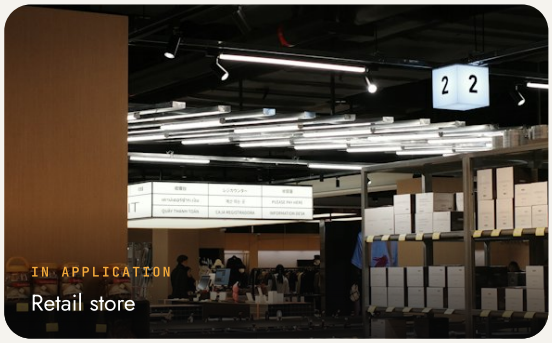

MAKE	ALOXE
MODEL	J039H5
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	400LM
INPUT	DC12V-24V
FINISH	Black
DIMENSIONS	30×10×58 mm (Ø33)
MOUNTING	Insert to the track Jx5000 BK
CONTROL	Dimmable

Track & Accessories

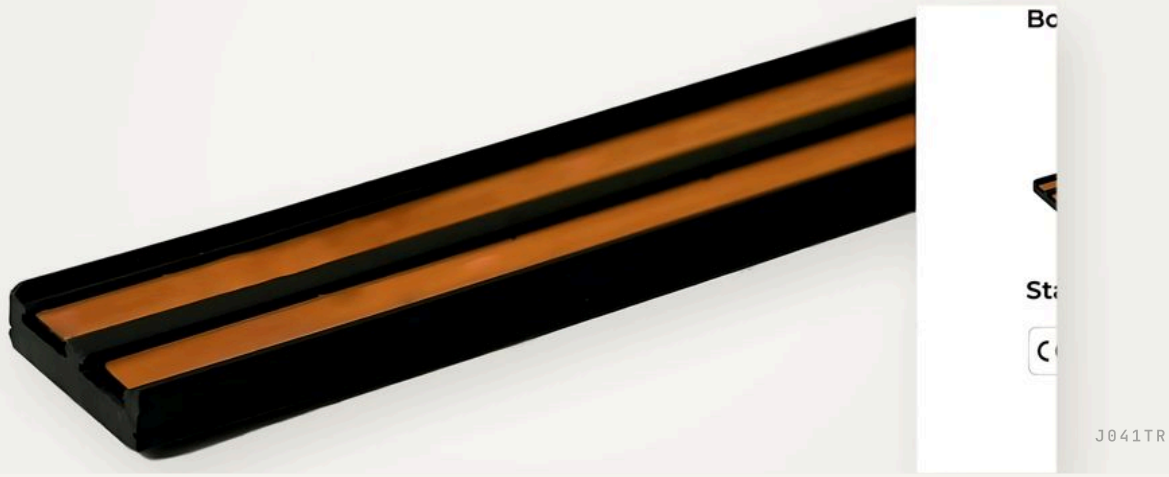

J041TR


Magnetic Track

Precision-moulded aluminium alloy magnetic track with electrostatic powder-coated finish and a security clasp. Lights can be freely positioned and repositioned anywhere along the track.

PROTECTION
IP20


APPLICATIONS

Display cabinets, retail and showroom lighting systems

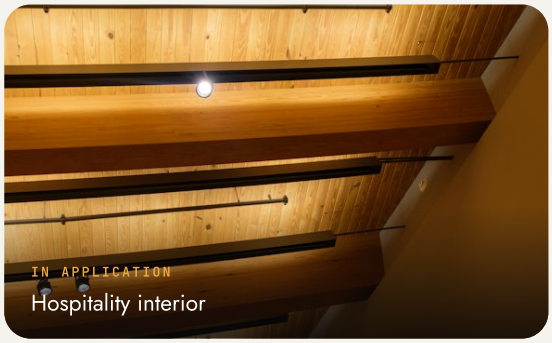

MAKE	ALOXE
MODEL	J041TR
SERIES	Track & Accessories
INPUT	DC12V-24V
FINISH	Black
DIMENSIONS	20×5 mm profile
MOUNTING	The track Jx1800

Magnetic Linear

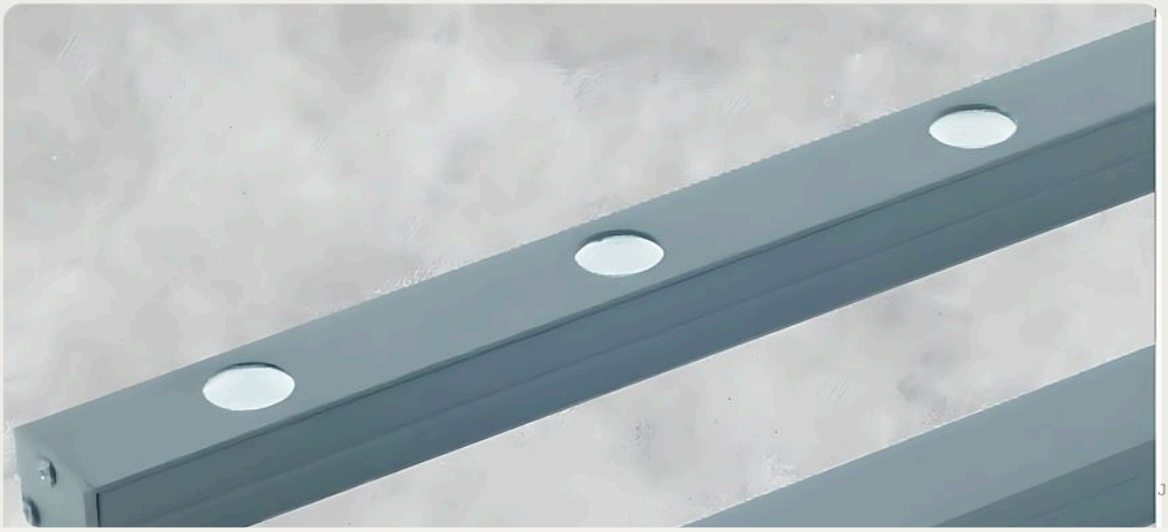

J040H

Linear Magnetic

Linear magnetic light with multiple spot optics, precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.

POWER	BEAM
6W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J040H
SERIES	Magnetic Linear
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	600LM
INPUT	DC24V
FINISH	Grey
DIMENSIONS	300×18×10 mm
MOUNTING	Insert to the track Jx4400 BK
CONTROL	Dimmable

Track & Accessories



J042TR

J042TR

Magnetic Corner Track

Precision-moulded aluminium alloy corner track with electrostatic powder-coated finish and a security clasp. Lights can be freely positioned and repositioned anywhere along the track.

PROTECTION
IP20

APPLICATIONS

Cabinet corners, display cabinets and showroom lighting systems



MAKE	ALOXE
MODEL	J042TR
SERIES	Track & Accessories
INPUT	DC12V-24V
FINISH	Black
DIMENSIONS	25×25 mm (35 mm diagonal) profile
MOUNTING	The track Jx3000 BK



J042T

Magnetic Spot

Mini magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
3W	25°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K · 4000K · 5000K · 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

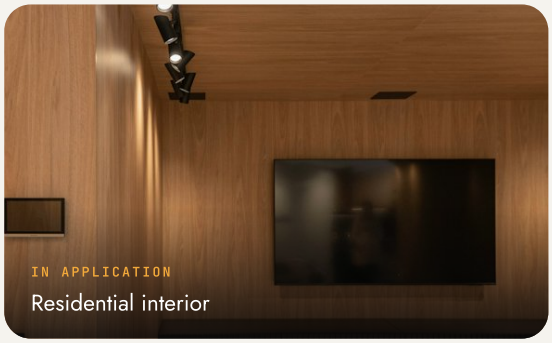

MAKE	ALOXE
MODEL	J042T
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	250LM
INPUT	DC24V
FINISH	Black / White
DIMENSIONS	60×8 mm base, 40 mm body (Ø19)
MOUNTING	Insert to the track Jx2100 BK / Jx2300 WH
CONTROL	Dimmable

Magnetic Spot



J044T

J044T

Magnetic Spot

Mini magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
1W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

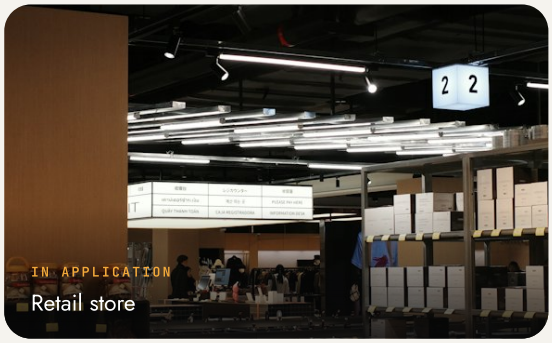

MAKE	ALOXE
MODEL	J044T
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	120LM
INPUT	DC12V-24V
FINISH	Black
DIMENSIONS	60×11 mm base, 25 mm body (Ø15)
MOUNTING	Insert to the track Jx1300 BK
CONTROL	Dimmable

Magnetic Spot



J045TZ

J045TZ

Magnetic Spot

Mini magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

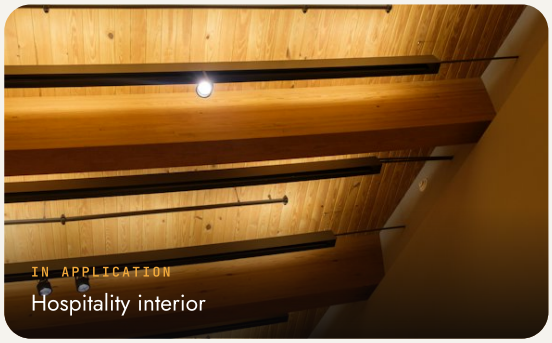

MAKE	ALOXE
MODEL	J045TZ
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	180LM
INPUT	DC12V-24V
FINISH	Black / White
DIMENSIONS	60×8 mm base, 40 mm body (Ø19)
MOUNTING	Insert to the track Jx2600 BK
CONTROL	Dimmable



J046T

Magnetic Spot

Mini magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.

POWER	BEAM
1W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J046T
SERIES	Magnetic Spot
LED MAKE	OSRAM
LUMINOUS FLUX	100LM
INPUT	DC12V-24V
FINISH	Black / White
DIMENSIONS	60×8 mm base, 35 mm body (Ø19)
MOUNTING	Insert to the track JX1600 BK
CONTROL	Dimmable

Track & Accessories



J047TR

J047TR

Magnetic Track

Precision-moulded aluminium alloy magnetic track with electrostatic powder-coated finish and a security clasp; lights can be freely repositioned. Recommended 5 lights per metre, maximum 10 lights per set.

PROTECTION
IP20

APPLICATIONS

Display cabinets, retail and showroom lighting systems



MAKE	ALOXE
MODEL	J047TR
SERIES	Track & Accessories
INPUT	DC24V
FINISH	Black / White
DIMENSIONS	15×8 mm profile, length customised
MOUNTING	Track JX1200 BK

Magnetic Spot



J048T

J048T

Magnetic Spot

Mini magnetic spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

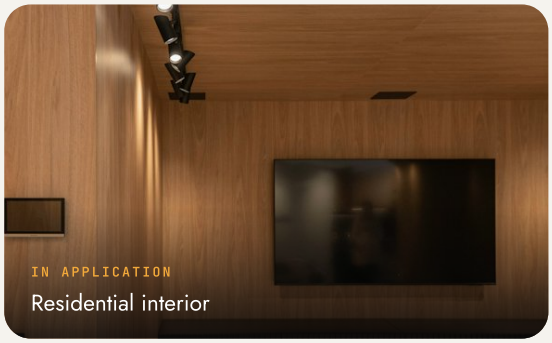

IN APPLICATION
Residential interior

MAKE	ALOXE
MODEL	J048T
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	DC12V / DC24V
FINISH	Black / White
DIMENSIONS	37 mm base, 34 mm body (Ø17)
MOUNTING	Insert to the track JX1300 BK
CONTROL	Dimmable

Magnetic Spot



J049T

J049T

Magnetic Spot

Magnetic spot light with a 360° rotatable head, precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
5W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

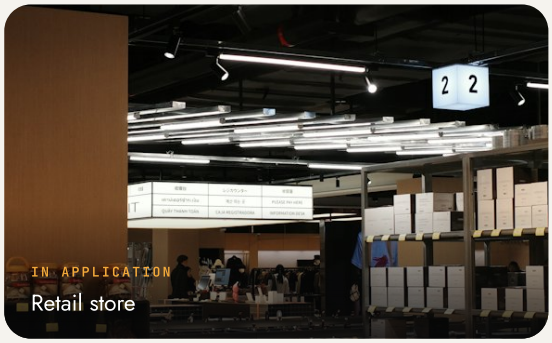

MAKE	ALOXE
MODEL	J049T
SERIES	Magnetic Spot
LED MAKE	OSRAM
LUMINOUS FLUX	420LM
INPUT	DC12V / DC24V
FINISH	Black / White
DIMENSIONS	35×6 mm base, 41 mm body (Ø32), 360° rotatable
MOUNTING	Insert to the track JX3000 BK
CONTROL	Dimmable



J050T

Magnetic Spot

Mini magnetic spot light with a 360° rotatable head, precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K · 4000K · 5000K · 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

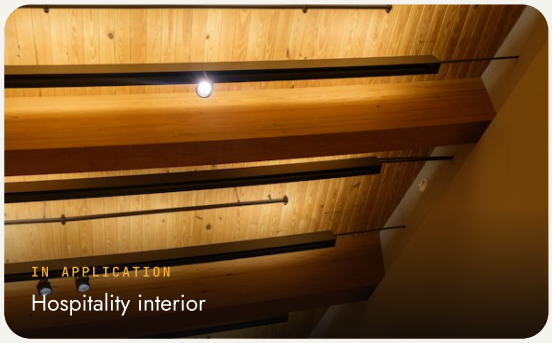

MAKE	ALOXE
MODEL	J050T
SERIES	Magnetic Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	165LM
INPUT	DC12V / DC24V
FINISH	Black / White
DIMENSIONS	35×6 mm base, 29 mm body (Ø24), 360° rotatable
MOUNTING	Insert to the track JX3800 BK
CONTROL	Dimmable



JX051H

Surface Spot

Mini surface spot light with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.

POWER	BEAM
3W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K · 4000K · 5000K · 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	JX051H
SERIES	Surface Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	50×28×53 mm, ±60° tilt
MOUNTING	Surface mounted JX5500 BK
CONTROL	Dimmable

Surface Spot



J052S

J052S

Surface Spot

Super-mini surface spot with high-quality LED chips, efficient anti-glare optics and excellent thermal management, available in multiple colour temperatures for accent lighting.

POWER	BEAM
1W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Pavilions, museum exhibition spaces, display cabinets, wardrobes and closets



MAKE	ALOXE
MODEL	J052S
SERIES	Surface Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	80LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø9.5×21 mm head, 5.5 mm base
MOUNTING	Surface mounted Jx1600 BK
CONTROL	Dimmable

Surface Spot



J053S

J053S

Surface Spot

Super-mini adjustable surface spot with high-quality LED chips, efficient anti-glare optics and excellent thermal management, available in multiple colour temperatures for accent lighting.


POWER	BEAM
1W / 3W	30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Pavilions, museum exhibition spaces, display cabinets, wardrobes and closets

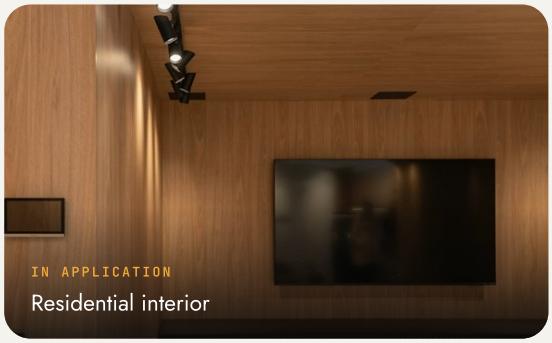

MAKE	ALOXE
MODEL	J053S
SERIES	Surface Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	120LM
FINISH	Black / White
DIMENSIONS	Ø20×21.5 mm head
MOUNTING	Surface mounted JX500 BK (1W) / JX800 BK (3W)
CONTROL	Dimmable

Concealed Spot



J054C

J054C

Conceal Spot

Recessed spot with a 360° adjustable head and high-brightness power LED. Anodised anti-rust, anti-oxidation shell for durable quality.

POWER	BEAM
3W	15°–30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Shop windows, jewellery counters, display counters, showrooms and museums



MAKE	ALOXE
MODEL	J054C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	300LM
INPUT	Driver
FINISH	Silver
DIMENSIONS	Ø65 mm outer, 25 mm depth
CUT-OUT	Ø45 mm
MOUNTING	Recessed JX800
CONTROL	Dimmable

Concealed Spot



J055C

J055C

Conceal Spot

Mini recessed spot with high-brightness power LED and adjustable beam. Anodised anti-rust, anti-oxidation shell for durable quality.


POWER	BEAM
1W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Shop windows, jewellery counters, display counters, showrooms and museums

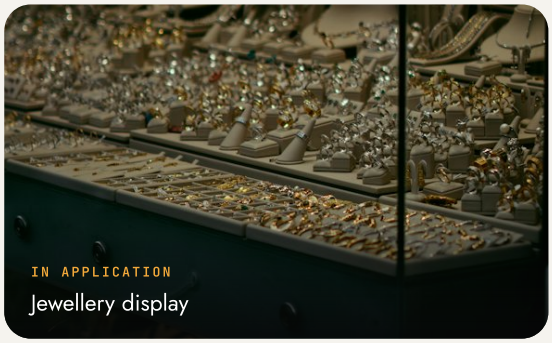

MAKE	ALOXE
MODEL	J055C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	95LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø15 mm face, Ø11.5×13.5 mm body
CUT-OUT	Ø13 mm
MOUNTING	Recessed JX900 BK
CONTROL	Dimmable

Concealed Spot



J056C

Conceal Spot

Mini recessed spot with lensed SMD LED for high brightness and durable quality. Anodised anti-rust, anti-oxidation shell.


POWER	BEAM
1W	60°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Shop windows, jewellery counters, display counters, showrooms and museums

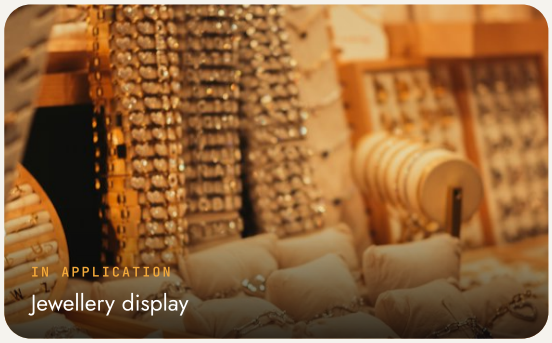

MAKE	ALOXE
MODEL	J056C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	120LM
INPUT	DC12V
FINISH	Black / Silver / White
DIMENSIONS	Ø20 mm face, Ø15×23 mm body
CUT-OUT	Ø15 mm
MOUNTING	Recessed JX300 BK / WH / SL
CONTROL	Dimmable

Concealed Spot



J062C

J062C

Conceal Spot

Mini recessed spot with eyelid trim in round or square, precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.

POWER	BEAM
3W	90°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J062C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	120LM
INPUT	Driver
FINISH	White
DIMENSIONS	Ø25×35 mm (round and square trims)
MOUNTING	Recessed JX900 WH
CONTROL	Dimmable

Concealed Spot



J058C

J058C

Conceal Spot

Mini recessed spot with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
1.5W	25°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

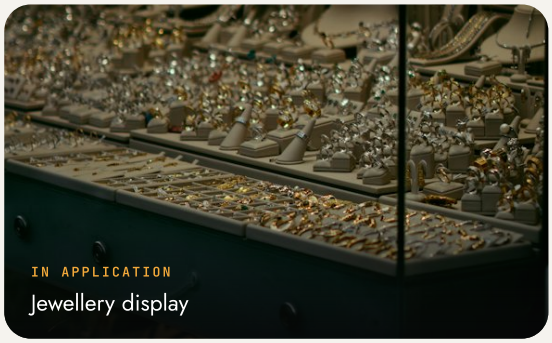

MAKE	ALOXE
MODEL	J058C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	200LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø35×34 mm
MOUNTING	Recessed JX1000
CONTROL	Dimmable

Concealed Spot



J059C

J059C

Conceal Spot

Mini adjustable recessed spot with high-brightness power LED. Anodised anti-rust, anti-oxidation shell for durable quality.


POWER	BEAM
1W	15°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Shop windows, jewellery counters, display counters, showrooms and museums

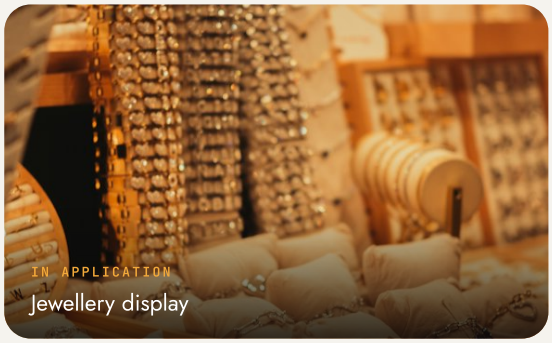

MAKE	ALOXE
MODEL	J059C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	150LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	Ø35 mm outer, Ø20 mm lens, 30 mm
MOUNTING	Recessed JX600 BK / SIL
CONTROL	Dimmable

Concealed Spot



J060C

J060C

Conceal Spot

Mini recessed spot in round or square trim with interchangeable straight and angled snoots, precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light.

POWER	BEAM
2W	90°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J060C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	15LM
INPUT	Driver
FINISH	White
DIMENSIONS	Ø25×38.5 mm (round and square trims), Ø15 snoots
MOUNTING	Recessed JX900 WH
CONTROL	Dimmable

Concealed Spot



J060C

J060C

Conceal Spot

Mini recessed slot-aperture spot in round or square trim with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.


POWER	BEAM
1.5W	90°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting

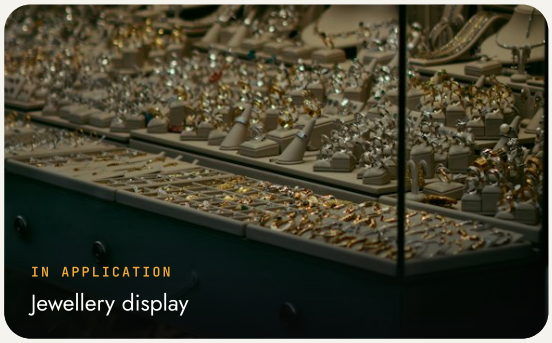

MAKE	ALOXE
MODEL	J060C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	150LM
INPUT	Driver
FINISH	White
DIMENSIONS	Ø25×38.5 mm (round and square trims)
MOUNTING	Recessed JX900 WH
CONTROL	Dimmable

Concealed Spot



J057CZ

J057CZ

Conceal Spot

Super-mini zoomable recessed spot with high-quality LED chips, efficient anti-glare optics and excellent thermal management, available in multiple colour temperatures for accent lighting.


POWER	BEAM
3W	6°-60°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Pavilions, museum exhibition spaces, display cabinets, wardrobes and closets

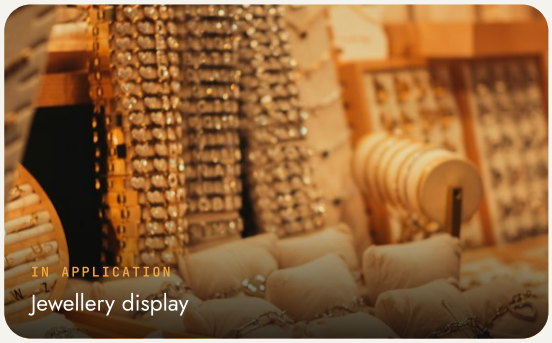

MAKE	ALOXE
MODEL	J057CZ
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	280LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	Ø48 mm face, Ø38 body, Ø20 nozzle, 42 mm height
MOUNTING	Recessed JX1800 BK
CONTROL	Dimmable

Concealed Spot



J063C

J063C

Conceal Spot

Mini recessed spot in round or square trim with a precision-machined aluminium body and electrostatic powder-coated finish. Integrated heat dissipation delivers up to 50,000 hours of flicker-free light with no UV or IR radiation.

POWER	BEAM
2W	90°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Jewellery, watch, antique and other display cabinets; small-space accent lighting



MAKE	ALOXE
MODEL	J063C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	120LM
INPUT	Driver
FINISH	White
DIMENSIONS	Ø25×35 mm (round and square trims)
MOUNTING	Recessed JX900 WH
CONTROL	Dimmable

Track Spot



J069TF

J069TF

Framing Track Spot

Die-cast aluminium framing spotlight for track systems with patented zoom optics (beam adjustable 15°–60°). Available with on/off, phase-cut or DALI dimming.


POWER	BEAM
10W / 20W / 30W	35°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 6500K

APPLICATIONS

Retail stores, art galleries, residences, schools, museums, offices, hospitality and healthcare

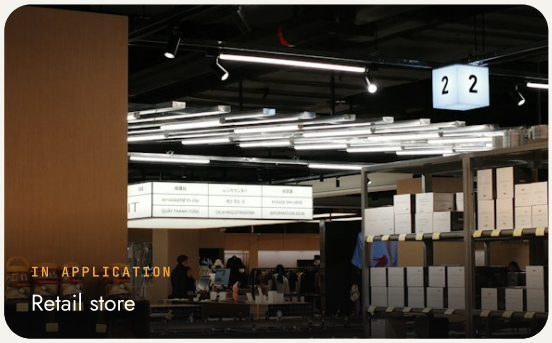

MAKE	ALOXE
MODEL	J069TF
SERIES	Track Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	100LM
INPUT	AC240V
FINISH	Black
DIMENSIONS	10W/20W: approx. 135–145 mm height; 30W: 165 mm height
MOUNTING	Insert to the track JX11000 BK (10W) / JX12000 BK, JX18000 WH (20W) / JX25000 BK (30W)
CONTROL	Dimmable

Track Spot



J067TZ

J067TZ

Zoom Track Spot

Die-cast aluminium zoom spotlight for track systems with patented zoom optics for a variable beam angle. Available with on/off, phase-cut or DALI dimming.


POWER	BEAM
10W / 20W / 30W	10°-60°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 6500K

APPLICATIONS

Retail stores, art galleries, residences, schools, museums, offices, hospitality and healthcare

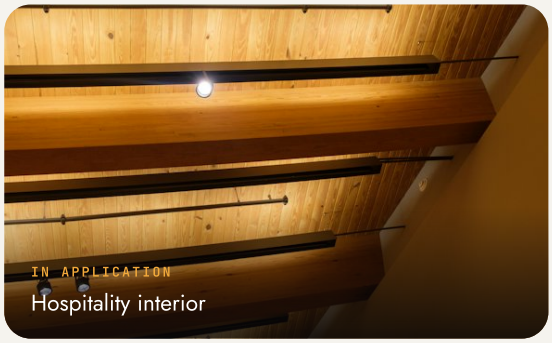

MAKE	ALOXE
MODEL	J067TZ
SERIES	Track Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	1800LM
INPUT	AC240V
FINISH	Black / White
DIMENSIONS	155 mm length; Ø55 (10W) / Ø65 (20W) / Ø85 (30W) mm
MOUNTING	Insert to the track JX3400 BK / 3800 WH (10W), JX4400 BK / 4800 WH (20W), JX5400 BK / 5800 WH (30W)
CONTROL	Dimmable

Concealed Spot



J066C

J066C

Conceal Spot

Mini recessed spot with a 360° adjustable head and high-brightness power LED. Anodised anti-rust, anti-oxidation shell for durable quality.

POWER	BEAM
3W	15°–45°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Shop windows, jewellery counters, display counters, showrooms and museums



MAKE	ALOXE
MODEL	J066C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	280LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø41.5 mm face, Ø32×24 mm body, 360° adjustable
CUT-OUT	Ø35 mm
MOUNTING	Recessed JX1500 BK
CONTROL	Dimmable

Concealed Spot



J065C

J065C

Conceal Spot

Mini adjustable recessed spot with high-brightness power LED. Anodised anti-rust, anti-oxidation shell for durable quality.


POWER	BEAM
3W	15°–30°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Shop windows, jewellery counters, display counters, showrooms and museums

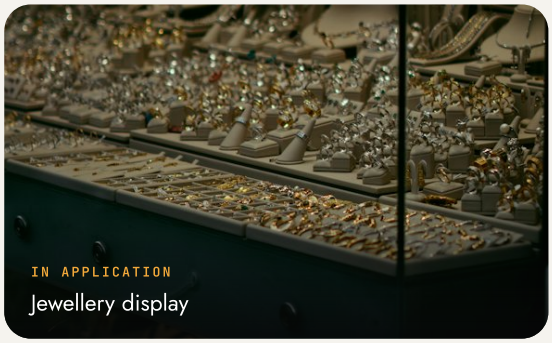

MAKE	ALOXE
MODEL	J065C
SERIES	Concealed Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	250LM
INPUT	Driver
FINISH	Black
DIMENSIONS	Ø30 mm face, Ø15 mm nozzle, 47 mm height
MOUNTING	Recessed JX1100 BK
CONTROL	Dimmable

Track Spot



J068TZ

J068TZ

Zoom Track Spot

Die-cast aluminium zoom spotlight for track systems with patented zoom optics for a variable beam angle. Available with on/off, phase-cut or DALI dimming.


POWER	BEAM
10W	20°-60°
PROTECTION	CRI
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Retail stores, art galleries, residences, schools, museums, offices, hospitality and healthcare

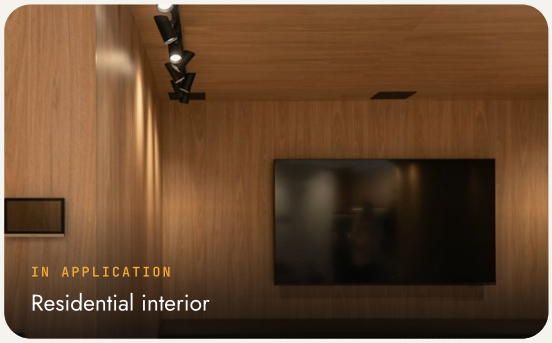

MAKE	ALOXE
MODEL	J068TZ
SERIES	Track Spot
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	2200LM
INPUT	AC240V
FINISH	Black
DIMENSIONS	Ø75×165 mm
MOUNTING	Insert to the track JX3000 BK
CONTROL	Dimmable

Cabinet Light



J001L

Linear Light

Super-mini bridge-style linear light with a row of high-quality LED points. Mercury-free light with no red-spectrum or UV emission protects displayed items.


POWER	BEAM
12W	90°
PROTECTION	**CRI**
IP20	80Ra

COLOUR TEMPERATURE

3000K 4000K 5000K 6500K

APPLICATIONS

Pavilions, museum exhibition spaces, display cabinets, wardrobes and closets

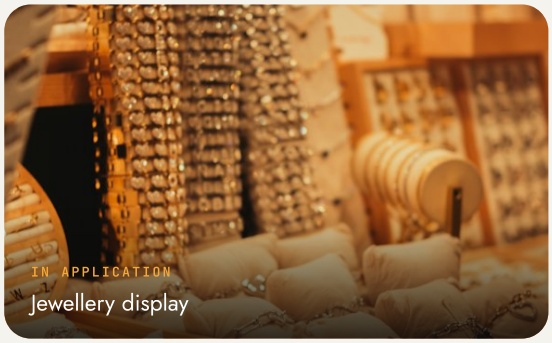

MAKE	ALOXE
MODEL	J001L
SERIES	Cabinet Light
LED MAKE	CREE / OSRAM
LUMINOUS FLUX	1200LM
INPUT	Driver
FINISH	Black / White
DIMENSIONS	635×145 mm, Ø10 mm tube
MOUNTING	Surface mounted Jx8800
CONTROL	Dimmable

Concealed Spot



Magnetic & Cabinet


Mini Spot Light

Mini recessed spot light with an aluminium body and 5050 LED, supplied with flying leads for 12V operation.

POWER	CRI
1W	80Ra

COLOUR TEMPERATURE

3000K 4000K 6000K

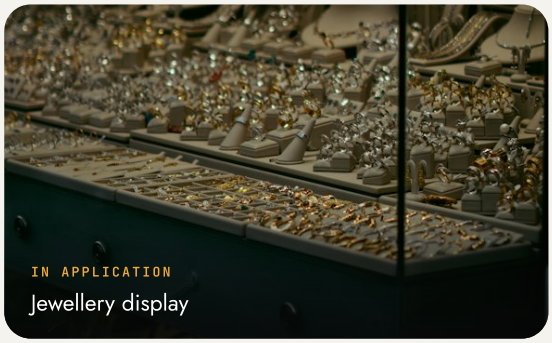

MAKE	ALOXE
SERIES	Concealed Spot
LED MAKE	5050 LED
LUMINOUS FLUX	95LM
INPUT	DC12V
FINISH	White / Black / Silver
DIMENSIONS	Ø20 mm outer, 22 mm depth
CUT-OUT	Ø15 mm
MOUNTING	Recessed



N° 02

Track & Framing Spots

Zoomable COB track spots, beam-adjustable heads and precision framing projectors.

FRAMING SPOT · TRACK SPOT

6 LUMINAIRES · PAGES 81–86

Framing Spot



JX069TBF-30

JX069TBF-30

Framing Track Spot

Precision framing projector with an 8-lens optical system and ≤2% distortion. Shape the beam into circles, squares, trapezoids or custom forms, and project gobos, logos or patterns with sharp edges.

POWER	BEAM
30W / 20W / 10W	25°–40°
PROTECTION	**CRI**
IP20	Ra97 (on/off)

COLOUR TEMPERATURE

2700K · 3000K · 3500K · 4000K · 2700-5700K tunable

APPLICATIONS

Art galleries, museums, retail features, hospitality, logo and signage projection



MAKE	ALOXE
MODEL	JX069TBF-30
SERIES	Framing Spot
INPUT	AC220–240V / AC100–240V 50/60Hz
FINISH	Black / White
DIMENSIONS	255 × 115 × 61 mm (30W)
MOUNTING	Recessed · Surface mounted · Track mounted
CONTROL	Onboard / 0-10V / DALI / DMX / Casambi / Zigbee / Bluetooth

Track Spot




AXZOTR130

AXZOTR130

Zoomable COB Track Spotlight

Versatile anti-glare track spotlight with a zoomable 15°-60° beam and die-cast aluminium body. Available with Triac, 0-10V and DALI dimming options.

POWER 10W / 20W / 30W	BEAM 15°-60° (zoomable)
CRI >90	

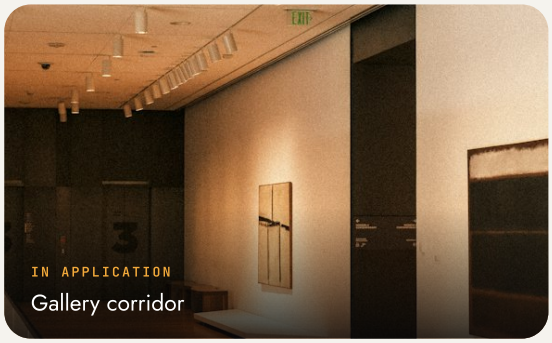

MAKE	ALOXE
MODEL	AXZOTR130
SERIES	Track Spot
LED MAKE	COB CREE
INPUT	220-240V AC, 50/60Hz
FINISH	Black / White
DIMENSIONS	10W: Ø55 × 120 mm; 20W: Ø65 × 135 mm; 30W: Ø85 × 163 mm
MOUNTING	Track mounted; single circuit (2/3-wire) or three circuit (4-wire) base
CONTROL	Dimmable



TZ-2025L


Track Spot (Beam Adjustable)

Beam-adjustable COB track spotlight in an aluminium alloy body with a 10°-60° beam. Available in dimmable and tunable options.

POWER	BEAM
20W	10°-60°

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · Red · Green · Blue

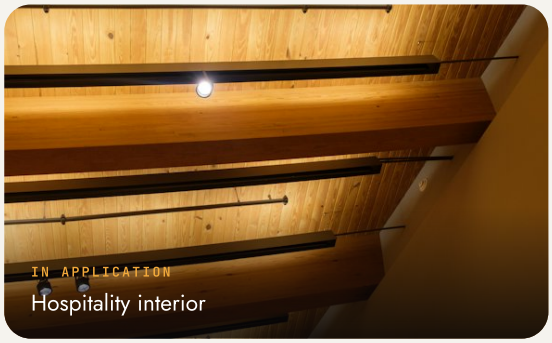

MAKE	ALOXE
MODEL	TZ-2025L
SERIES	Track Spot
LED MAKE	COB
INPUT	230V AC
FINISH	Black
DIMENSIONS	Ø58 × 155 mm
MOUNTING	Track mounted (2-wire adaptor)
CONTROL	Dimmable

Track Spot



TZ-2026L

02

TZ-2026L


Track Spot (Beam Adjustable)

Beam-adjustable COB track spotlight in an aluminium alloy body with a 10°-60° beam. Available in dimmable and tunable options.

POWER	BEAM
30W	10°-60°

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · Red · Green · Blue

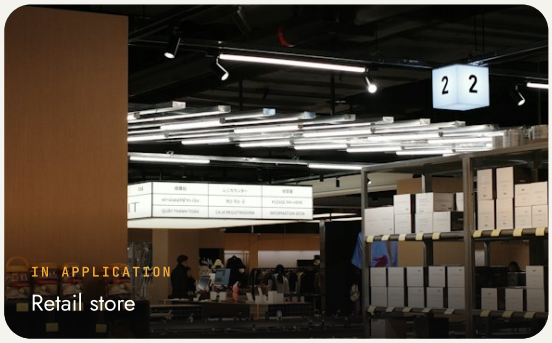

MAKE	ALOXE
MODEL	TZ-2026L
SERIES	Track Spot
LED MAKE	COB
INPUT	230V AC
FINISH	Black
DIMENSIONS	Ø68 × 160 mm
MOUNTING	Track mounted (2-wire adaptor)
CONTROL	Dimmable

Track Spot



TZ-2024

TZ-2024


Zoom Track Spot

Zoom track spotlight with a CREE COB source and 10°-60° focusable beam in an aluminium alloy body. Available in dimmable and tunable options.

POWER	BEAM
30W	10°-60°
CRI	
>80Ra	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 5000K · 6500K

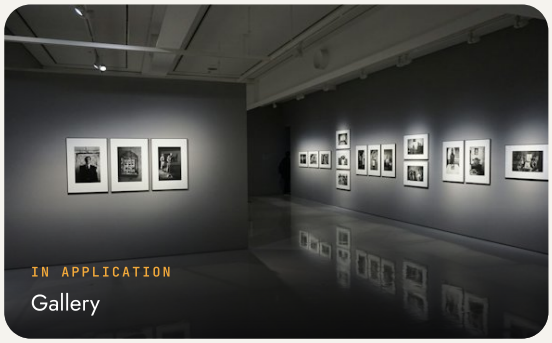

MAKE	ALOXE
MODEL	TZ-2024
SERIES	Track Spot
LED MAKE	COB CREE
LUMINOUS FLUX	4200-4400lm
INPUT	AC 220-240V
FINISH	Black
DIMENSIONS	Ø90 × 165 mm
MOUNTING	Track mounted (2-wire adaptor)
CONTROL	Dimmable

Track Spot



TZ-2023

02

TZ-2023


Zoom Track Spot

Zoom track spotlight with a CREE COB source and 10°-60° focusable beam in an aluminium alloy body. Available in dimmable and tunable options.

POWER	BEAM
20W	10°-60°
CRI	
>80Ra	


COLOUR TEMPERATURE

2700K · 3000K · 4000K · 5000K · 6500K

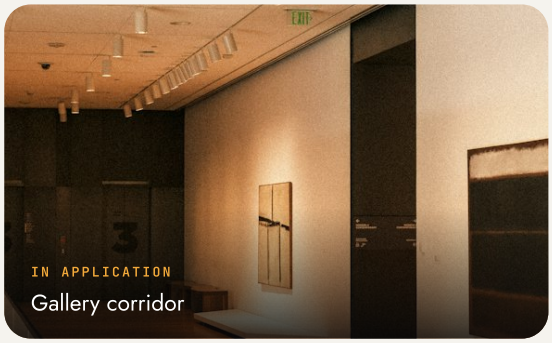

IN APPLICATION
Gallery corridor

MAKE	ALOXE
MODEL	TZ-2023
SERIES	Track Spot
LED MAKE	COB CREE
LUMINOUS FLUX	4200-4400lm
INPUT	AC 220-240V
FINISH	Black
DIMENSIONS	Ø75 × 165 mm
MOUNTING	Track mounted (2-wire adaptor)
CONTROL	Dimmable

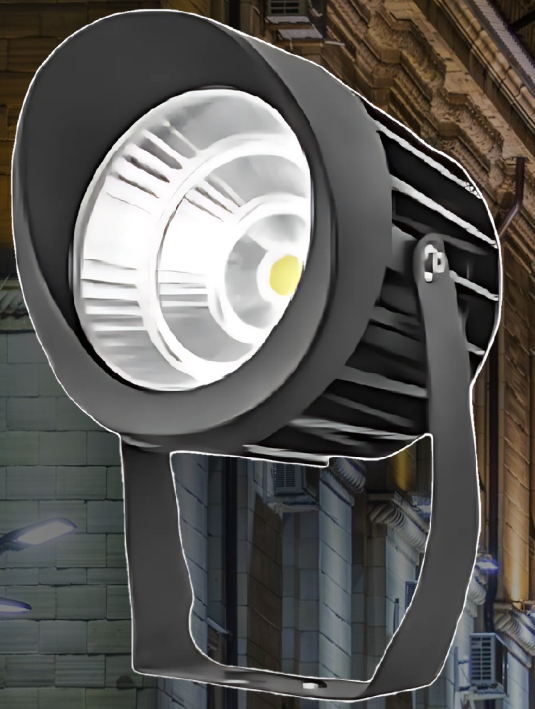

N° 03

Outdoor Projectors

Architectural projectors, flood lights, beam lights and garden spikes for facades and landscapes.

WALL WASHER · PROJECTOR · FLOOD LIGHT · BEAM LIGHT · FOUNTAIN LIGHT · SPIKE LIGHT

46 LUMINAIRES · PAGES 88–133

Wall Washer



TURBO-72216

Pro Series Heavy-Duty Outdoor LED Wall Washer Flood Light

Heavy-duty die-cast aluminium wall washer with precision lenses, DMX512 compatibility, optional flicker-free driver and single-colour CCT selection. Operating temperature -20 to +40 °C.

POWER	216W
BEAM	5°–45°
PROTECTION	IP65
CRI	>80

COLOUR TEMPERATURE

2700K · 3000K · 3500K · 4000K · 5000K · 6000K · RGBW

APPLICATIONS

Outdoor building wall washing



MAKE	ALOXE
MODEL	TURBO-72216
SERIES	Wall Washer
LED MAKE	3535 Cree
INPUT	24V DC, PF 0.90
FINISH	Dark Grey
DIMENSIONS	525 × 215 × 205 mm (lamp height 195 mm, depth 60 mm)
MOUNTING	Surface mounted on adjustable bracket
CONTROL	Dimmable

Projector



SP10L

SP10L

SP10L Outdoor Spot Light

Compact narrow-beam spotlight in a weatherproof high-grade aluminium body with a 3° lens for precise accent lighting.

POWER	BEAM
6W	3°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K



MAKE	ALOXE
MODEL	SP10L
SERIES	Projector
LED MAKE	COB Cree
INPUT	230V AC
DIMENSIONS	100 × 45 mm
MOUNTING	Bracket mounted

Flood Light



Outdoor Projectors

Round Outdoor Flood Light

Round flood light with a high-grade die-cast aluminium heat sink, dust-tight and water-jet resistant, with beam angles from 5° to 90° and a full range of light colours.

POWER	BEAM
12W–48W	5°-90° (adjustable)
PROTECTION	
IP65	

COLOUR TEMPERATURE

Full range available

APPLICATIONS

Outdoor security and architectural lighting



MAKE	ALOXE
SERIES	Flood Light
INPUT	230V AC
DIMENSIONS	12W: 130 × 90 × 160 mm; 24W: 180 × 100 x 215 mm; 36W: 230 × 100 × 280 mm; 48W: 290 × 110 × 350 mm
MOUNTING	Adjustable bracket

Projector



AXOD27SQ

Outdoor Light

Square aluminium projector with nine lensed LEDs, available in narrow to wide beam options for facade and accent lighting.

POWER	BEAM
27W	5°–45°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K 4000K 6000K



MAKE	ALOXE
MODEL	AXOD27SQ
SERIES	Projector
INPUT	220V AC
DIMENSIONS	170 (W) x 170 (H) x 135 (D) mm / 215 mm H with bracket
MOUNTING	Adjustable bracket

Wall Washer



FD 200

FD 200

FD 200 Linear Wall Washer

High-output linear aluminium wall washer with Cree LEDs, available with a built-in driver at 230V AC or as a 24V DC version, in multiple beam angles.

POWER	BEAM
150W / 200W	3°–45°
PROTECTION	**CRI**
IP65	80

COLOUR TEMPERATURE

2700K · 3000K · 3500K · 4000K · 5000K · 6000K



MAKE	ALOXE
MODEL	FD 200
SERIES	Wall Washer
LED MAKE	Cree
INPUT	24V DC / 230V AC (150W with built-in driver, or 200W at 24V)
DIMENSIONS	Lamp 820 × 140 × 110 mm H; stand 355 x 75 × 110 mm H
MOUNTING	Stand / bracket mounted

Wall Washer



FD 200

FD 200


FD 200 Linear Wall Washer

Linear aluminium wall washer with 54 × 3.5W Cree LEDs, offered in 24V or 230V AC input with multiple beam angles.

POWER	BEAM
189W	3°–45°
PROTECTION	**CRI**
IP65	80

COLOUR TEMPERATURE

2700K · 3000K · 3500K · 4000K · 5000K · 6000K

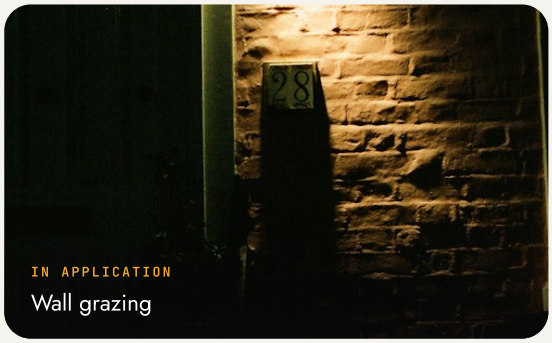

MAKE	ALOXE
MODEL	FD 200
SERIES	Wall Washer
LED MAKE	Cree
INPUT	54 × 3.5W; 24V / 230V AC
DIMENSIONS	Lamp 820 × 140 × 110 mm H; stand 355 x 75 × 110 mm H
MOUNTING	Stand / bracket mounted

Beam Light



Outdoor Projectors

LED Beam Light

COB beam light with a reflector optic in a die-cast aluminium housing, available in white and RGB colours.

POWER	PROTECTION
10W / 20W / 30W	IP65

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · R · G · B



MAKE	ALOXE
SERIES	Beam Light
LED MAKE	COB
INPUT	220V AC
DIMENSIONS	30W: 150 × 170 × 230 mm; 20W: 110 x 130 × 170 mm; 10W: 90 × 110 × 140 mm (D x L x H)
MOUNTING	Adjustable bracket

Projector



AXOD27SQ

Outdoor Light

Square aluminium projector with nine lensed LEDs in narrow to wide beam options.

POWER	BEAM
27W	5°–45°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K 4000K 6000K



MAKE	ALOXE
MODEL	AXOD27SQ
SERIES	Projector
INPUT	220V AC
DIMENSIONS	170 × 170 × 135 mm D x 215 mm H
MOUNTING	Adjustable bracket

Projector




Outdoor Projectors

Square Outdoor Projector

Square projector range in a durable aluminium alloy housing with enamel finish and tempered glass lens, from 5W to 64W.

POWER	BEAM
5W–64W	3°–45°
PROTECTION	
IP65	

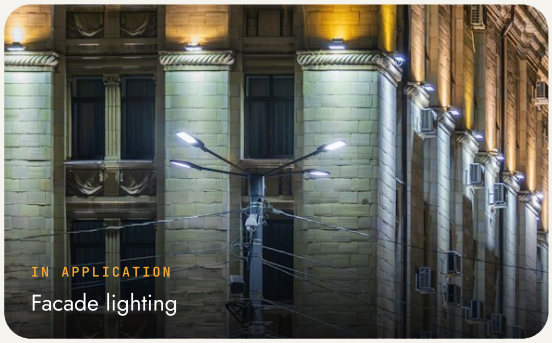

MAKE	ALOXE
SERIES	Projector
INPUT	240V AC / 24V DC
DIMENSIONS	5-10W: 90 × 90 × 110 mm H; 12-16W: 120 x 120 × 160 mm H; 27-36W: 145 × 145 x 180 mm H; 48-64W: 200 × 200 × 210 mm H
MOUNTING	Adjustable bracket

Wall Washer



SQ20

SQ20

Wall Washer

Compact square wall washer in die-cast aluminium with four lensed LEDs, available from 2700K to 6000K and RGB.


POWER	BEAM
12W	3°–45°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K-6000K · R · G · B

APPLICATIONS

Facade and building exterior lighting

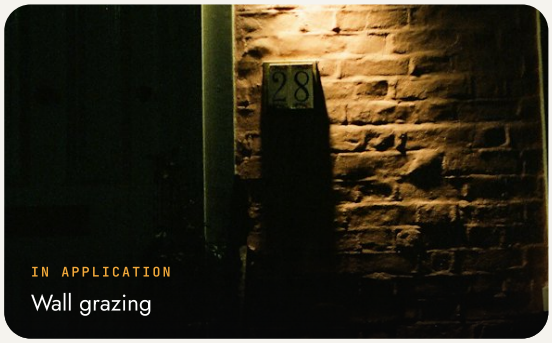

IN APPLICATION
Wall grazing

MAKE	ALOXE
MODEL	SQ20
SERIES	Wall Washer
INPUT	230V AC
DIMENSIONS	120 × 120 × 160 mm H
MOUNTING	Adjustable bracket

Projector



Outdoor Projectors

Round Outdoor Projector

Cylindrical projector range with glare shield in a durable aluminium alloy housing with enamel finish and tempered glass.

POWER	BEAM
5W–64W	3°–45°
PROTECTION	
IP65	



MAKE	ALOXE
SERIES	Projector
INPUT	230V AC / 24V DC
DIMENSIONS	5-10W: Ø89, W95, H105 mm; 12-16W: Ø130, W72, H172 mm; 27-36W: Ø175, W97, H231 mm; 48-64W: Ø220, W107, H275 mm
MOUNTING	Surface base with swivel knuckle

Beam Light



Outdoor Projectors


LED Beam Light

COB beam light with reflector optic in a die-cast aluminium housing, available in white and RGB colours.

POWER	PROTECTION
10W / 20W / 30W	IP65

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · R · G · B

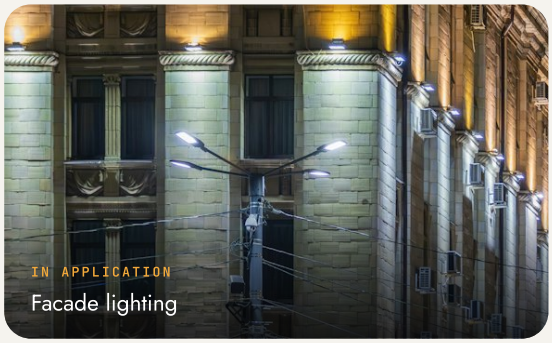

MAKE	ALOXE
SERIES	Beam Light
LED MAKE	COB
INPUT	220V AC
MOUNTING	Adjustable bracket

Beam Light



Outdoor Projectors

LED Beam Light 36W

Narrow 5° square beam light with 3535 LEDs in a textured die-cast aluminium housing.

POWER	BEAM
36W	5°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · R · G · B



MAKE	ALOXE
SERIES	Beam Light
LED MAKE	3535
INPUT	220V AC
DIMENSIONS	150 × 130 × 155 mm D
MOUNTING	Adjustable bracket

Beam Light



Outdoor Projectors


LED Beam Light 20W

Rectangular beam light with eight lensed 3535 LEDs in a textured die-cast aluminium housing.

POWER	PROTECTION
20W	IP65

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · R · G · B

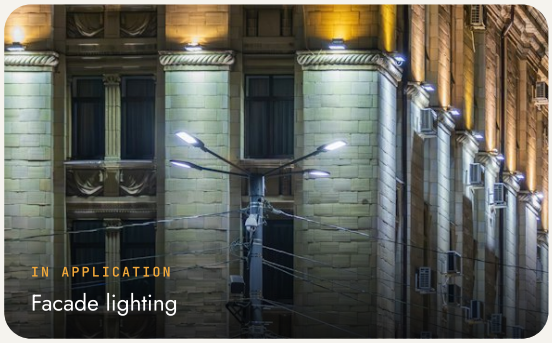

MAKE	ALOXE
SERIES	Beam Light
LED MAKE	3535
INPUT	220V AC
DIMENSIONS	150 × 90 × 125 mm D
MOUNTING	Adjustable bracket

Fountain Light



Outdoor Projectors

Fountain Light

Compact 304 stainless steel fountain light with three LEDs, available in white and RGB versions with IP65 or IP68 protection.

POWER	PROTECTION
3W / 9W	IP65 / IP68

COLOUR TEMPERATURE

3000K · 4000K · 6000K · R · G · B

APPLICATIONS

Fountains and water features



MAKE	ALOXE
SERIES	Fountain Light
INPUT	12V DC / 240V AC (9W for RGB)
DIMENSIONS	90 mm x 140 mm H
MOUNTING	Base mounted with adjustable bracket

Fountain Light



OD12SS

OD12SS


Stainless Steel Fountain Light

304 stainless steel 12W spotlight available with a built-in driver (IP65) or external driver for submersible IP68 use.

POWER	BEAM
12W	10°–60°
PROTECTION	
IP65 (built-in driver) / IP68 (external driver)	

APPLICATIONS

Fountains, pools and landscape

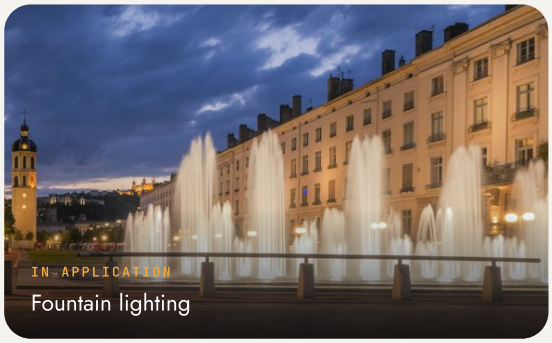

MAKE	ALOXE
MODEL	OD12SS
SERIES	Fountain Light
LED MAKE	Cree, JX
DIMENSIONS	Ø140 mm, depth 80 mm, height 180 mm, base 90 mm
MOUNTING	Base mounted with adjustable bracket

Spike Light



ODCP20

ODCP20


Outdoor Lights

COB garden spotlight with deep glare shield and faceted reflector in die-cast aluminium.

POWER	BEAM
20W	24°
PROTECTION	
IP65	

APPLICATIONS

Garden and landscape accent lighting

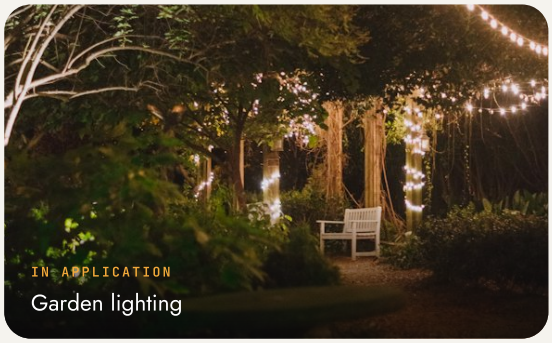

MAKE	ALOXE
MODEL	ODCP20
SERIES	Spike Light
LED MAKE	COB
INPUT	230V AC
DIMENSIONS	Ø145 × 320 mm H
MOUNTING	Surface base with swivel knuckle

Spike Light



ODCP12

ODCP12


Outdoor Lights

Compact COB garden spotlight with glare shield in a die-cast aluminium body.

POWER	BEAM
12W	24°
PROTECTION	
IP65	

APPLICATIONS

Garden and landscape accent lighting

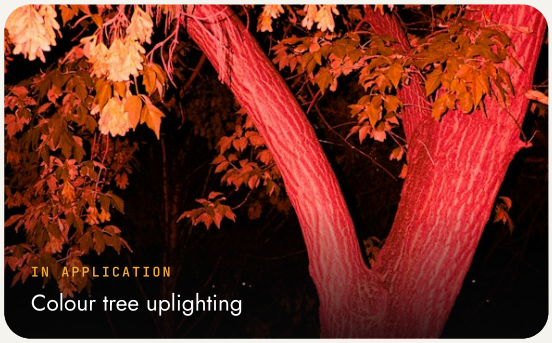

MAKE	ALOXE
MODEL	ODCP12
SERIES	Spike Light
LED MAKE	COB
INPUT	240V AC
DIMENSIONS	Ø85 × 240 mm H
MOUNTING	Surface base with swivel knuckle

Projector



Outdoor Projectors

Narrow Beam Pillar Highlighter

Range of narrow-beam projectors (10W, 27W, 36W, 10W and 20W) that cast a tight vertical beam to highlight pillars and columns.

POWER
10W–36W

APPLICATIONS

Pillar and column highlighting



MAKE	ALOXE
SERIES	Projector
MOUNTING	Bracket mounted

Projector



Outdoor Projectors

Outdoor Newdeco Lights

Anti-glare round projector range in die-cast aluminium with Cree LEDs, CRI 80-90 and Fulham or Osram drivers.

POWER 18W–65W	BEAM 10° / 30°
PROTECTION IP65	CRI 80



MAKE	ALOXE
SERIES	Projector
LED MAKE	Cree
INPUT	230V AC; Fulham / Osram driver
DIMENSIONS	18W: 150 × 180 mm H; 25W: 180 mm W; 45W: 230 × 290 mm H; 65W: 280 × 330 mm H
MOUNTING	Adjustable bracket

Spike Light



GL12C

GL12C

Garden Lights

Compact garden spotlight in die-cast aluminium with glass lens, glare shield and Cree LED, available in white and RGB.


POWER	BEAM
12W	36°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K-6000K · R · G · B

APPLICATIONS

Garden and landscape lighting

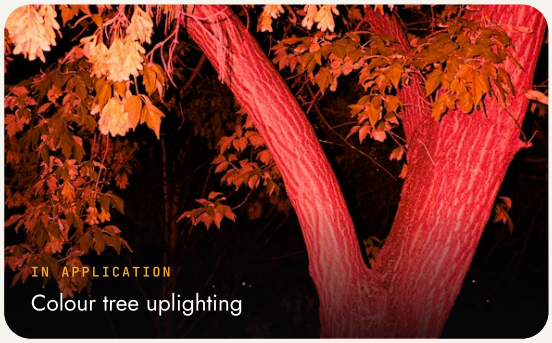

IN APPLICATION
Colour tree uplighting

MAKE	ALOXE
MODEL	GL12C
SERIES	Spike Light
LED MAKE	Cree
INPUT	230V AC
DIMENSIONS	Ø105 × 135 mm H
MOUNTING	Adjustable bracket

Projector



Outdoor Projectors

Outdoor Light

Round aluminium projector with twelve 1.5W Cree LEDs and anti-glare bezel.

POWER 18W	BEAM 10°–30°
PROTECTION IP65	



MAKE	ALOXE
SERIES	Projector
LED MAKE	Cree
INPUT	12 × 1.5W; 230V AC
MOUNTING	Adjustable bracket

Spike Light



Outdoor Projectors

20W COB Spike Light

Adjustable COB LED garden spike light with a die-cast aluminium body in graphite grey finish, rated IP65 for outdoor use.


POWER	PROTECTION
20W	IP65

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Gardens, landscapes, lawns and shrub accent lighting

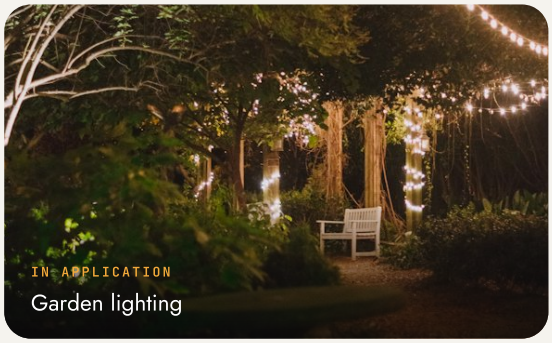

MAKE	ALOXE
SERIES	Spike Light
LED MAKE	COB LED
INPUT	220VAC
FINISH	Graphite Grey
DIMENSIONS	L125 x W80 x H250 mm
MOUNTING	Ground spike

Spike Light



Outdoor Projectors

3W COB Spike Light

Compact COB LED spike light with aluminium body in graphite grey, IP65 rated for outdoor garden accenting.


POWER	PROTECTION
3W	IP65

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Gardens, planters and landscape accent lighting

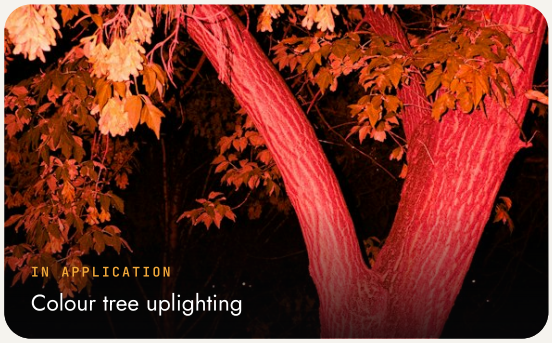

MAKE	ALOXE
SERIES	Spike Light
LED MAKE	COB LED
INPUT	220VAC
FINISH	Graphite Grey
DIMENSIONS	L65 x W45 x H210 mm
MOUNTING	Ground spike

Spike Light



Outdoor Projectors

7W & 12W COB Spike Light

Mid-size COB LED garden spike light with aluminium body in graphite grey, available in 7W and 12W, IP65 rated.

POWER	PROTECTION
7W / 12W	IP65

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Gardens, trees, facades and landscape lighting



MAKE	ALOXE
SERIES	Spike Light
LED MAKE	COB LED
INPUT	220VAC
FINISH	Graphite Grey
DIMENSIONS	L100 x W65 x H240 mm
MOUNTING	Ground spike

Spike Light



Outdoor Projectors


3W Outdoor Spike

Slim 3W COB outdoor spike light with finned heat-sink body and adjustable bracket for precise aiming.

POWER
3W

APPLICATIONS

Gardens, pathways and plant accent lighting

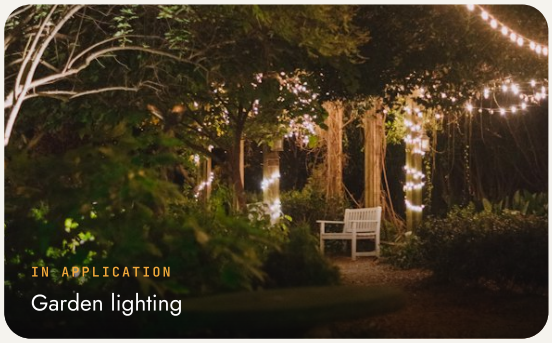

MAKE	ALOXE
SERIES	Spike Light
LED MAKE	COB LED
FINISH	Black
DIMENSIONS	Ø45 x L95 x H245 mm
MOUNTING	Ground spike

Projector



ODCAP

ODCAP

Outdoor COB Projector

Aluminium COB outdoor projector with glare-control cowl and adjustable bracket, offered in 10W, 20W and 30W with a 24° beam.

POWER	BEAM
10W / 20W / 30W	24°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K

APPLICATIONS

Facades, trees, landscapes and architectural accent lighting



MAKE	ALOXE
MODEL	ODCAP
SERIES	Projector
LED MAKE	COB LED
INPUT	240VAC
DIMENSIONS	10W: 135 × 90 x H90 mm; 20W: 180 × 115 x H140 mm; 30W: 210 × 150 x H160 mm
MOUNTING	Surface mounted on adjustable U-bracket

Projector



ODR10CH

ODR10CH

Outdoor Light

Cylindrical aluminium 10W outdoor projector with a 24° beam and adjustable mounting bracket, IP65 rated.

POWER	BEAM
10W	24°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Facades, columns, trees and landscape accents



MAKE	ALOXE
MODEL	ODR10CH
SERIES	Projector
LED MAKE	COB LED
INPUT	240VAC
FINISH	Black
DIMENSIONS	Ø65 x L112 x H170 mm
MOUNTING	Surface mounted on adjustable bracket

Projector



ODR5CH

ODR5CH

Outdoor Light

Compact finned aluminium 5W outdoor projector with a 24° beam and adjustable bracket, IP65 rated.


POWER	BEAM
5W	24°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Facade grazing, signage, plants and landscape accents

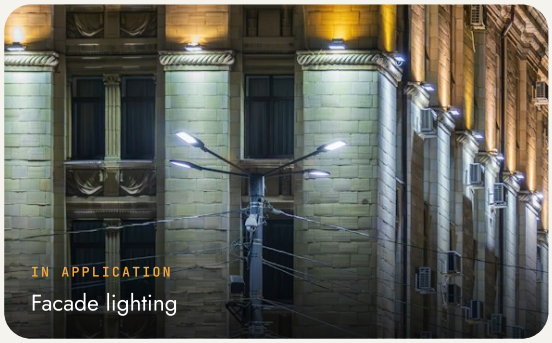

MAKE	ALOXE
MODEL	ODR5CH
SERIES	Projector
INPUT	240VAC
FINISH	Black
DIMENSIONS	Ø40 x L78 x H120 mm
MOUNTING	Surface mounted on adjustable bracket

Projector



OD10CH

OD10CH

Outdoor Light

Aluminium 10W COB outdoor projector with anti-glare cowl and 36° beam, available in a wide range of colour temperatures.

POWER	BEAM
10W	36°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2200K · 2700K · 3000K · 4000K · 6000K

APPLICATIONS

Trees, gardens, facades and landscape lighting



MAKE	ALOXE
MODEL	OD10CH
SERIES	Projector
LED MAKE	COB LED
INPUT	240VAC
FINISH	Dark Grey
DIMENSIONS	135 × 90 x H90 mm
MOUNTING	Surface mounted on adjustable U-bracket

Projector



OD20CH

OD20CH

Outdoor Light

Aluminium 20W COB outdoor projector with anti-glare cowl and 36° beam, IP65 rated.

POWER	BEAM
20W	36°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K

APPLICATIONS

Trees, gardens, facades and landscape lighting



MAKE	ALOXE
MODEL	OD20CH
SERIES	Projector
LED MAKE	COB LED
INPUT	240VAC
FINISH	Dark Grey
DIMENSIONS	180 × 115 x H140 mm
MOUNTING	Surface mounted on adjustable U-bracket

Projector



OD30CH

OD30CH

Outdoor Light

High-output 30W aluminium COB outdoor projector with anti-glare cowl and 36° beam, IP65 rated.

POWER	BEAM
30W	36°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K

APPLICATIONS

Large trees, facades and architectural landscape lighting



MAKE	ALOXE
MODEL	OD30CH
SERIES	Projector
LED MAKE	COB LED
INPUT	240VAC
FINISH	Dark Grey
DIMENSIONS	210 × 150 x H160 mm
MOUNTING	Surface mounted on adjustable U-bracket

Spike Light



Outdoor Projectors


Garden Light

IP65 garden spike light available in 3W, 5W and 12W, with an optional lens version for focused beam control.

POWER	PROTECTION
3W / 5W / 12W	IP65

APPLICATIONS

Gardens, lawns and landscape accent lighting

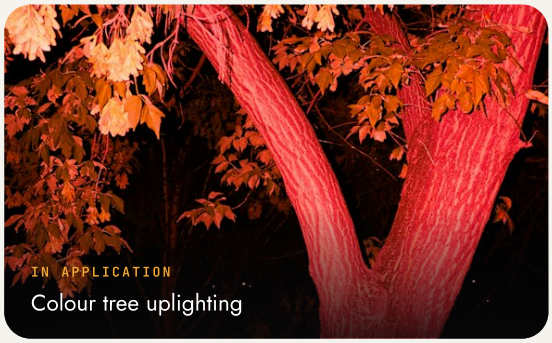

MAKE	ALOXE
SERIES	Spike Light
LED MAKE	COB LED
FINISH	Grey / Black
MOUNTING	Ground spike

Projector



AX-Deco

AX-Deco

Outdoor Light

Decorative drum-style COB outdoor projector on a curved arm and round base, available in 10W, 20W and 30W with white and RGB colour options.

POWER	BEAM
10W / 20W / 30W	30°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · Red · Green · Blue

APPLICATIONS

Facades, gardens, walls and architectural accent lighting



MAKE	ALOXE
MODEL	AX-Deco
SERIES	Projector
LED MAKE	COB LED
INPUT	220VAC
FINISH	Dark Grey
DIMENSIONS	30W: Ø125 x H190 mm, base 95 mm; 20W: Ø100 x H150 mm, base 85 mm; 10W: Ø80 x H115 mm, base 65 mm
MOUNTING	Surface mounted on round base

Flood Light



AXOD27SQ

Outdoor Light

Square aluminium 9-LED outdoor projector with selectable 5°, 20° or 45° optics, IP65 rated.

POWER	BEAM
27W	5°–45°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K · 4000K · 6000K

APPLICATIONS

Building facades, columns and architectural flood lighting



MAKE	ALOXE
MODEL	AXOD27SQ
SERIES	Flood Light
INPUT	220V AC
FINISH	Grey
MOUNTING	Surface mounted on adjustable bracket

Projector



AXOD10i

AXOD10i

Outdoor Light

Aluminium 12W outdoor projector with angled glare shield and 24° beam, available in all light colours.

POWER	BEAM
12W	24°
PROTECTION	
IP65	

COLOUR TEMPERATURE

All colours

APPLICATIONS

Facades, trees and landscape accent lighting



MAKE	ALOXE
MODEL	AXOD10i
SERIES	Projector
INPUT	220VAC
FINISH	Grey
MOUNTING	Surface mounted on adjustable bracket

Projector



AXOD71

AXOD71

Outdoor Light

Compact 7-LED aluminium outdoor spotlight with 30° beam and adjustable bracket, available in all light colours.


POWER	BEAM
7W	30°
PROTECTION	
IP65	

COLOUR TEMPERATURE

All colours

APPLICATIONS

Gardens, facades and landscape accents

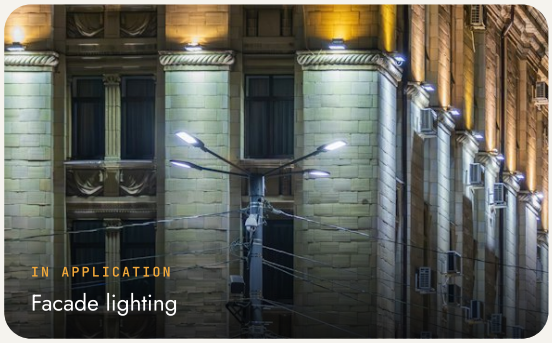

MAKE	ALOXE
MODEL	AXOD71
SERIES	Projector
LED MAKE	Prolux
INPUT	220VAC
FINISH	Black
MOUNTING	Surface mounted on adjustable bracket

Projector



AXOD3

AXOD3

Outdoor Light

Narrow 3° beam Cree LED projector that produces a sharp vertical light column, ideal for dramatic facade and pillar accents.

POWER	BEAM
27W	3°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · Red · Green · Blue

APPLICATIONS

Facades, pillars, towers and architectural beam effects



MAKE	ALOXE
MODEL	AXOD3
SERIES	Projector
LED MAKE	Cree
INPUT	220V AC
FINISH	Silver
DIMENSIONS	Ø150 mm
MOUNTING	Surface mounted on adjustable bracket

Flood Light



Outdoor Projectors

IP65 Outdoor Light

Round multi-LED Cree projector range from 150 mm to 280 mm diameter, offering 18W to 65W output for architectural flood lighting.

POWER	PROTECTION
18W–65W	IP65

APPLICATIONS

Building facades, monuments and large-area architectural lighting



MAKE	ALOXE
SERIES	Flood Light
LED MAKE	Cree
FINISH	Light Grey
DIMENSIONS	Ø150 mm (12 LED, 18W); Ø180 mm (18 LED, 24W); Ø230 mm (36 LED, 45W); Ø280 mm (54 LED, 65W)
MOUNTING	Surface mounted on adjustable bracket

Projector



AXOD-3243

Outdoor Light

Robust 30W aluminium outdoor projector with textured finish and adjustable bracket, IP65 rated.

POWER	PROTECTION
30W	IP65

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Facades, trees and architectural flood lighting



MAKE	ALOXE
MODEL	AXOD-3243
SERIES	Projector
INPUT	220V AC
FINISH	Silver Grey
DIMENSIONS	D150 x L160 x H230 mm
MOUNTING	Surface mounted on adjustable bracket

Projector



HND-FL-AP-10W

HND-FL-AP-10W

Apollo-1

Ultra-narrow 1° beam Cree projector in die-cast aluminium with tempered glass and overheating protection, offering 180° tilt and a lifespan above 50,000 hours.


POWER	BEAM
10W	1°
PROTECTION	
IP66	

COLOUR TEMPERATURE

2700-6500K · R/G/B

APPLICATIONS

Long-throw architectural beams, towers, monuments and facades

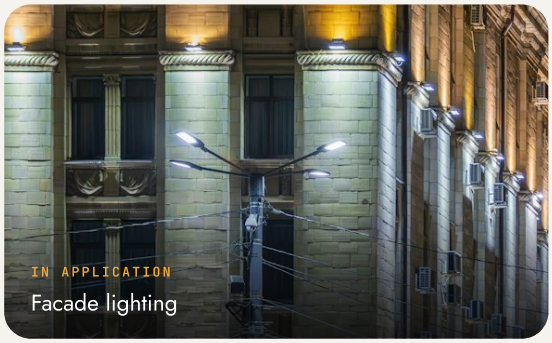

MAKE	ALOXE
MODEL	HND-FL-AP-10W
SERIES	Projector
LED MAKE	Cree XML
INPUT	AC100-250V 50-60Hz; DC24V
FINISH	Dark Grey
DIMENSIONS	85 × 85 × 120 mm
MOUNTING	Surface mounted on adjustable bracket (180°)

Flood Light



AX-SQ48

AX-SQ48

Square Projector

Square 16 × 3W Cree LED projector with narrow 5° optics and aluminium housing, delivering high-efficiency 100 lm/W output with PF above 0.95.

POWER	BEAM
48W	5°
PROTECTION	**CRI**
IP65	>80

COLOUR TEMPERATURE

3000K

APPLICATIONS

Building facades, columns and long-throw architectural lighting



IN APPLICATION
Building floodlighting

MAKE	ALOXE
MODEL	AX-SQ48
SERIES	Flood Light
LED MAKE	Cree
LUMINOUS FLUX	100 lm/W
INPUT	AC 85-265V 50-60Hz
FINISH	Grey
DIMENSIONS	200 × 200 × 260 mm
MOUNTING	Surface mounted on adjustable bracket

Flood Light



BB-3134

Project Lamp

Square 24 × 3W Cree LED project lamp in aluminium housing with a choice of 5° to 60° optics and white or coloured outputs; backed by a 1-year warranty.

POWER	BEAM
72W	5°–60°
PROTECTION	**CRI**
IP65	≥80

COLOUR TEMPERATURE

White · Warm · Yellow · Red · Green · Blue · RGB

APPLICATIONS

Building facades, bridges, monuments and architectural flood lighting



MAKE	ALOXE
MODEL	BB-3134
SERIES	Flood Light
LED MAKE	Cree
LUMINOUS FLUX	100 lm/W
INPUT	AC85-265V 50-60Hz
FINISH	Grey
DIMENSIONS	245 × 245 x H360 mm
MOUNTING	Surface mounted on adjustable bracket

Flood Light



BB-3132

Project Lamp

Square 16 × 3W Cree LED project lamp in aluminium housing with 5° to 60° optics and white or coloured outputs; backed by a 1-year warranty.

POWER	BEAM
48W	5°–60°
PROTECTION	**CRI**
IP65	≥80

COLOUR TEMPERATURE

White · Warm · Yellow · Red · Green · Blue · RGB

APPLICATIONS

Building facades, columns and architectural flood lighting



MAKE	ALOXE
MODEL	BB-3132
SERIES	Flood Light
LED MAKE	Cree
LUMINOUS FLUX	100 lm/W
INPUT	AC85-265V 50-60Hz
FINISH	Grey
DIMENSIONS	200 × 200 x H260 mm
MOUNTING	Surface mounted on adjustable bracket

Projector



BB-3068

BB-3068

Project Lamp

Cylindrical 10W Cree LED spot projector with a narrow 8° lens and finned aluminium body; backed by a 1-year warranty.


POWER 10W	BEAM 8°
PROTECTION IP65	CRI ≥80

COLOUR TEMPERATURE

Warm · White · Red · Green · Blue · RGB

APPLICATIONS

Facade accents, pillars, trees and sculptures

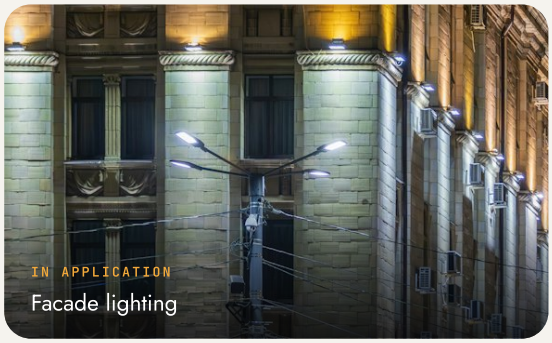

MAKE	ALOXE
MODEL	BB-3068
SERIES	Projector
LED MAKE	Cree
LUMINOUS FLUX	100 lm/W
INPUT	AC85-265V 50-60Hz
FINISH	Grey
DIMENSIONS	Ø80 x H150 mm
MOUNTING	Surface mounted on adjustable bracket

Projector



Outdoor Projectors

6W IP65 Outdoor Light

Compact 6-LED IP65 outdoor projector with clear protective cover and a graduated tilt bracket for precise aiming.


POWER	PROTECTION
6W	IP65

APPLICATIONS

Facades, signage and architectural accent lighting



MAKE	ALOXE
SERIES	Projector
FINISH	Light Grey
MOUNTING	Surface mounted on adjustable bracket

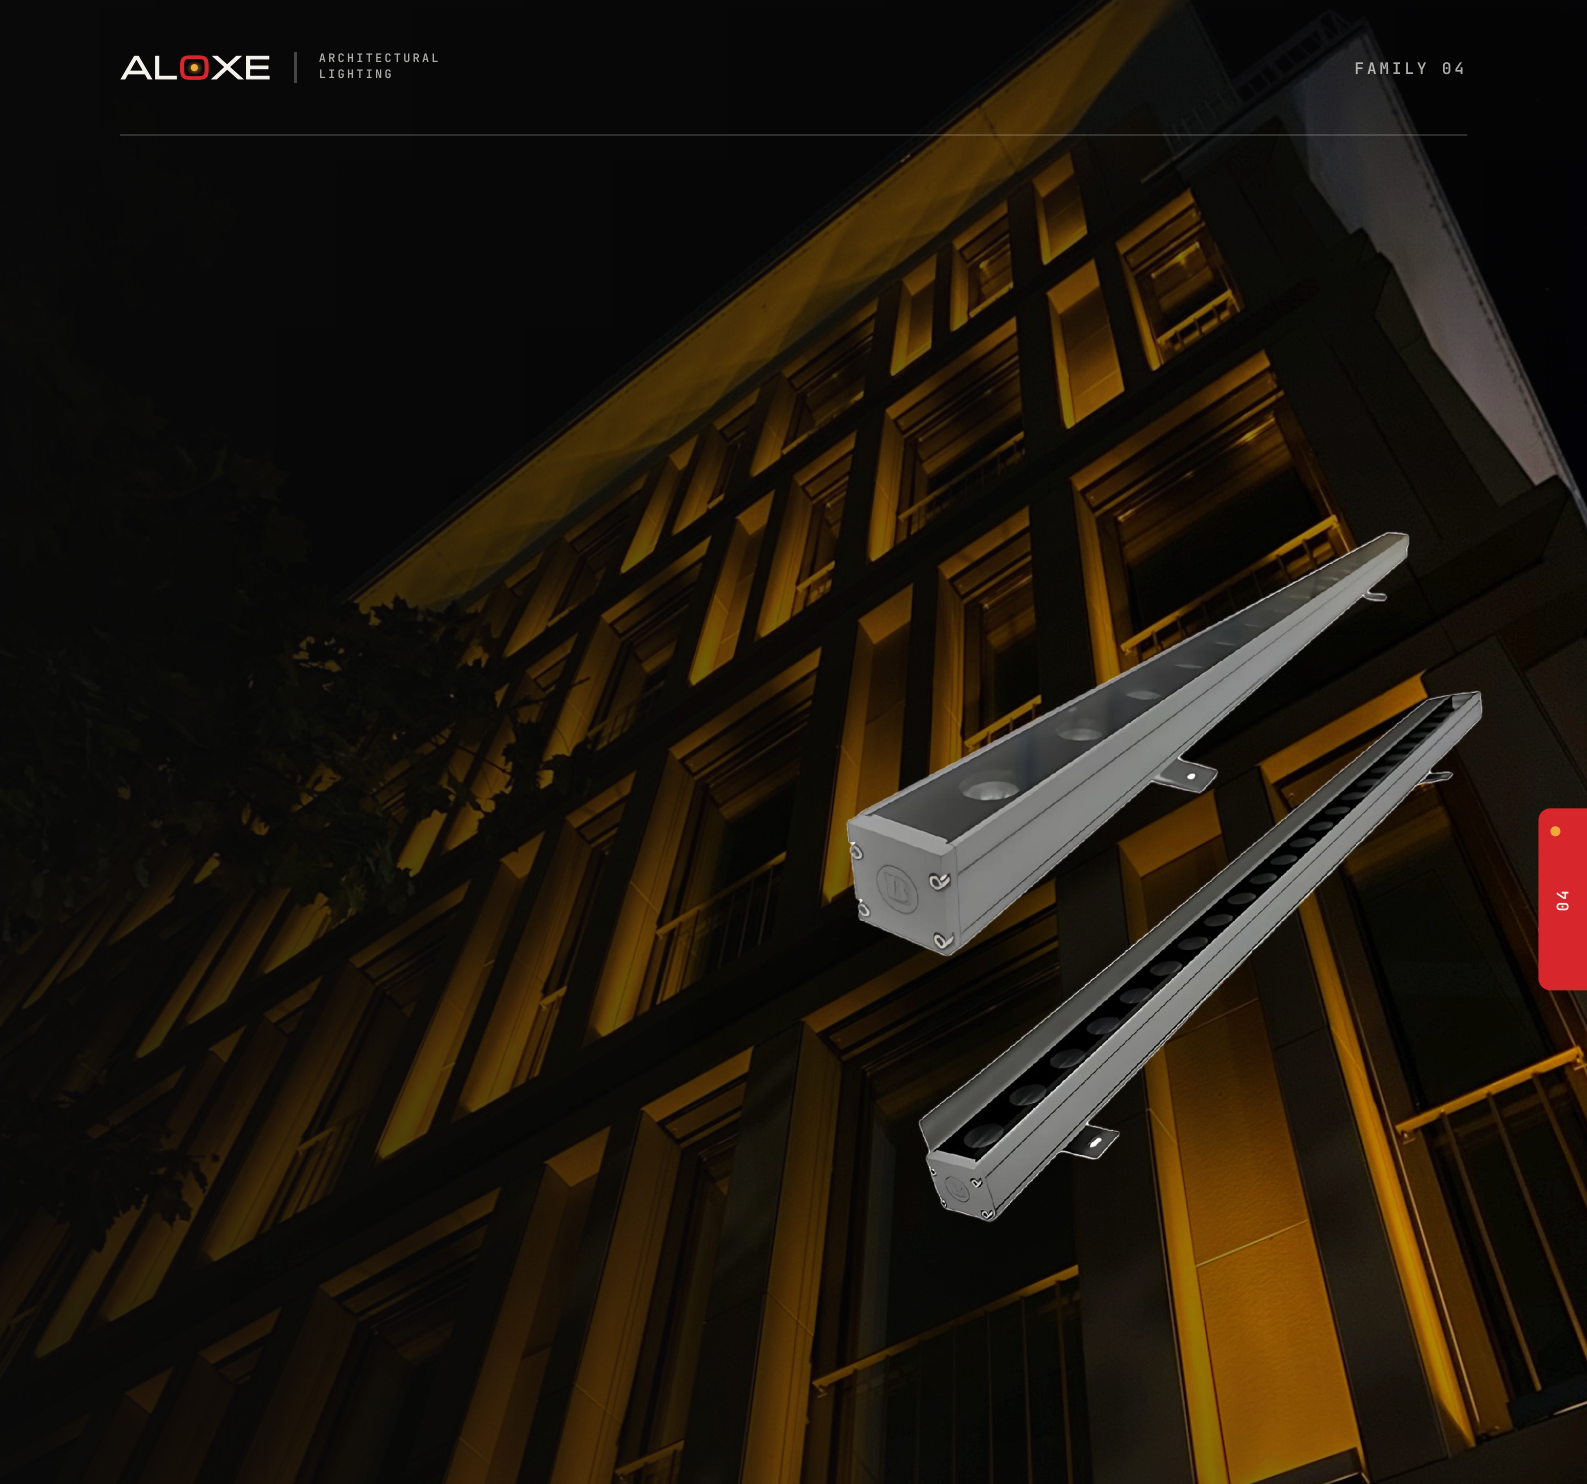

N° 04

Wall Washers

Linear, inground and compact washers that graze facades with even, controlled light.

INGROUND LINEAR · LINEAR WALL LAMP · LINEAR WALL WASHER · COMPACT WALL WASHER

20 LUMINAIRES · PAGES 135-154

Inground Linear



CW 901

CW 901

Inground Linear Recessed Wall Washer

Stainless steel and aluminium inground linear wall washer offered in five lengths with a wide choice of optics. Available in RGB, RGBW and tunable CCT colour options.

POWER	BEAM
50W–6W	5°–Asymmetrical
PROTECTION	
IP66	

COLOUR TEMPERATURE

2700K · 3000K · 3500K · 4000K · 5000K · 6000K


APPLICATIONS

Facade grazing, landscape and architectural wall washing



MAKE	ALOXE
MODEL	CW 901
SERIES	Inground Linear
INPUT	230VAC, 24VDC
FINISH	Stainless Steel
DIMENSIONS	1200×90×75mm (50W); 1000×90×75mm (36W); 500×90×75mm (18W); 300×90×75mm (9W); 200×90×55mm (6W)
CUT-OUT	15mm less than the outer size
MOUNTING	Inground recessed

Linear Wall Lamp

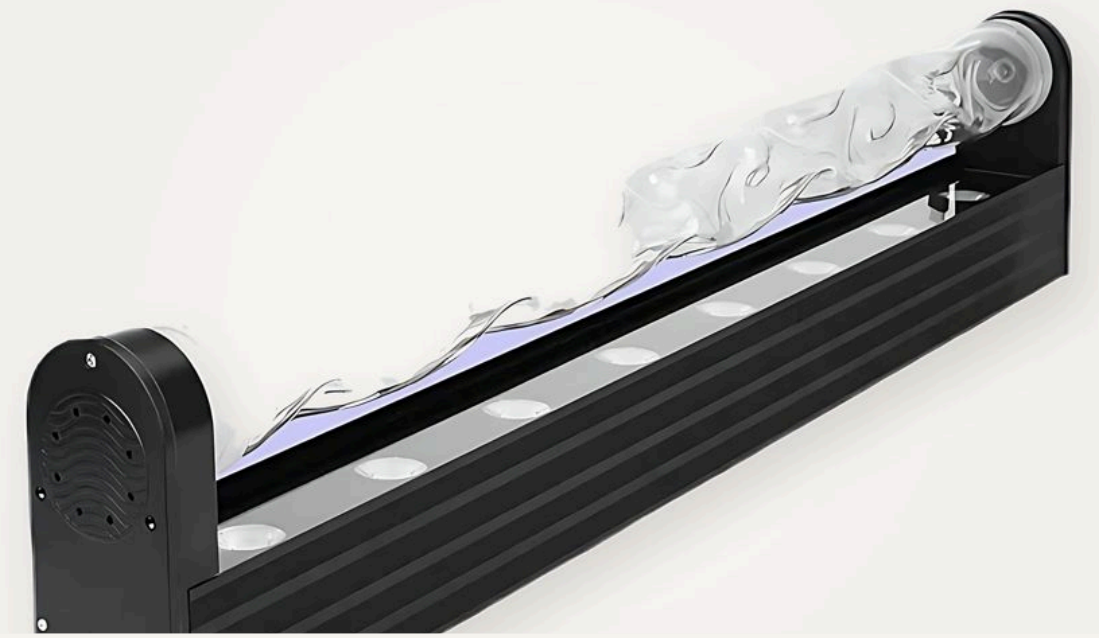

Wall Washers

Wave Light

Acrylic and aluminium ripple-effect LED lamp that projects moving water-wave patterns in RGBW. Includes remote control with preset modes such as Romantic Atmosphere, Crystal White, Blue Ocean, Green Aurora Borealis and Disco Effect.


POWER
48W

COLOUR TEMPERATURE

RGBW

APPLICATIONS

Indoor ambient and feature-wall lighting

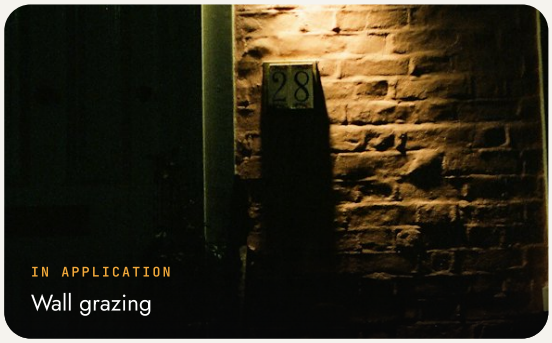

MAKE	ALOXE
SERIES	Linear Wall Lamp
LED MAKE	LED
INPUT	240VAC
FINISH	Black
DIMENSIONS	1000mm
MOUNTING	Surface / freestanding
CONTROL	Dimmable

Linear Wall Lamp



WL103

WL103


Modern Waterproof Outdoor Wall Lamp LED

Slim black aluminium wall lamp with acrylic rectangular shade that casts soft, bright light up, down and to the sides. Illuminates porches and entryways without spilling light towards neighbours; 1-year warranty.

BEAM	PROTECTION
360°	IP65

APPLICATIONS

Outdoor walls, porches, entryways

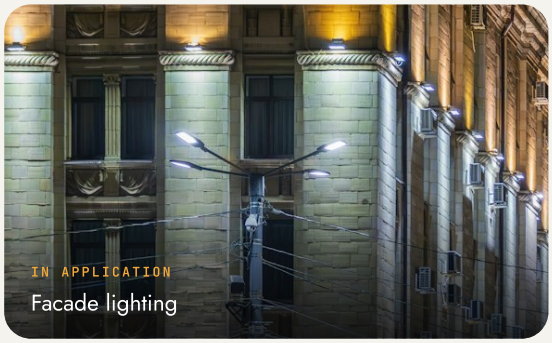

MAKE	ALOXE
MODEL	WL103
SERIES	Linear Wall Lamp
LED MAKE	LED
INPUT	AC 85-265V
FINISH	Black
DIMENSIONS	1000×80×45H mm; 1000×50×45H mm; sizes 1000mm & 500mm
MOUNTING	Wall mounted

Linear Wall Washer



Wall Washers

Wall Washer

Aluminium and tempered-glass linear wall washer with 36 Philips 1W LEDs and PC reflector. Rated 50,000 hours, Class III, operating from -20 to 40°C with on/off control.

POWER	BEAM
36W	30°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Facade and wall washing



MAKE	ALOXE
SERIES	Linear Wall Washer
LED MAKE	Philips (36pcs x 1W)
INPUT	DC24V
FINISH	Gray
DIMENSIONS	W40 x H36 x L1000mm
MOUNTING	Bracket mounted

Linear Wall Washer



Wall Washers

Wall Washer

Slim aluminium linear wall washer with 48 Philips 0.25W LEDs and an asymmetric 25×60° beam. Rated 50,000 hours, Class III, on/off control.


POWER	BEAM
12W	25x60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Facade and wall washing

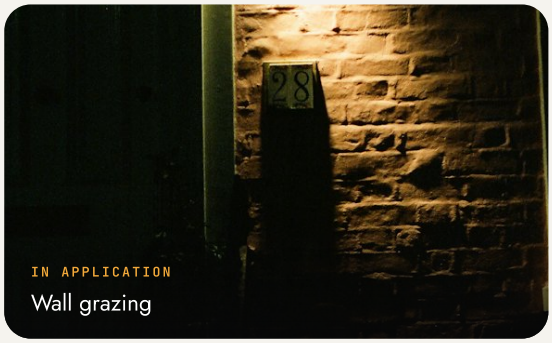

MAKE	ALOXE
SERIES	Linear Wall Washer
LED MAKE	Philips (48pcs x 0.25W)
INPUT	DC24V
FINISH	Gray
DIMENSIONS	W22 x H18 x L990mm
MOUNTING	Bracket mounted

Linear Wall Washer



WW001

WW001

Wall Washer

Anodized aluminium and tempered-glass linear wall washer with CREE LEDs, high CRI above 90 and IP67 protection. Dimmable, customizable, with a 1-year warranty.


POWER	PROTECTION
30W	IP67
CRI	
>90	

COLOUR TEMPERATURE

2700K-6000K · RGBW · CCT

APPLICATIONS

Building facades, gardens, bridges, hotels, advertising signs

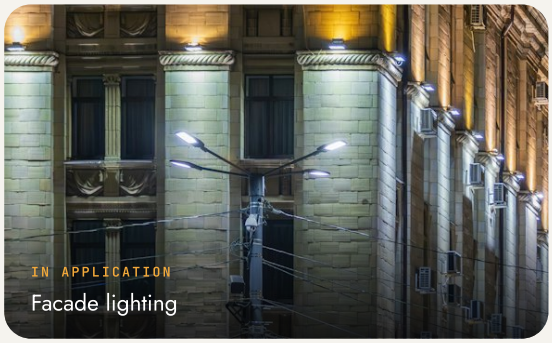

MAKE	ALOXE
MODEL	WW001
SERIES	Linear Wall Washer
LED MAKE	CREE
LUMINOUS FLUX	130 lm/W
INPUT	DC24V
FINISH	Gray
DIMENSIONS	L1000 x W45 x H25mm; stand height 40mm
MOUNTING	Wall and floor mounted
CONTROL	Dimmable

Linear Wall Washer



Wall Washers

Wall Washer

36W linear wall washer with 30° lenses and warm 3000K output on a 24VDC supply.

POWER	BEAM
36W	30°

COLOUR TEMPERATURE

3000K

APPLICATIONS

Facade and wall washing



MAKE	ALOXE
SERIES	Linear Wall Washer
INPUT	24VDC
FINISH	Gray
DIMENSIONS	L1000 x W40 x H36mm
MOUNTING	Bracket mounted

Linear Wall Washer



Wall Washers

Wall Washer

Slim 12W linear wall washer with 60° lenses and warm 3000K output, IP65 rated for outdoor use.


POWER	BEAM
12W	60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Facade and wall washing

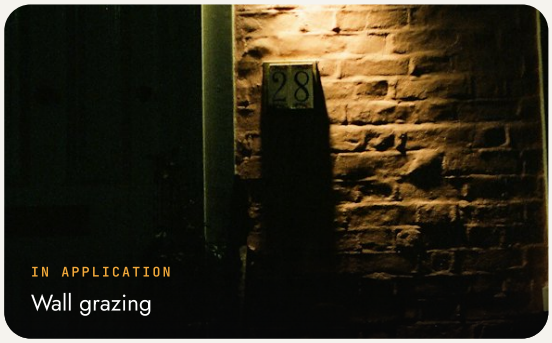

MAKE	ALOXE
SERIES	Linear Wall Washer
INPUT	24VDC
FINISH	Gray
DIMENSIONS	L1000 x W23 x H35mm
MOUNTING	Bracket mounted

Compact Wall Washer



Wall Washers


Wall Washer

Compact 12W wall washer with six 3535 LEDs and narrow 5° lenses for tight, long-throw grazing. IP65 rated.

POWER	BEAM
12W	5°
PROTECTION	
IP65	

APPLICATIONS


Columns, pillars and narrow facade grazing

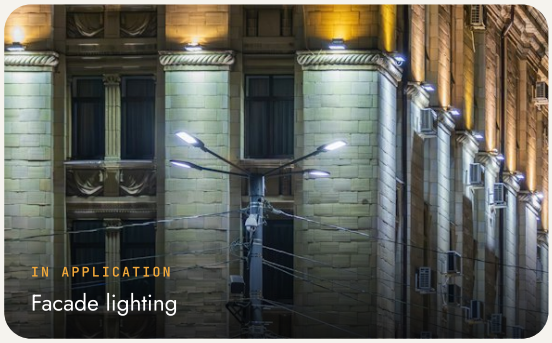

MAKE	ALOXE
SERIES	Compact Wall Washer
LED MAKE	3535 LED
INPUT	24VDC
FINISH	Black
DIMENSIONS	L180 x W40 x H25mm
MOUNTING	Bracket mounted

04

Inground Linear

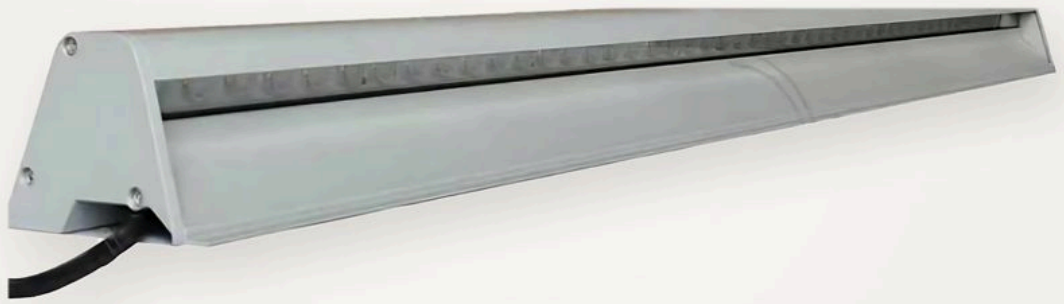

Wall Washers

Linear Floor Wall Washer

Low-profile aluminium linear luminaire with a walk-over wedge profile that washes pathways and walls with a continuous grazing light. IP65 rated, 24V DC.

POWER	PROTECTION
18W	IP65


APPLICATIONS

Pathways, walkways, garden edges



MAKE	ALOXE
SERIES	Inground Linear
INPUT	24V DC
FINISH	Gray
DIMENSIONS	1000 × 81 x H58mm
MOUNTING	Floor surface mounted

Linear Wall Lamp

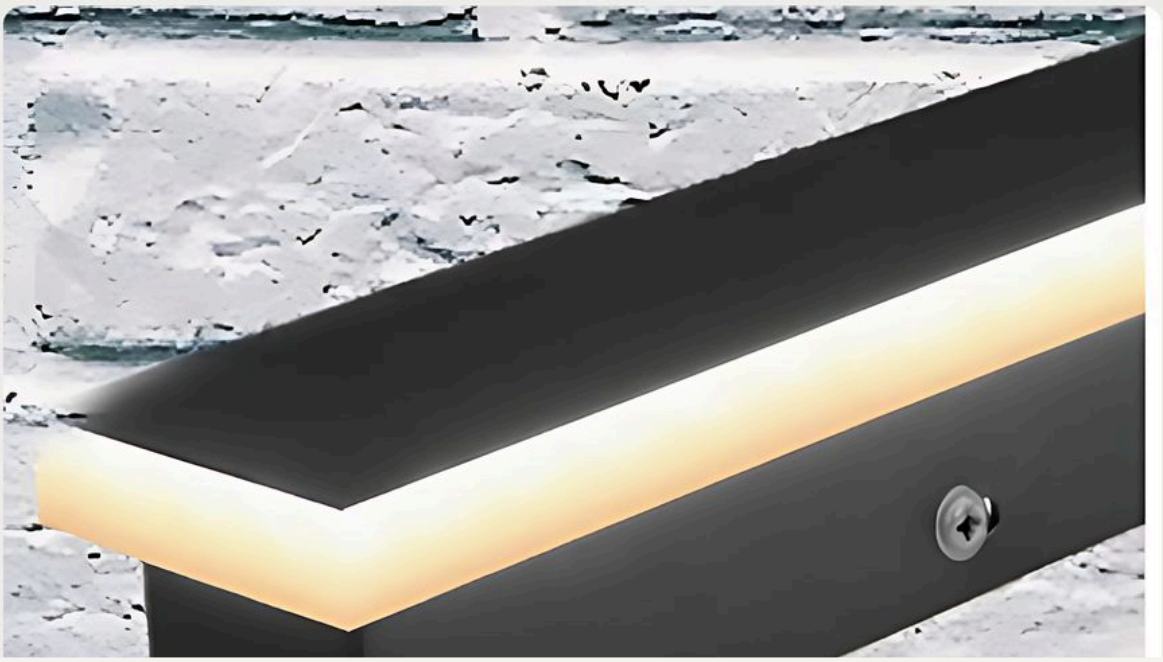


Wall Washers

LED Outdoor Wall Light

Slim black linear outdoor wall light producing a soft halo glow, offered in 500mm and 1000mm lengths. Uses a high-temperature-resistant, anti-aging acrylic lampshade.

APPLICATIONS

Outdoor walls and facades

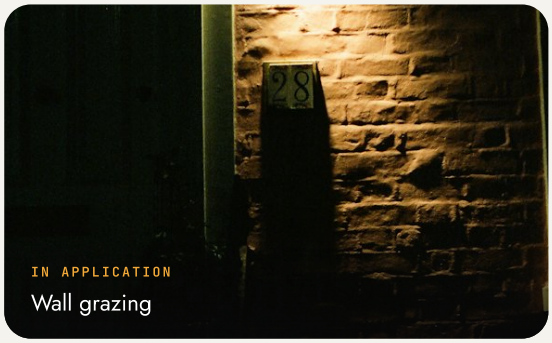

MAKE	ALOXE
SERIES	Linear Wall Lamp
FINISH	Black
DIMENSIONS	1000mm & 500mm lengths; widths 80mm / 50mm; depth 45mm
MOUNTING	Wall mounted

Linear Wall Washer



Wall Washers

Wall Washer

Anodized aluminium 1200mm wall washer with 36 × 1W CREE LEDs delivering 130 lm/W. Mains-powered with optics from 10° to 60°.


POWER	BEAM
36W	10°-60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K 3000K 4000K 6000K

APPLICATIONS

Facade and wall washing

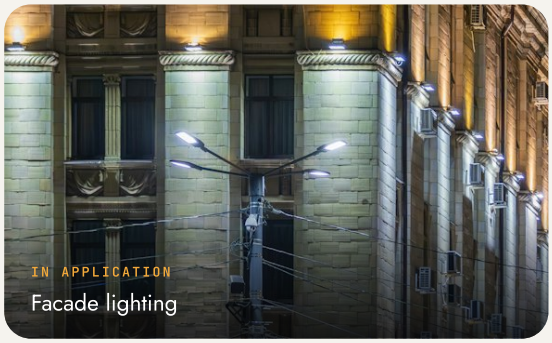

MAKE	ALOXE
SERIES	Linear Wall Washer
LED MAKE	CREE (36 × 1W)
LUMINOUS FLUX	130 lm/W
INPUT	240VAC
FINISH	Gray
DIMENSIONS	1200L x 45W x 50H mm
MOUNTING	Bracket mounted

Linear Wall Washer



WW2423

WW2423

Wall Washer

Aluminium linear wall washer with integrated glare shield and 24° optics. IP65 rated, 24V operation.

POWER	BEAM
24W	24°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Facade and wall washing



MAKE	ALOXE
MODEL	WW2423
SERIES	Linear Wall Washer
INPUT	24V
FINISH	Gray
DIMENSIONS	1000 × 45 x H95mm
MOUNTING	Bracket mounted

Inground Linear



Wall Washers

LED Recessed Linear Inground

Stainless steel and cast-body recessed inground linear light with power LEDs and lenses from 5° to 90°. Available as 24V dimming-compatible or with a built-in non-dimmable driver.


POWER	BEAM
24W / 12W	5°-90°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2200K-6500K

APPLICATIONS

Facade uplighting, landscape and pathways

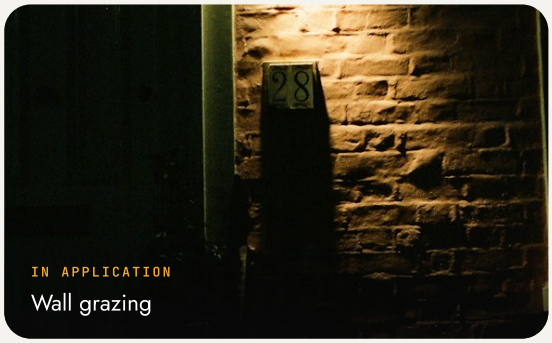

MAKE	ALOXE
SERIES	Inground Linear
LED MAKE	Power LED
LUMINOUS FLUX	120 lm/W
INPUT	24V
FINISH	Stainless Steel
DIMENSIONS	1000mm, 500mm
MOUNTING	Inground recessed
CONTROL	Dimmable

Compact Wall Washer



AA618

AA618

Wall Washer

Compact aluminium wall washer with six 3W CREE LEDs and a wide-range mains input. IP65 rated with a choice of narrow to medium optics.


POWER	BEAM
18W	5°–40°
PROTECTION	**CRI**
IP65	>80

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 5000K · 6000K

APPLICATIONS

Columns, facades and accent washing

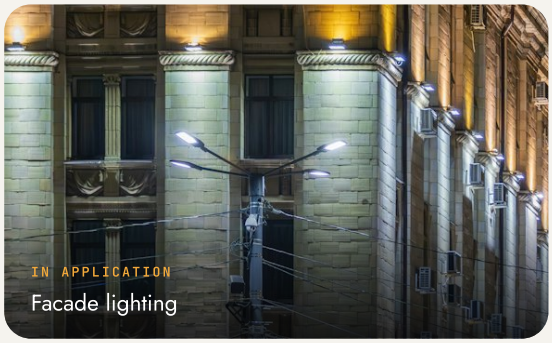

MAKE	ALOXE
MODEL	AA618
SERIES	Compact Wall Washer
LED MAKE	CREE (6 × 3W)
LUMINOUS FLUX	100 lm/W
INPUT	AC 85-265V 50-60Hz
FINISH	Gray
DIMENSIONS	L265 x W60 x H72mm
MOUNTING	Bracket mounted

Inground Linear



BB-1042

Underground Lamp

Compact rectangular inground lamp with OSRAM LEDs in an aluminium, stainless steel and plastic housing. Offered in white and colour options with PF ≥0.5 and a 1-year warranty.

POWER	BEAM
5W / 6W	10°–60°
PROTECTION	**CRI**
IP65	≥80

COLOUR TEMPERATURE

Warm · White · Red · Green · Blue · RGB · RGBW

APPLICATIONS

Landscape, steps and facade uplighting



MAKE	ALOXE
MODEL	BB-1042
SERIES	Inground Linear
LED MAKE	OSRAM
LUMINOUS FLUX	100 lm/W
INPUT	AC85-265V 50-60Hz
FINISH	Stainless Steel
DIMENSIONS	200 × 80 x H55mm
CUT-OUT	190 × 75 x H55mm
MOUNTING	Inground recessed

Linear Wall Washer



AA7224

AA7224

Wall Washer

High-output aluminium linear wall washer with 24 × 3W CREE LEDs and wide-range mains input. IP65 rated for exterior facades.


POWER	BEAM
72W	5°–45°
PROTECTION	**CRI**
IP65	>80

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K

APPLICATIONS

Building facades and large wall surfaces

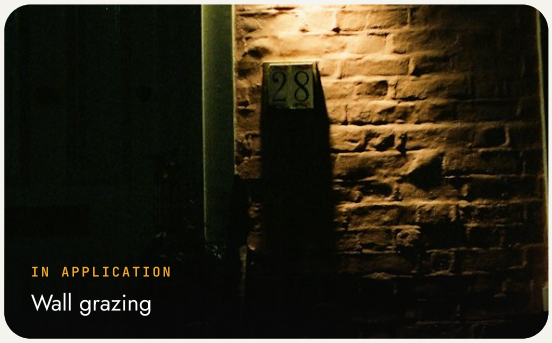

MAKE	ALOXE
MODEL	AA7224
SERIES	Linear Wall Washer
LED MAKE	CREE (24 × 3W)
LUMINOUS FLUX	100 lm/W
INPUT	AC 85-265V 50-60Hz
FINISH	Gray
DIMENSIONS	L1000 x W60 x H72mm
MOUNTING	Bracket mounted

Linear Wall Washer



AA-724

AA-724

Wall Washer

70W aluminium and stalinite (tempered glass) linear wall washer in white and colour variants. Wide-range mains input with optics from 10° to 90°.


POWER	BEAM
70W	10°-90°
PROTECTION	**CRI**
IP65	>80

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · R/G/B · RGBW

APPLICATIONS

Building facades and large wall surfaces

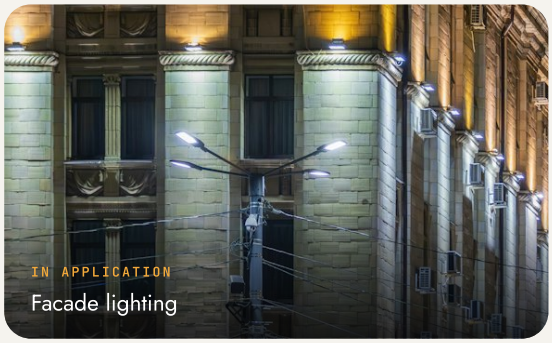

MAKE	ALOXE
MODEL	AA-724
SERIES	Linear Wall Washer
LUMINOUS FLUX	100 lm/W
INPUT	AC 85-265V 50-60Hz
FINISH	Gray
DIMENSIONS	L1000 x W66 x H71mm
MOUNTING	Bracket mounted

Inground Linear



Wall Washers

Inground Linear Recessed Light

Stainless steel inground linear recessed luminaire available in 1000mm and 500mm lengths.

APPLICATIONS

Facade uplighting and landscape



MAKE	ALOXE
SERIES	Inground Linear
FINISH	Stainless Steel
DIMENSIONS	1000 × 90 × 75H; 500 × 90 × 75H
MOUNTING	Inground recessed

Linear Wall Washer



BB-4102

BB-4102

Wall Washer Lamp

High-power aluminium and stalinite linear wall washer with a choice of CREE, Edison or OSRAM chips. PF ≥0.95, IP65, with a 1-year warranty.


POWER	BEAM
50W / 60W / 70W	10°–60°
PROTECTION	**CRI**
IP65	≥80

COLOUR TEMPERATURE

Warm · White · Red · Green · Blue · RGB · RGBW

APPLICATIONS

Building facades and large wall surfaces

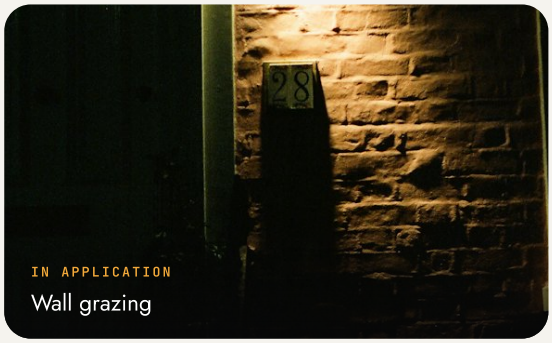

MAKE	ALOXE
MODEL	BB-4102
SERIES	Linear Wall Washer
LED MAKE	CREE, Edison, OSRAM
LUMINOUS FLUX	100 lm/W
INPUT	AC85-265V 50-60Hz
FINISH	Gray
DIMENSIONS	L1000 x W66 x H71mm
MOUNTING	Bracket mounted



N° 05

Up & Down

Wall-mounted up-lighters and up & down cylinders, window and tree luminaires.

TREE & WINDOW · UP & DOWN · UP LIGHTER

12 LUMINAIRES · PAGES 156-167

Tree & Window



TH-12UP

TH-12UP

Tree Holding Lamp

Curved anodized aluminium tree up-lighter whose segments join into a ring around the trunk to uplight the canopy. Available in white and RGB colours, IP65 rated.

POWER	BEAM
12W	24°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · R · G · B


APPLICATIONS

Trees, palms and landscape features



MAKE	ALOXE
MODEL	TH-12UP
SERIES	Tree & Window
LED MAKE	3030 LED
INPUT	24V
FINISH	Black
DIMENSIONS	L220 x W53mm
MOUNTING	Tree-mounted (segmented ring around trunk)

Up & Down

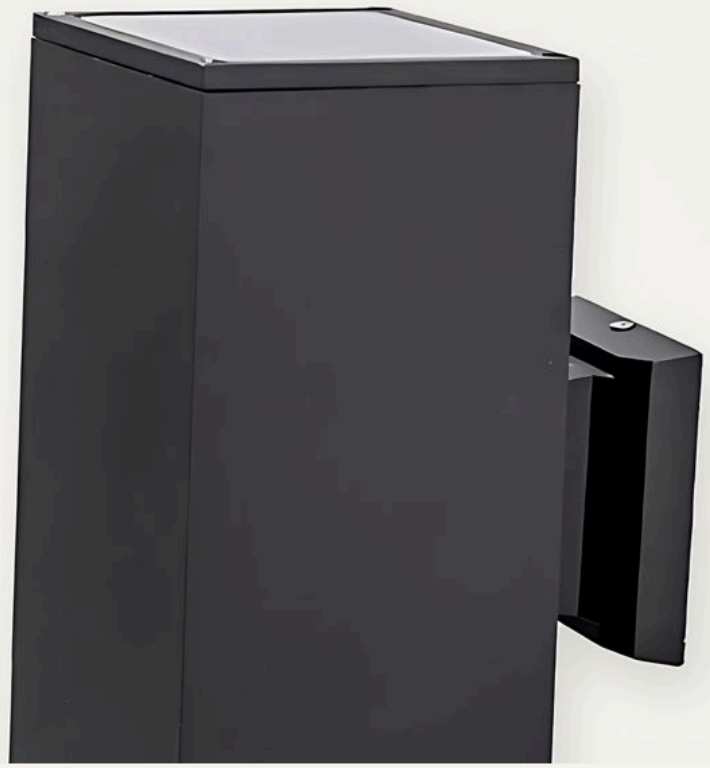

UD10-2

UD10-2


Up & Down Lights

Square aluminium up-and-down wall light with dual 24° beams, available as 15W+15W or 20W+20W. IP65 rated for exterior walls.

POWER	BEAM
30W / 40W	24°
PROTECTION	
IP65	

APPLICATIONS

Exterior walls, entrances, facades

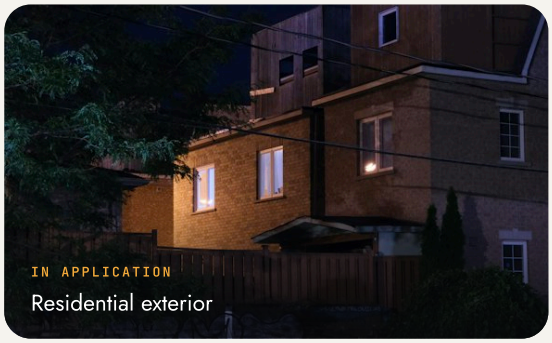

MAKE	ALOXE
MODEL	UD10-2
SERIES	Up & Down
INPUT	240VAC
FINISH	Dark Gray
DIMENSIONS	90 × 90 × 260mm
MOUNTING	Wall mounted

Up & Down



UD1015

UD1015


Square Up Down Light

Slim square aluminium up-and-down wall light with 20° beams, available as 5W+5W or 10W+10W. IP65 rated.

POWER	BEAM
10W / 20W	20°
PROTECTION	
IP65	

APPLICATIONS

Exterior walls, entrances, facades

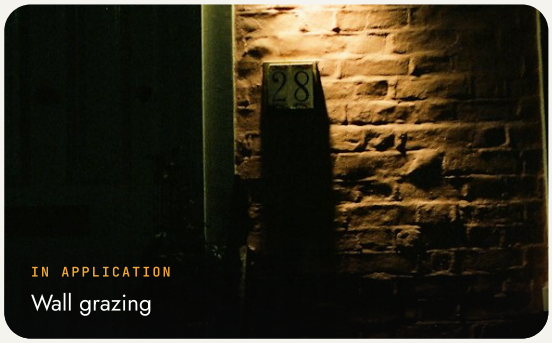

MAKE	ALOXE
MODEL	UD1015
SERIES	Up & Down
INPUT	230VAC
FINISH	Dark Gray
DIMENSIONS	65 × 65 × 260H mm; base 60 × 85 x 48D mm
MOUNTING	Wall mounted

Up & Down



UD51015

UD51015

Up & Down Light

Cylindrical aluminium up-and-down wall light with faceted reflectors, offered in four dual-wattage sizes from 5W+5W to 20W+20W. IP65 rated.

POWER	BEAM
10W–40W	24°
PROTECTION	
IP65	

APPLICATIONS

Exterior walls, entrances, facades



MAKE	ALOXE
MODEL	UD51015
SERIES	Up & Down
INPUT	230VAC
FINISH	Dark Gray
DIMENSIONS	5W+5W: D64 x H150; 10W+10W: D64 x H200; 15W+15W: D108 x H280; 20W+20W: D100 x H330 (mm)
MOUNTING	Wall mounted

Up Lighter



UP51015

UP51015


Up Lighter

Cylindrical aluminium single-direction wall up-lighter with a faceted reflector, available from 5W to 20W. IP65 rated.

POWER	BEAM
5W–20W	24°
PROTECTION	
IP65	


APPLICATIONS

Exterior walls, columns, facades

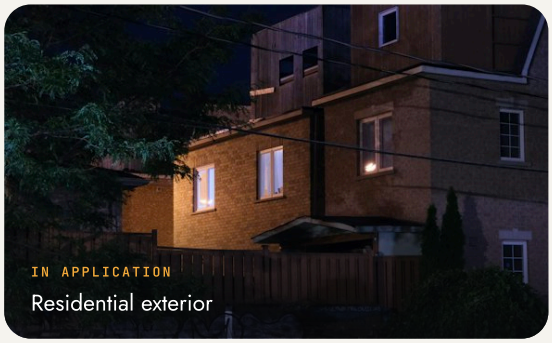

MAKE	ALOXE
MODEL	UP51015
SERIES	Up Lighter
INPUT	240VAC
FINISH	Dark Gray
DIMENSIONS	5W: 120H x 63D, base 40×35Dx75H; 10W: 135H x 63D, base 40×35Dx75H; 15W: 145H x 108D, base 75×40Dx110H; 20W: 145H x 108D, base 75×40Dx110H (mm)
MOUNTING	Wall mounted

Tree & Window

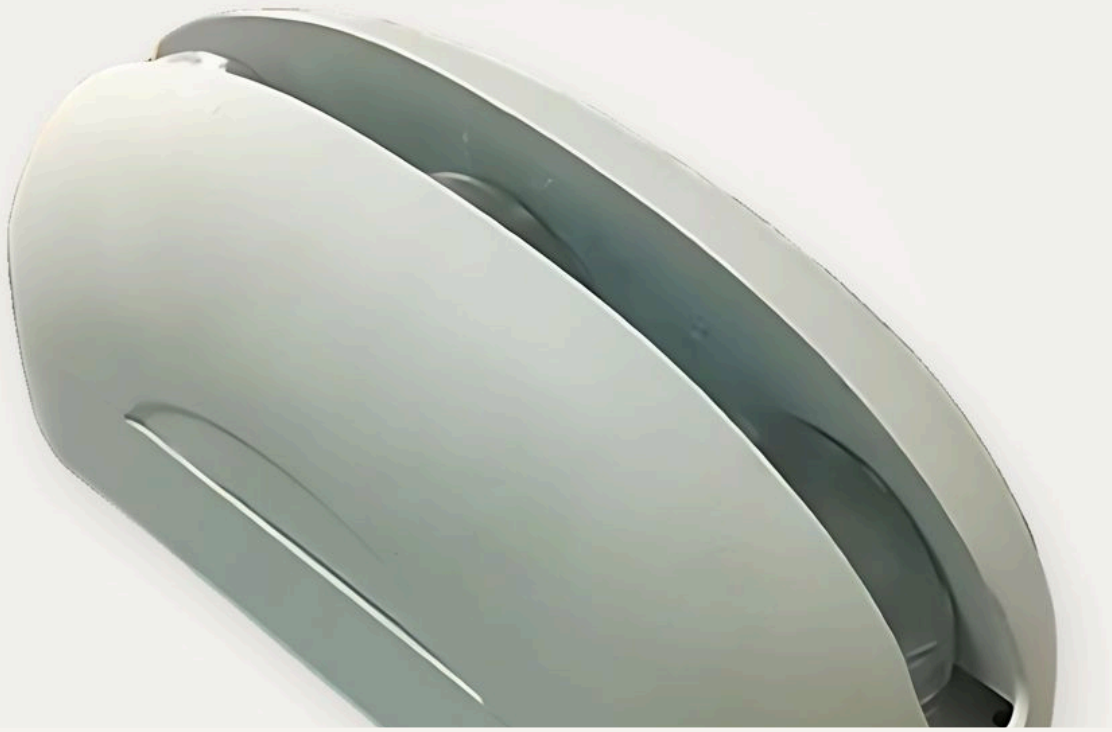

Up & Down

Window Light

Compact aluminium window-sill luminaire that grazes window reveals to outline building facades. Available in 9W and 18W, single colour or RGB.


POWER	PROTECTION
9W / 18W	IP65

COLOUR TEMPERATURE

Single Colour · RGB

APPLICATIONS

Building facades, window outlines, heritage architecture

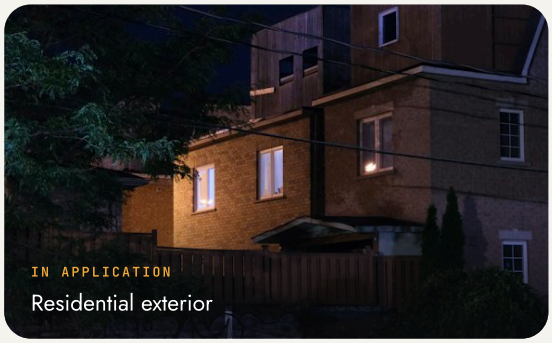

MAKE	ALOXE
SERIES	Tree & Window
FINISH	White
DIMENSIONS	9W: L120 x W53 x H66mm; 18W: L183 x W70 x H76mm
MOUNTING	Window sill / facade mounted

Up Lighter



UPQ01

UPQ01

Square Up Lighter

Square aluminium wall up-lighter with a 20° beam, available in 5W and 10W. IP65 rated.

POWER	BEAM
5W / 10W	20°
PROTECTION	
IP65	

APPLICATIONS

Exterior walls, entrances, facades



MAKE	ALOXE
MODEL	UPQ01
SERIES	Up Lighter
INPUT	230VAC
FINISH	Dark Gray
DIMENSIONS	65 × 65 × 120H mm; base 60 × 85H x 50D mm
MOUNTING	Wall mounted

Up Lighter



UPQ015

UPQ015


Square Up Lighter

Larger square aluminium wall up-lighter with a 20° beam, available in 15W and 20W. IP65 rated.

POWER	BEAM
15W / 20W	20°
PROTECTION	
IP65	

APPLICATIONS

Exterior walls, entrances, facades

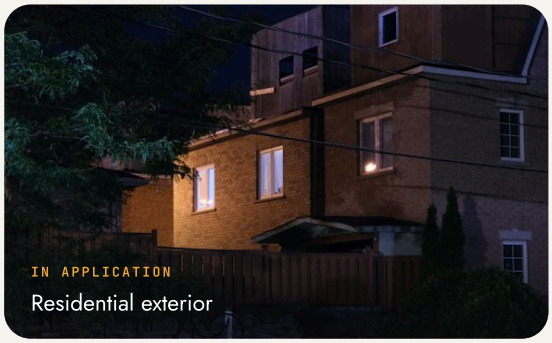

IN APPLICATION
Residential exterior

MAKE	ALOXE
MODEL	UPQ015
SERIES	Up Lighter
INPUT	230VAC
FINISH	Dark Gray
DIMENSIONS	90 × 90 × 155H mm; base 75 × 105H x 58D mm
MOUNTING	Wall mounted

Up Lighter



UP524

UP524


Up Lighter

Compact half-dome aluminium up-lighter with multi-LED CREE optics in a choice of beam angles. IP65 rated.

POWER	BEAM
5W	10°–60°
PROTECTION	
IP65	

APPLICATIONS

Exterior walls, columns, facades

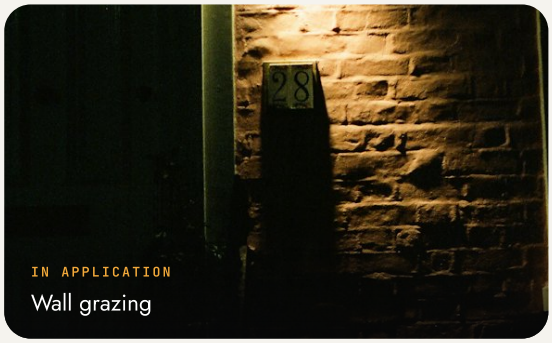

MAKE	ALOXE
MODEL	UP524
SERIES	Up Lighter
LED MAKE	CREE
INPUT	230VAC
FINISH	Silver Gray / Dark Gray
MOUNTING	Wall mounted

Up Lighter



324UP12

12W Uplighter

Cube-shaped aluminium wall up-lighter with a deep faceted reflector and finned heat-sink back, producing a focused upward beam. IP65 rated.

POWER	PROTECTION
12W	IP65

APPLICATIONS

Exterior walls, facades, entrances



MAKE	ALOXE
MODEL	324UP12
SERIES	Up Lighter
LED MAKE	COB
INPUT	230VAC
FINISH	Dark Gray
DIMENSIONS	90 × 90 × 90mm
MOUNTING	Wall mounted

Up Lighter



AXUP2034

AXUP2034

Up Lighter

Cylindrical aluminium wall up-lighter with a faceted reflector and choice of three beam angles. IP65 rated.


POWER	BEAM
15W	20°–60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Exterior walls, columns, facades

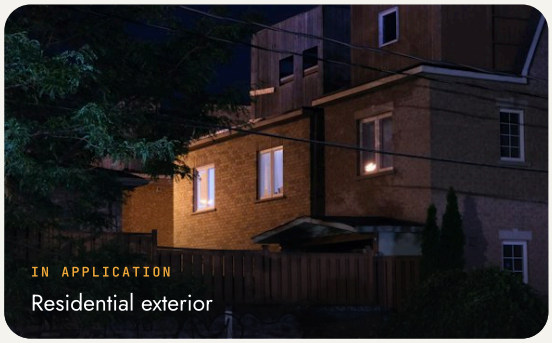

IN APPLICATION
Residential exterior

MAKE	ALOXE
MODEL	AXUP2034
SERIES	Up Lighter
LED MAKE	COB
INPUT	220VAC
FINISH	Black
DIMENSIONS	D80 x H120mm
MOUNTING	Wall mounted

Up & Down



AXUP1974

AXUP1974

Up & Down Light

Large cylindrical aluminium up-and-down wall light with dual 30W CREE sources (30W+30W) for tall facades. IP65 rated with three beam options.


POWER	BEAM
60W	24°–60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K 4000K 6000K

APPLICATIONS

Tall facades, building entrances, columns

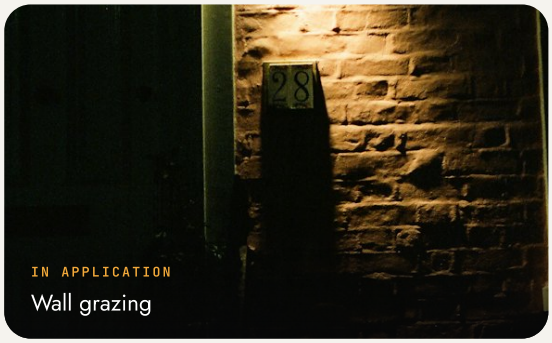

IN APPLICATION
Wall grazing

MAKE	ALOXE
MODEL	AXUP1974
SERIES	Up & Down
LED MAKE	CREE
INPUT	220VAC
FINISH	Gray
DIMENSIONS	D150 x H400mm; depth 195mm
MOUNTING	Wall mounted



N° 06

Underwater

Pool, fountain and submersible luminaires in stainless steel, rated for permanent immersion.

POOL · FOUNTAIN

15 LUMINAIRES · PAGES 169–183

Pool



Underwater

AquaPro Elite Series Underwater LED Fixture

Marine-grade aluminium underwater fixture with a mirror-polish finish and focused 30° beam. High power factor and low ripple, dimmable via compatible drivers, with an optional high-efficiency driver.


POWER	BEAM
6W / 12W / 18W	30°
PROTECTION	
IP68	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · RGB

APPLICATIONS

Pools, water features

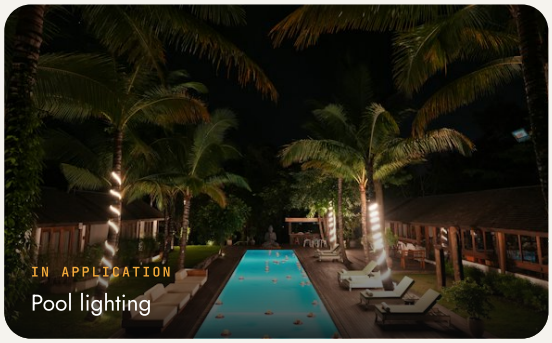

MAKE	ALOXE
SERIES	Pool
LUMINOUS FLUX	600-1800lm (approx)
INPUT	12V / 24V DC
FINISH	Mirror Polish
DIMENSIONS	Ø110 × 20 mm (+ gland)
MOUNTING	Surface mounted; integrated waterproof gland and cable
CONTROL	Dimmable

Pool



Underwater


3W Chrome Underwater Light

Compact, fully waterproof underwater light with a high-grade aluminium body in chrome finish. Three power LEDs in white or RGB options.

POWER	PROTECTION
3W	IP68

COLOUR TEMPERATURE

3000K · 4000K · 6000K · RGB

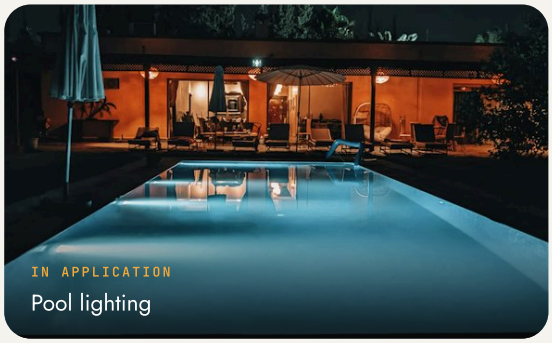

MAKE	ALOXE
SERIES	Pool
LED MAKE	3 × 1W power LEDs
INPUT	12V
FINISH	Chrome
DIMENSIONS	Ø73 × 22 mm
MOUNTING	Surface mounted

Pool



Underwater

12W Surface-Mount Underwater Light

Fully waterproof surface-mount underwater light with a polished aluminium body and power LED array. Available in warm to cool white and RGB.

POWER	PROTECTION
12W	IP68

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · RGB


APPLICATIONS

Swimming pools



MAKE	ALOXE
SERIES	Pool
LED MAKE	Power LED array
INPUT	24V (12W driver optional)
FINISH	Polished Aluminium
DIMENSIONS	Ø125 × 25 mm (+ gland)
MOUNTING	Surface mounted

Pool

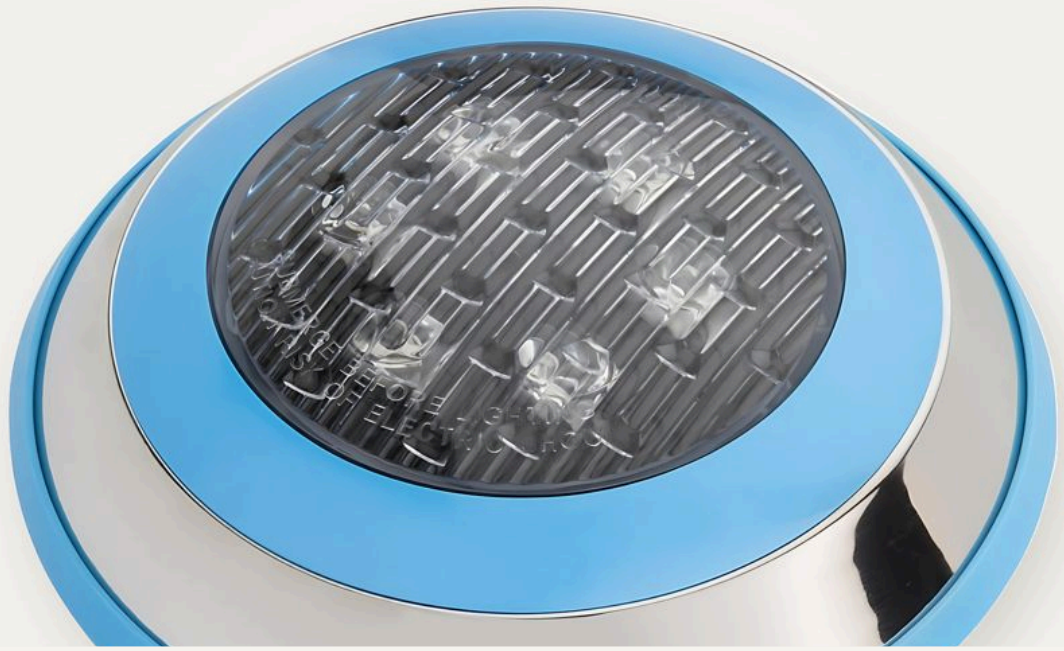

EX6S

EX6S


Under Water Light

Surface-mounted underwater light with a 304 stainless steel body. IP68 rated for permanent submersion.

POWER	PROTECTION
6W	IP68

APPLICATIONS

Swimming pools

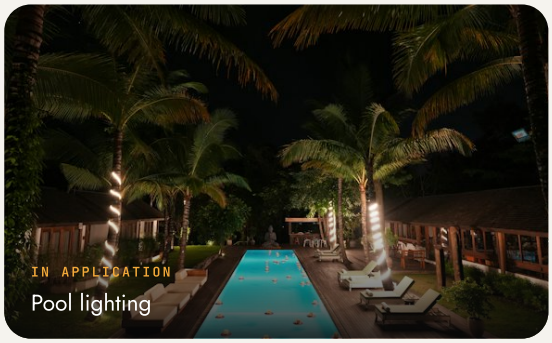

MAKE	ALOXE
MODEL	EX6S
SERIES	Pool
INPUT	24V or driver
FINISH	Stainless Steel
DIMENSIONS	Ø180 × 45 mm
MOUNTING	Surface mounted

Pool



AXP31624

AXP31624

Slim Pool Light

Ultra-slim 7.5 mm resin-filled pool light with a marine-grade 316 stainless steel ring, 100% waterproof. Multicolour with remote control and animation modes.


POWER	PROTECTION
6W–35W	IP68

COLOUR TEMPERATURE

RGB (multicolour)

APPLICATIONS

Swimming pools

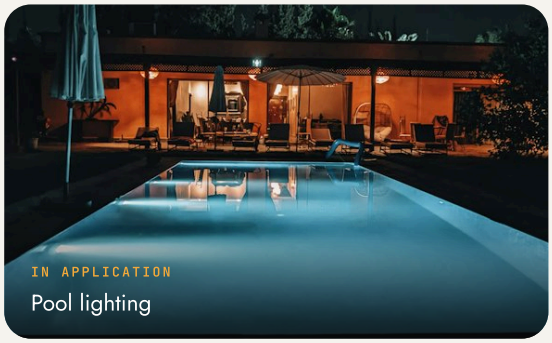

MAKE	ALOXE
MODEL	AXP31624
SERIES	Pool
INPUT	12V
FINISH	Stainless Steel
DIMENSIONS	6W: Ø110 mm; 12W: Ø160 mm; 25W/35W: Ø230 mm; 7.5 mm thick
MOUNTING	Wall mounted (screw fixed)

Pool



CR6CL

CR6CL

Under Water Fitting

Recessed aluminium underwater fitting with six 1W LEDs and a 30° beam. Available in white and RGB colours.

POWER	BEAM
6W (6 x 1W)	30°
PROTECTION	
IP68	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · Red · Green · Blue



IN APPLICATION

Fountain lighting

MAKE	ALOXE
MODEL	CR6CL
SERIES	Pool
LED MAKE	6 × 1W
INPUT	12V / 24V
FINISH	Chrome
DIMENSIONS	Ø128 mm
CUT-OUT	110 mm
MOUNTING	Recessed

Fountain



Underwater

Fountain Ring Light

Fountain ring light with a 304 stainless steel top cover and aluminium body, fitting around a 38 mm nozzle. Choice of lens angles and white, RGB or RGBW colours.

POWER	BEAM
6W	15°–60°
PROTECTION	
IP68	

COLOUR TEMPERATURE

2200-6000K · Red · Green · Blue · RGB 3-in-1 · RGBW 4-in-1


APPLICATIONS

Fountains



MAKE	ALOXE
SERIES	Fountain
LED MAKE	Prolux / CREE
INPUT	24V DC
FINISH	Grey / Stainless Steel
DIMENSIONS	Ø130 × 85 mm; middle hole Ø38 mm
MOUNTING	Nozzle mounted (fountain)

Pool

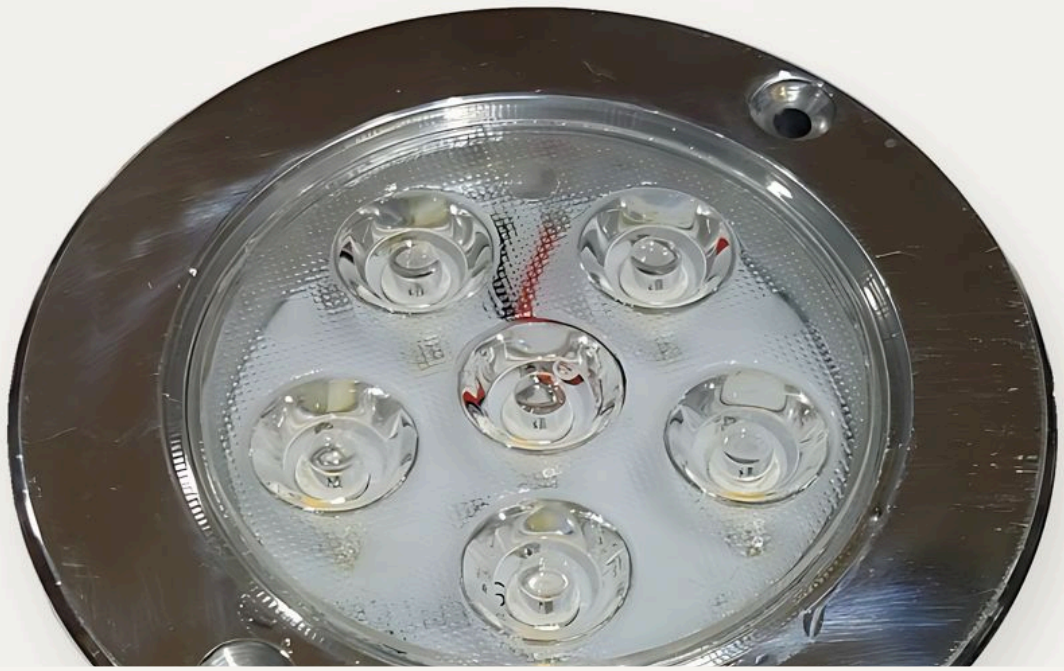


Underwater

6W Under Water Light

Compact 6W IP68 underwater light with a polished chrome ring and six-LED optic.

POWER	PROTECTION
6W	IP68

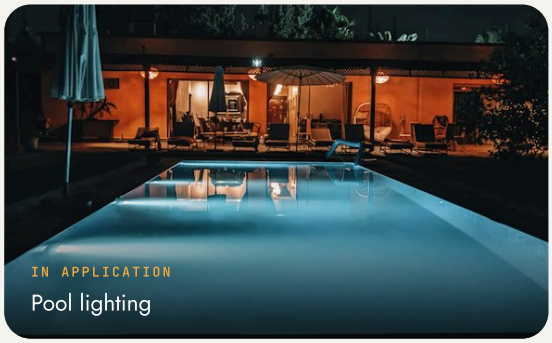

MAKE	ALOXE
SERIES	Pool
FINISH	Chrome
DIMENSIONS	Ø110 × 20 mm (+ gland)
MOUNTING	Surface mounted

Fountain



AXFT0022

AXFT0022

Fountain LED Light

Fountain ring light in aluminium with a stainless steel top, fitting around a 50 mm nozzle. Available in white, RGB and RGBW with 10°-90° beam options.

POWER	BEAM
12W / 18W	10°-90°
PROTECTION	
IP68	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · RGB · RGBW

APPLICATIONS

Fountains



IN APPLICATION
Fountain lighting

MAKE	ALOXE
MODEL	AXFT0022
SERIES	Fountain
INPUT	12V / 24V / CC
FINISH	Stainless Steel
DIMENSIONS	Ø180 × 85 mm; hole Ø50 mm
MOUNTING	Nozzle mounted (fountain)

06

Fountain



AXFT0011

AXFT0011

Fountain Light

Fountain ring light in 304 stainless steel, fitting around a 40 mm nozzle. Available in white, RGB and RGBW with 10°-90° beam options.


POWER	BEAM
12W / 18W	10°-90°
PROTECTION	
IP68	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · RGB · RGBW

APPLICATIONS

Fountains

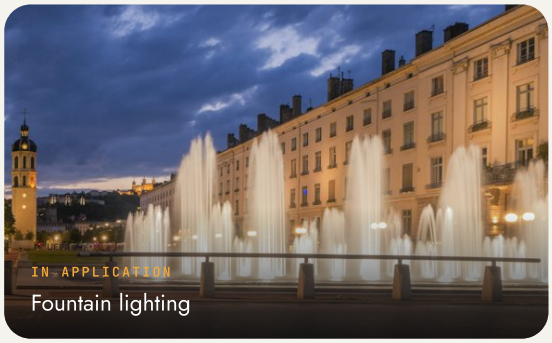

MAKE	ALOXE
MODEL	AXFT0011
SERIES	Fountain
INPUT	12V / 24V / CC
FINISH	Stainless Steel
DIMENSIONS	Ø180 × 76 mm; hole Ø40 mm
MOUNTING	Nozzle mounted (fountain)

Pool



Underwater

ABS Underwater Pool Light

Large 290 mm IP68 pool light with a white ABS housing. Available in white and RGB colour options.


POWER	PROTECTION
12W / 18W	IP68

COLOUR TEMPERATURE

- Red
- Green
- Blue
- Warm White
- White
- Neutral White

APPLICATIONS

Swimming pools

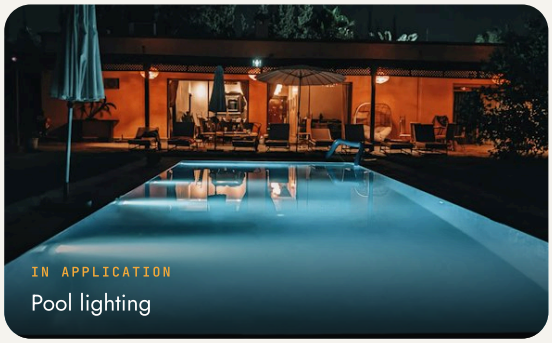

MAKE	ALOXE
SERIES	Pool
INPUT	12V / 24V / CC
FINISH	White
DIMENSIONS	Ø290 mm
MOUNTING	Wall mounted

Pool



CR-38

CR-38

Under Water (Conceal)

Concealed recessed underwater light in aluminium with Edison LEDs and a 30° beam. Available in tunable white and RGB.

POWER	BEAM
18W	30°
PROTECTION	
IP68	

COLOUR TEMPERATURE

2700K-6500K · Red · Green · Blue



MAKE	ALOXE
MODEL	CR-38
SERIES	Pool
LED MAKE	Edison
INPUT	350mA
FINISH	Chrome
DIMENSIONS	Ø185 × 25 mm
CUT-OUT	150 mm
MOUNTING	Recessed (concealed)

Pool



BB-2028

BB-2028

Swimming Pool Lamp

Wall-mounted swimming pool lamp in SS304 with an acrylic lens, Edison power LEDs and PF ≥0.95. Includes a 1-year warranty.


POWER	BEAM
18W	10°–60°
PROTECTION	**CRI**
IP68	≥80

COLOUR TEMPERATURE

Warm · White · Red · Green · Blue · RGB · RGBW

APPLICATIONS

Swimming pools

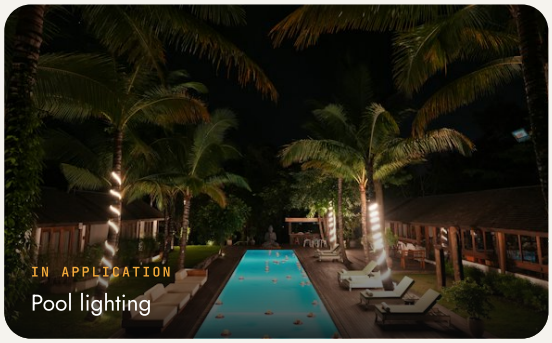

MAKE	ALOXE
MODEL	BB-2028
SERIES	Pool
LED MAKE	Edison power LED
LUMINOUS FLUX	100lm/W
INPUT	DC 12V / DC 24V / CC
FINISH	Stainless Steel
DIMENSIONS	Ø290 mm
MOUNTING	Wall mounted

Pool



BB-2028

BB-2028

Swimming Pool Lamp

Wall-mounted swimming pool lamp in SS304 with an acrylic lens, Edison power LEDs and PF ≥0.95. Includes a 1-year warranty.


POWER	BEAM
12W	10°–60°
PROTECTION	**CRI**
IP68	≥80

COLOUR TEMPERATURE

Warm · White · Red · Green · Blue · RGB · RGBW

APPLICATIONS

Swimming pools

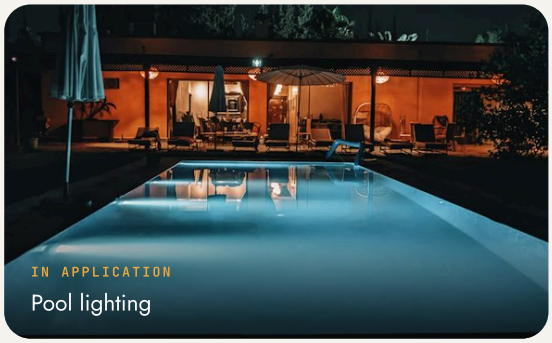

IN APPLICATION
Pool lighting

MAKE	ALOXE
MODEL	BB-2028
SERIES	Pool
LED MAKE	Edison power LED
LUMINOUS FLUX	100lm/W
INPUT	DC 12V / DC 24V / CC
FINISH	Stainless Steel
DIMENSIONS	Ø230 × 60 mm
MOUNTING	Wall mounted

Pool



BB-2028

BB-2028

Swimming Pool Lamp

Wall-mounted swimming pool lamp in SS304 with an acrylic lens, Edison power LEDs and PF ≥0.95. Includes a 1-year warranty.

POWER	BEAM
12W / 18W	10°–60°
PROTECTION	**CRI**
IP68	≥80

COLOUR TEMPERATURE

Warm · White · Red · Green · Blue · RGB · RGBW

APPLICATIONS

Swimming pools



MAKE	ALOXE
MODEL	BB-2028
SERIES	Pool
LED MAKE	Edison power LED
LUMINOUS FLUX	100lm/W
INPUT	DC 12V / DC 24V / CC
FINISH	Stainless Steel
DIMENSIONS	Ø230 × 60 mm
MOUNTING	Wall mounted



N° 07

Inground & Foot

Drive-over inground uplights, movable and multi-way burials, mini markers and foot lights.

INGROUND · MOVABLE INGROUND · MINI INGROUND · FOOT LIGHT

35 LUMINAIRES · PAGES 185-219

Inground



2424IG

2424IG

LED Inground

Heavy-duty LED inground light with 304 stainless steel trim, aluminium body and toughened glass. Available in multiple beam angles and white or RGB light colours.

POWER	BEAM
24W	5°–60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2000K · 2700K · 3000K · 4000K · 6000K · RGB

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
MODEL	2424IG
SERIES	Inground
INPUT	230VAC / 12V DC / 24V DC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø200 × 100H mm
MOUNTING	Recessed (inground)

07

Inground



2436IG

2436IG

LED Inground

High-output LED inground light with 304 stainless steel trim, aluminium body and toughened glass. Available in multiple beam angles and white or RGB light colours.


POWER	BEAM
36W	5°–60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2000K · 2700K · 3000K · 4000K · 6000K · RGB

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

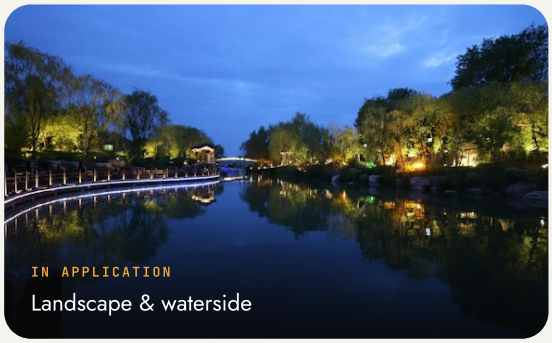

MAKE	ALOXE
MODEL	2436IG
SERIES	Inground
INPUT	230VAC / 12V DC / 24V DC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø250 × 100H mm
MOUNTING	Recessed (inground)

07

Inground



ING1002

ING1002

Elite Inground Light

Compact 3W Cree inground light with a stainless steel bezel, aluminium body and tempered glass lens. Low-voltage DC operation with an external driver.


POWER	BEAM
3W	18° / 38°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

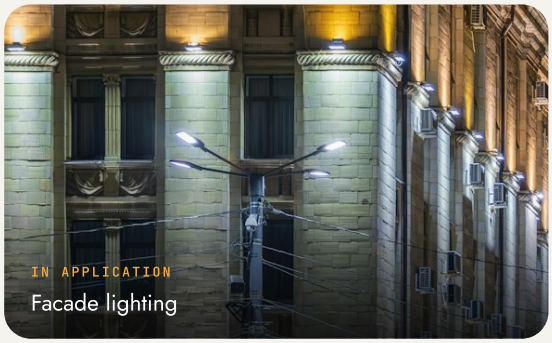

IN APPLICATION

Facade lighting

MAKE	ALOXE
MODEL	ING1002
SERIES	Inground
LED MAKE	Cree
INPUT	12V DC / 24V DC (external driver)
FINISH	Brushed Stainless Steel / Matte Black
DIMENSIONS	Ø45 × 50H mm
CUT-OUT	Ø40 mm
MOUNTING	Recessed (inground)

07

Movable Inground



ING6M

ING6M

Movable Inground

Adjustable-head inground light in 304 stainless steel and aluminium, allowing the beam to be aimed after installation. Available in tunable white and RGB options.

POWER	BEAM
6W	10°-60°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K-6500K RGB

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



IN APPLICATION

Step lighting

MAKE	ALOXE
MODEL	ING6M
SERIES	Movable Inground
LED MAKE	Cree
INPUT	230VAC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø130 × 135H mm
CUT-OUT	Ø115 mm
MOUNTING	Recessed (inground)

07

Movable Inground



1201

1201

Movable Inground Light

Multi-LED movable inground light in stainless steel and aluminium with an aimable optic. Wide colour temperature range from 2200K to 6500K.

BEAM	PROTECTION
10°-60°	IP65

COLOUR TEMPERATURE

2200K-6500K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



IN APPLICATION
Pathway lighting

MAKE	ALOXE
MODEL	1201
SERIES	Movable Inground
LED MAKE	3535
INPUT	230VAC / 24V DC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø160 × 150H mm
CUT-OUT	Ø140 mm
MOUNTING	Recessed (inground)

07

Inground



ING10IN

ING10IN


COB Inground

12W Cree COB inground light with a 304 stainless steel ring and aluminium body. Interchangeable reflectors offer 15°, 38° or 60° beams.

POWER	BEAM
12W	15°–60°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

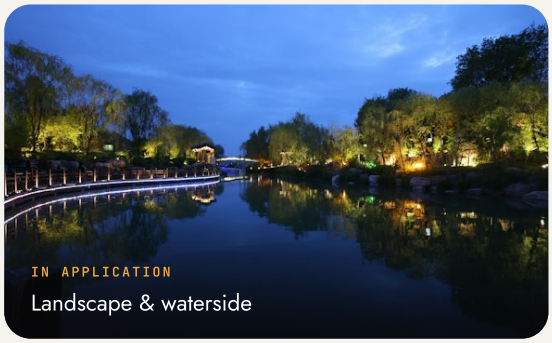

IN APPLICATION
Landscape & waterside

MAKE	ALOXE
MODEL	ING10IN
SERIES	Inground
LED MAKE	Cree COB
INPUT	230VAC
FINISH	Stainless Steel
DIMENSIONS	85 × 65 × 80H mm
MOUNTING	Recessed (inground)

07

Inground



ING3CH

ING3CH


Inground Light

5W COB inground light in stainless steel and aluminium, available in all light colours.

POWER	BEAM
5W	45°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

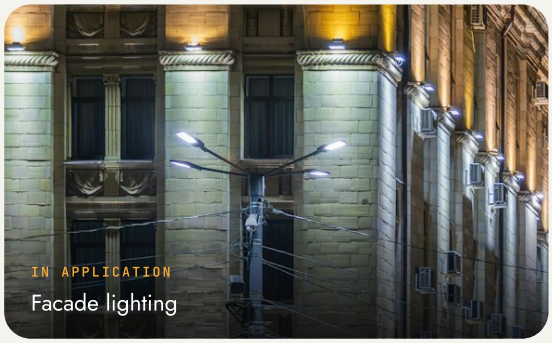

MAKE	ALOXE
MODEL	ING3CH
SERIES	Inground
INPUT	240VAC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø100 × 75H mm
CUT-OUT	Ø95 mm
MOUNTING	Recessed (inground)

07

Inground



ING6CH

ING6CH

Inground Light

12W COB inground light in stainless steel and aluminium, available in all light colours.

POWER	BEAM
12W	45°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
MODEL	ING6CH
SERIES	Inground
INPUT	240VAC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø120 × 80H mm
CUT-OUT	Ø115 mm
MOUNTING	Recessed (inground)

07

Inground



ING-Ax124I

ING-Ax124I

1-2-4-Way Inground

Directional aluminium inground marker available in 1-way, 2-way and 4-way light distributions. High-CRI Cree LEDs for path and step accent lighting.

POWER	PROTECTION
3W / 4W / 6W	IP65
CRI	
80	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



IN APPLICATION
Pathway lighting

MAKE	ALOXE
MODEL	ING-Ax124I
SERIES	Inground
LED MAKE	Cree
INPUT	DC
FINISH	Grey
DIMENSIONS	Ø85 mm top, Ø75 × 75H mm body
MOUNTING	Recessed (inground)

07

Inground



ING-12IN

ING-12IN


Inground

Low-profile 12W multi-LED inground light in 304 stainless steel and aluminium, supplied with a waterproof driver.

POWER	BEAM
12W	30°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

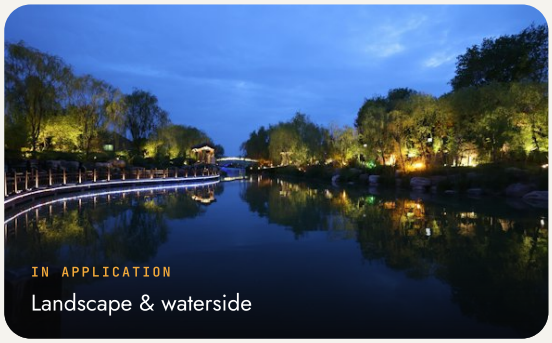

IN APPLICATION
Landscape & waterside

MAKE	ALOXE
MODEL	ING-12IN
SERIES	Inground
INPUT	36V (waterproof driver)
FINISH	Stainless Steel
DIMENSIONS	Ø135 × 58H mm
CUT-OUT	Ø128 mm
MOUNTING	Recessed (inground)

07

Inground



ING31w

ING31w


Inground Fitting

Three-LED inground fitting with a 304 stainless steel ring and aluminium body.

PROTECTION
IP65

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

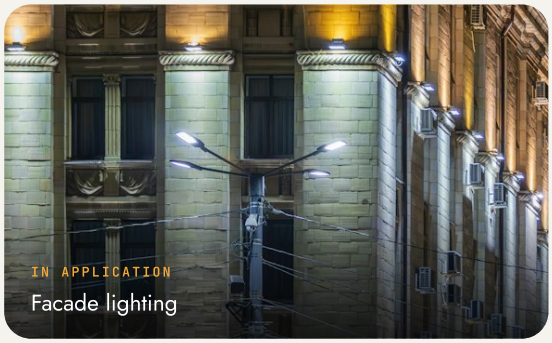

MAKE	ALOXE
MODEL	ING31w
SERIES	Inground
FINISH	Stainless Steel / Black
DIMENSIONS	Ø85 × 50H mm (with gland)
CUT-OUT	Ø75 mm
MOUNTING	Recessed (inground)

07

Inground



ING31w

ING31w

Inground Fitting

3 × 1W LED inground fitting with a 304 stainless steel ring and aluminium body, operated by a 3W driver.

POWER	PROTECTION
3 x 1W	IP65

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



IN APPLICATION
Step lighting

MAKE	ALOXE
MODEL	ING31w
SERIES	Inground
INPUT	3W driver
FINISH	Stainless Steel / Black
DIMENSIONS	Ø85 × 50H mm (with gland)
CUT-OUT	Ø75 mm
MOUNTING	Recessed (inground)

07

Mini Inground



AXIGHC001

AXIGHC001

1 Way Inground

Miniature 1W one-way inground marker with a 304 stainless steel hooded cap for glare-free directional light.

POWER	PROTECTION
1W	IP65

COLOUR TEMPERATURE

3000K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
MODEL	AXIGHC001
SERIES	Mini Inground
INPUT	3V
FINISH	Stainless Steel / Black
DIMENSIONS	Ø32 × 60H mm
CUT-OUT	Ø29 mm
MOUNTING	Recessed (inground)

07

Foot Light



AXF001

AXF001

Foot Light

Compact 1W die-cast aluminium foot light with a hooded face for low-level step and wall lighting.


POWER	PROTECTION
1W	IP65

COLOUR TEMPERATURE

3000K

APPLICATIONS

Staircases, corridors, steps and low-level wall marking

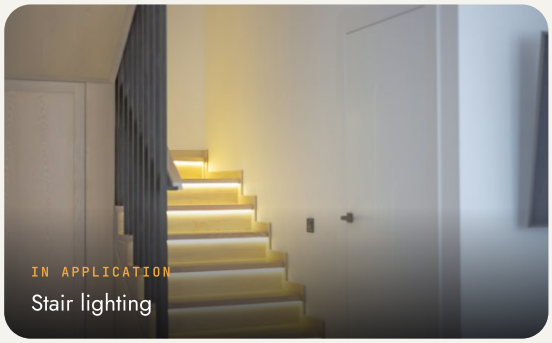

IN APPLICATION

Stair lighting

MAKE	ALOXE
MODEL	AXFOO1
SERIES	Foot Light
INPUT	3V
FINISH	White
DIMENSIONS	Ø25 × 32 mm depth
CUT-OUT	Ø18 mm
MOUNTING	Recessed (wall/step)

07

Foot Light



AXFS001

AXFS001

Foot Light

3W aluminium foot light with spring clips, offered with half-moon, slot or round face options.

POWER	PROTECTION
3W	IP65

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K

APPLICATIONS

Staircases, corridors, steps and low-level wall marking



MAKE	ALOXE
MODEL	AXFS001
SERIES	Foot Light
INPUT	3V
FINISH	Silver
DIMENSIONS	Ø35 × 55L mm
CUT-OUT	Ø26 mm
MOUNTING	Recessed (wall/step)

07

Mini Inground



AXIG01

AXIG01

Inground

Miniature 1W aluminium inground light that runs directly on mains voltage.

POWER	PROTECTION
1W	IP65

COLOUR TEMPERATURE

3000K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



IN APPLICATION

Step lighting

MAKE	ALOXE
MODEL	AXIG01
SERIES	Mini Inground
INPUT	230VAC
FINISH	Silver / Black
DIMENSIONS	Ø28 × 65L mm
CUT-OUT	Ø25 mm
MOUNTING	Recessed (inground)

07

Foot Light



AX3SUR

AX3SUR

1-Way Surface Light

Low-profile 3W one-way surface marker in cast aluminium, projecting a directional wash across the ground.

POWER	BEAM
3W	5°-90°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



IN APPLICATION
Step lighting

MAKE	ALOXE
MODEL	AX3SUR
SERIES	Foot Light
LED MAKE	3535
INPUT	230VAC
FINISH	Black
DIMENSIONS	Ø120 × 35H mm
MOUNTING	Surface mounted

07

Inground



ING-29

ING-29


12W Inground

12W Cree multi-LED inground light with a 304 stainless steel ring, aluminium body and built-in driver. Available in beam angles from 10° to 90°.

POWER	BEAM
12W	10°-90°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

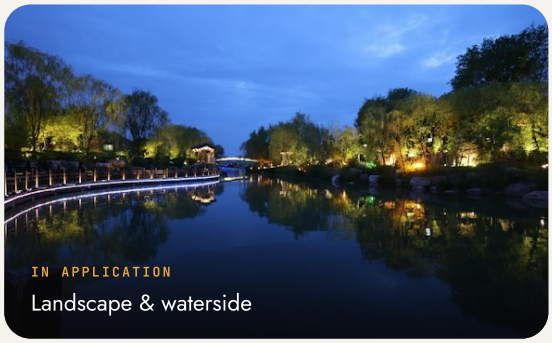

MAKE	ALOXE
MODEL	ING-29
SERIES	Inground
LED MAKE	Cree
INPUT	230VAC (built-in driver)
FINISH	Stainless Steel / Black
DIMENSIONS	Ø160 × 90H mm
CUT-OUT	Ø140 mm
MOUNTING	Recessed (inground)

Movable Inground



Inground & Foot


12W Movable Inground

12W Cree movable inground light with an inbuilt Fulham driver and an aimable LED module.

POWER
12W

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

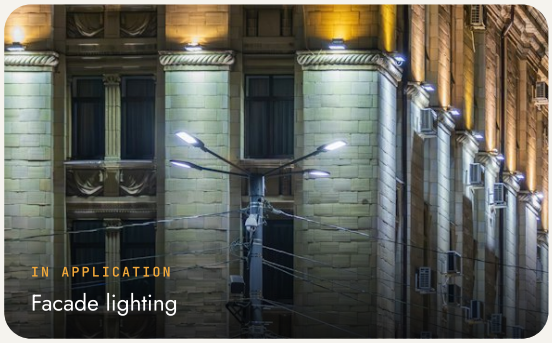

MAKE	ALOXE
SERIES	Movable Inground
LED MAKE	Cree
INPUT	Inbuilt Fulham driver
FINISH	Stainless Steel / Black
DIMENSIONS	Ø160 × 150H mm
CUT-OUT	Ø140 mm
MOUNTING	Recessed (inground)

Inground



ING115

ING115

Asymmetrical Inground

Asymmetric-optic Cree COB inground light in 304 stainless steel and aluminium, ideal for grazing walls and facades.

PROTECTION
IP65

COLOUR TEMPERATURE

2200K | 2700K | 3000K | 4000K | 6000K | RGB

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
MODEL	ING115
SERIES	Inground
LED MAKE	Cree COB
INPUT	External waterproof driver
FINISH	Stainless Steel / Black
DIMENSIONS	Ø115 × 60H mm
CUT-OUT	Ø100 mm
MOUNTING	Recessed (inground)

Inground



ING10C

ING10C

Concealed Inground

Concealed COB inground light in SS304 and aluminium with a deep anti-glare Darcoo reflector and spring-clip mounting.

POWER	BEAM
10W / 12W	15°–45°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K · RGB

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
MODEL	ING10C
SERIES	Inground
LED MAKE	Cree
INPUT	DC
FINISH	Stainless Steel
DIMENSIONS	Ø85 × 60H mm
CUT-OUT	Ø65 mm
MOUNTING	Recessed (inground)

07

Inground



ING1CH

ING1CH


Inground Light

Compact 3W inground light in stainless steel and aluminium, available in all light colours.

POWER	BEAM
3W	5°–45°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

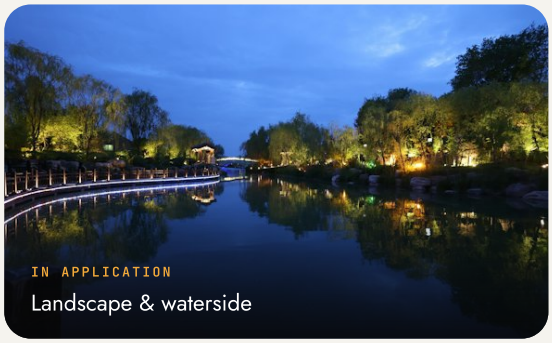

MAKE	ALOXE
MODEL	ING1CH
SERIES	Inground
INPUT	240VAC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø65 × 70H mm
CUT-OUT	Ø60 mm
MOUNTING	Recessed (inground)

07

Inground



ING6CH

ING6CH


Inground Light

6W multi-LED inground light in stainless steel and aluminium, available in all light colours.

POWER	BEAM
6W	5°–45°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

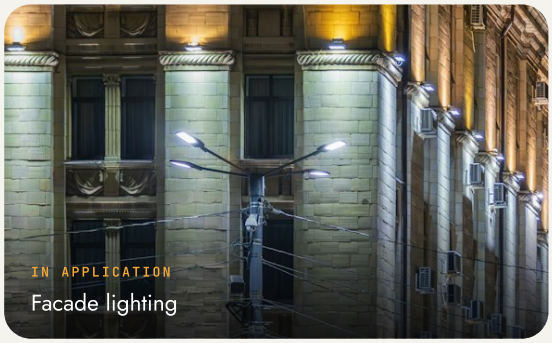

MAKE	ALOXE
MODEL	ING6CH
SERIES	Inground
INPUT	240VAC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø120 × 80H mm
CUT-OUT	Ø115 mm
MOUNTING	Recessed (inground)

07

Inground



AXING-1102

AXING-1102

Inground Lights

5W COB inground light with a 304 stainless steel trim, operating directly on mains voltage.

POWER	BEAM
5W	30°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting




IN APPLICATION
Step lighting

MAKE	ALOXE
MODEL	AXING-1102
SERIES	Inground
INPUT	220VAC
FINISH	Stainless Steel / Black
DIMENSIONS	Ø62 × 90H mm
CUT-OUT	Ø54 mm
MOUNTING	Recessed (inground)

07

Mini Inground

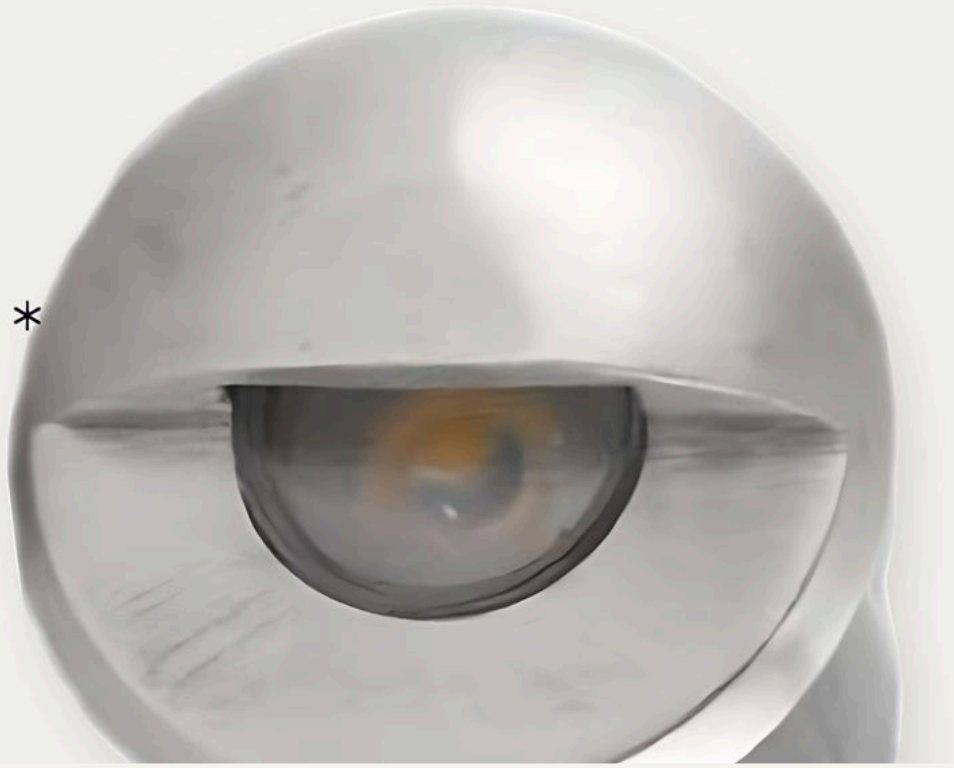

AXING-023

AXING-023

Inground

Hooded eyelid inground marker in 304 stainless steel and aluminium for glare-controlled directional light.

POWER	BEAM
1W / 3W	5°-90°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · RGB

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
MODEL	AXING-023
SERIES	Mini Inground
INPUT	3V
FINISH	Stainless Steel
DIMENSIONS	Ø45 × 45H mm
CUT-OUT	Ø40 mm
MOUNTING	Recessed (inground)

07

Mini Inground



ING101

ING101

Inground

Compact stainless steel and aluminium inground light, available in IP65 or submersible IP68 versions.


POWER	BEAM
1W / 3W	5°-90°
PROTECTION	
IP65 / IP68	

COLOUR TEMPERATURE

3000K · 4000K · 6000K · RGB

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

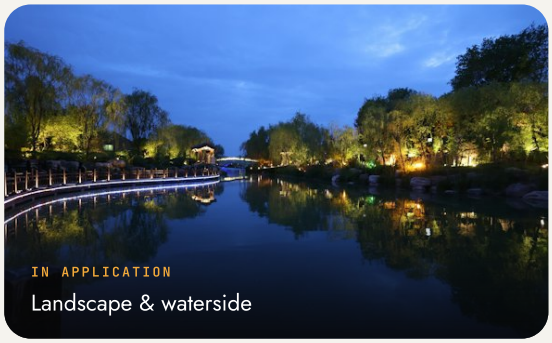

MAKE	ALOXE
MODEL	ING101
SERIES	Mini Inground
INPUT	Constant current
FINISH	Stainless Steel / Black
DIMENSIONS	Ø45 × 45H mm
CUT-OUT	Ø40 mm
MOUNTING	Recessed (inground)

07

Mini Inground



AXIG0922

AXIG0922

Mini Inground

Miniature 1W inground light machined from 304 stainless steel with double O-ring sealing to IP67.


POWER	BEAM
1W	30°
PROTECTION	
IP67	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

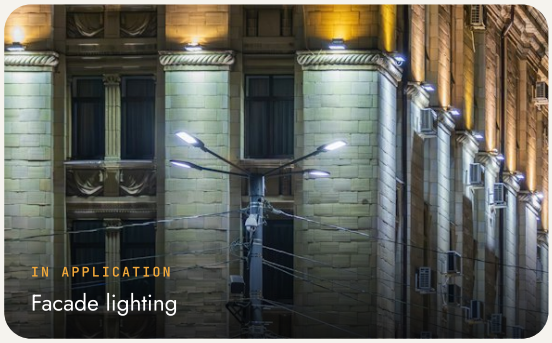

MAKE	ALOXE
MODEL	AXIG0922
SERIES	Mini Inground
INPUT	24V DC
FINISH	Stainless Steel
DIMENSIONS	Ø32 × 50H mm
CUT-OUT	Ø25 mm
MOUNTING	Recessed (inground)

07

Mini Inground



AXIG7022

AXIG7022

Mini Inground

Tiny 0.5W 304 stainless steel marker light with a wide 120° beam, sealed to IP67.

POWER	BEAM
0.5W	120°
PROTECTION	
IP67	

COLOUR TEMPERATURE

3000K

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



IN APPLICATION
Step lighting

MAKE	ALOXE
MODEL	AXIG7022
SERIES	Mini Inground
INPUT	12V DC
FINISH	Stainless Steel
DIMENSIONS	Ø25 × 36H mm
CUT-OUT	Ø17 mm
MOUNTING	Recessed (inground)

07

Mini Inground



AXIG9022

AXIG9022

Mini Inground

Ultra-compact 0.2W 304 stainless steel marker light with a wide 120° beam, sealed to IP67.

POWER	BEAM
0.2W	120°
PROTECTION	
IP67	

COLOUR TEMPERATURE

3000K

APPLICATIONS


Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
MODEL	AXIG9022
SERIES	Mini Inground
INPUT	12V DC
FINISH	Stainless Steel
DIMENSIONS	Ø15 × 26H mm
CUT-OUT	Ø13 mm
MOUNTING	Recessed (inground)

07

Inground

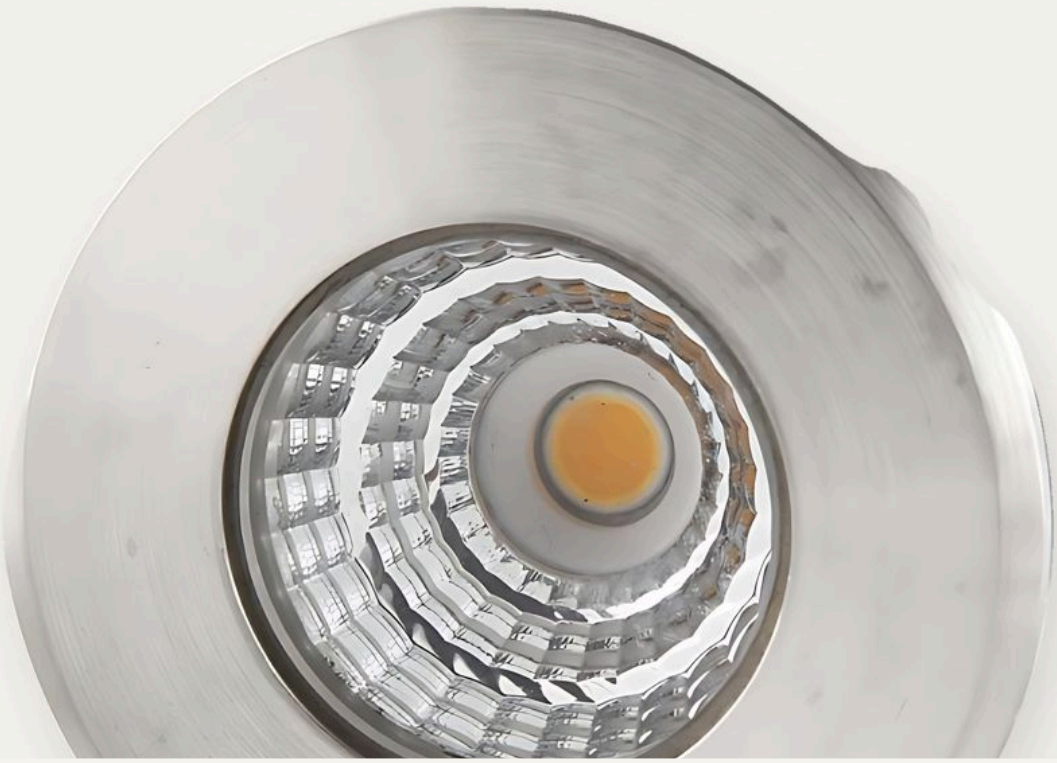

Inground & Foot


Mono Inground

Compact 5W COB inground light in 304 stainless steel and aluminium.

POWER	PROTECTION
5W	IP65

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

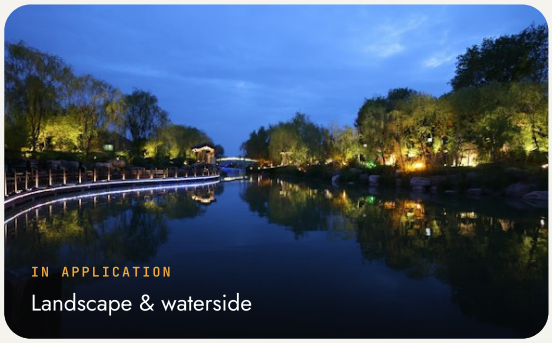

MAKE	ALOXE
SERIES	Inground
LED MAKE	COB
FINISH	Stainless Steel
DIMENSIONS	Ø60 × 40H mm
CUT-OUT	Ø45 mm
MOUNTING	Recessed (inground)

07

Inground



1100

1100

Underground Lamp

3W Epistar COB underground lamp with stainless steel trim, power factor ≥0.5 and a 1-year warranty.


POWER	BEAM
3W	30°
PROTECTION	**CRI**
IP65	≥80

COLOUR TEMPERATURE

Warm White · White · Red · Green · Blue

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

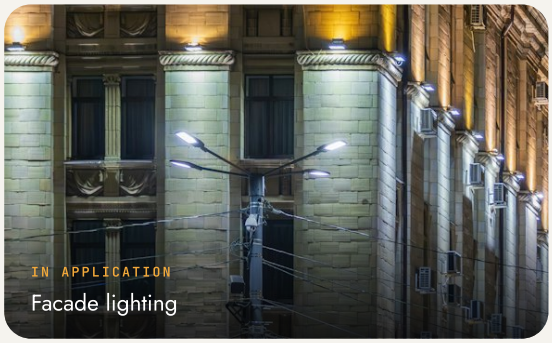

MAKE	ALOXE
MODEL	1100
SERIES	Inground
LED MAKE	Epistar COB
LUMINOUS FLUX	70 lm/W
INPUT	AC85-265V, 50-60Hz
FINISH	Stainless Steel / Black
DIMENSIONS	Ø43 × 72H mm
CUT-OUT	Ø38 mm
MOUNTING	Recessed (inground)

07



Inground & Foot

2-Way Inground

5W two-way inground marker in cast aluminium with Cree LEDs, casting light in two opposite directions.

POWER	PROTECTION
5W	IP65

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
SERIES	Inground
LED MAKE	Cree
FINISH	Grey
DIMENSIONS	Ø85 × 75H mm
CUT-OUT	Ø75 mm
MOUNTING	Recessed (inground)

Inground



Inground & Foot

10W COB Inground

10W COB inground light in 304 stainless steel and aluminium with a choice of 14°, 40° or 60° reflectors.

POWER	BEAM
10W	14°–60°
PROTECTION	
IP65	

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
SERIES	Inground
LED MAKE	COB
FINISH	Stainless Steel
DIMENSIONS	Ø85 × 75H mm
CUT-OUT	Ø75 mm
MOUNTING	Recessed (inground)

07

Inground



1102

1102

Underground Lamp

5W Epistar COB underground lamp with stainless steel trim, power factor ≥0.5 and a 1-year warranty.


POWER	BEAM
5W	60°
PROTECTION	**CRI**
IP65	≥80

COLOUR TEMPERATURE

Warm White · White · Red · Green · Blue

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting

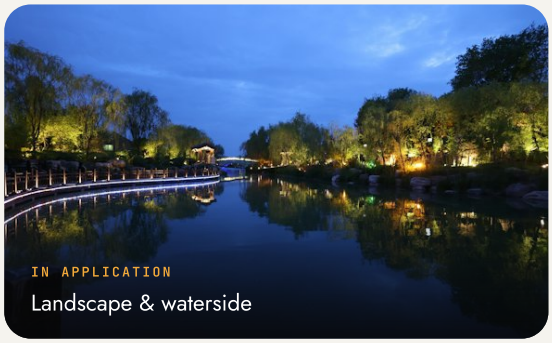

IN APPLICATION

Landscape & waterside

MAKE	ALOXE
MODEL	1102
SERIES	Inground
LED MAKE	Epistar COB
LUMINOUS FLUX	70 lm/W
INPUT	AC85-265V, 50-60Hz
FINISH	Stainless Steel / Black
DIMENSIONS	Ø62 × 90H mm
CUT-OUT	Ø54 mm
MOUNTING	Recessed (inground)

07

Foot Light



Inground & Foot

3W Surface Light

Low-profile 3W IP65 surface-mounted marker light that projects a directional wash across the ground.

POWER	PROTECTION
3W	IP65

APPLICATIONS

Garden paths, driveways, facades, landscape and architectural uplighting



MAKE	ALOXE
SERIES	Foot Light
FINISH	Black
MOUNTING	Surface mounted



N° 08


Step, Wall & Surface

Surface cylinders and low-level step lights for paths, porches and stairways.

STEP & WALL · SURFACE CYLINDER

4 LUMINAIRES · PAGES 221–224

Step & Wall

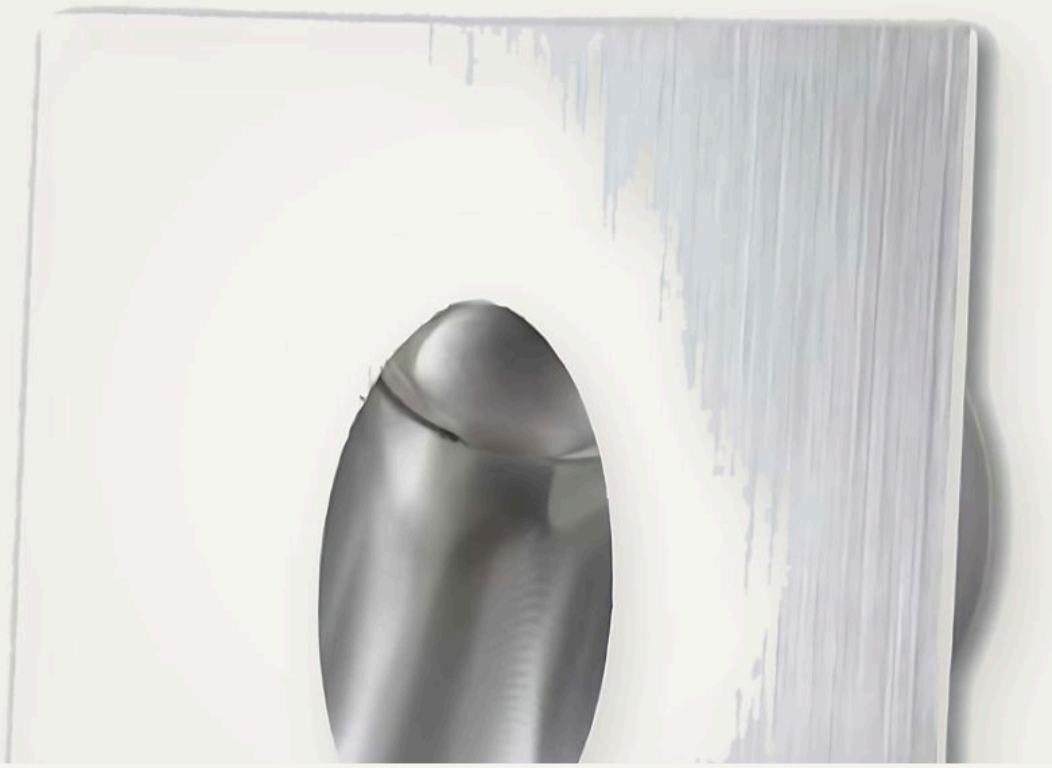

AL3ST

Step Light

Square recessed step light in brushed aluminium with an oval eyelid aperture for glare-free downward guidance lighting. Runs on a 3W driver.

POWER
3W

APPLICATIONS

Staircases, corridors



MAKE	ALOXE
MODEL	AL3ST
SERIES	Step & Wall
INPUT	3W driver
FINISH	Brushed Aluminium
DIMENSIONS	78 × 78 × 25 mm (D)
MOUNTING	Wall recessed

Surface Cylinder



OS1024

OS1024

Surface Fitting IP65

Slim cylindrical outdoor surface downlight in dark grey aluminium with a 24° reflector beam. IP65 rated for exterior use.

POWER	BEAM
5W / 10W	24°
PROTECTION	
IP65	



MAKE	ALOXE
MODEL	OS1024
SERIES	Surface Cylinder
INPUT	230V AC
FINISH	Dark Grey
DIMENSIONS	10W: Ø64 × 160 mm; 5W: Ø64 × 120 mm
MOUNTING	Surface mounted

Surface Cylinder



ODSUR23

ODSUR23

Outdoor Surface

Cylindrical outdoor surface downlight in aluminium with a 30° beam, offered in three sizes. IP65 rated for exterior use.

POWER	BEAM
10W / 15W / 25W	30°
PROTECTION	
IP65	

COLOUR TEMPERATURE

2700K · 3000K · 4000K · 6000K



MAKE	ALOXE
MODEL	ODSUR23
SERIES	Surface Cylinder
INPUT	220V AC
FINISH	Grey
DIMENSIONS	Ø90 × 130 mm; Ø108 × 130 mm; Ø145 x 160 mm
MOUNTING	Surface mounted

Surface Cylinder



AX-SUR230

AX-SUR230

Outdoor Light

High-output cylindrical outdoor surface light in aluminium with a deep reflector and a choice of 15°, 24° or 45° beams. IP65 rated.

POWER	BEAM
20W / 30W / 40W	15°–45°
PROTECTION	
IP65	

COLOUR TEMPERATURE

3000K 4000K 6000K



MAKE	ALOXE
MODEL	AX-SUR230
SERIES	Surface Cylinder
INPUT	220V AC
FINISH	Black
DIMENSIONS	20W: Ø90 × 130 mm; 30W: Ø110 × 140 mm; 40W: Ø120 × 160 mm
MOUNTING	Surface mounted



N° 09

Power & Control

Waterproof SMPS drivers, dimmers and RGB / RGBW controllers to run every ALOXE system.

DRIVERS · DIMMERS · CONTROLLERS

6 LUMINAIRES · PAGES 226-231

09

Drivers



Power & Control


Waterproof SMPS (IP67)

IP67 waterproof constant-voltage LED power supplies in aluminium housings, available from 15W to 300W with 12V or 24V output.

POWER	PROTECTION
15W–300W	IP67


APPLICATIONS

Outdoor and underwater LED fixtures, LED strips

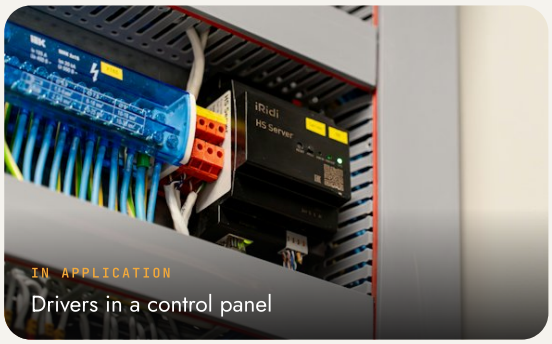

MAKE	ALOXE
SERIES	Drivers
INPUT	Output 12V / 24V DC
FINISH	Silver
DIMENSIONS	15W: 90×30×20 mm; 24W: 105×35×23 mm; 36W: 105×40×30 mm; 60W: 135×35×24 mm; 150W/200W: 195×65×40 mm; 250W/300W: 195×65×30 mm

Drivers

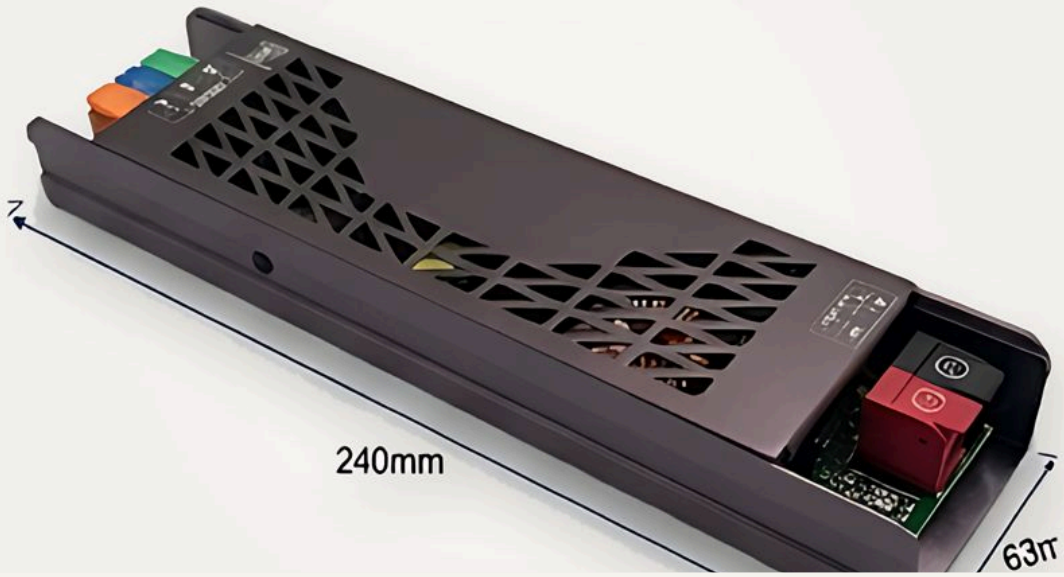

Power & Control


Constant Voltage Slim SMPS

Slim constant-voltage LED power supplies delivering 100% rated power output at 12V or 24V. Backed by a 2-year warranty.

POWER
60W–400W

APPLICATIONS

LED strips and profile lighting

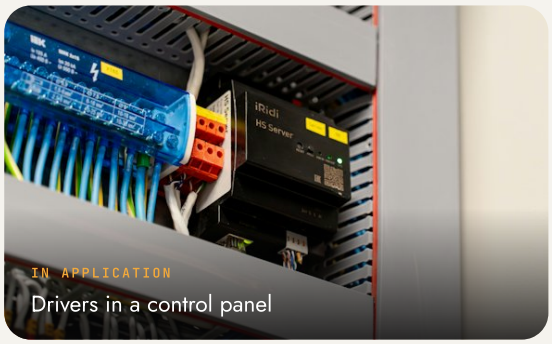

MAKE	ALOXE
SERIES	Drivers
INPUT	Output 12V / 24V DC
FINISH	Brown
DIMENSIONS	60W: 131×52×27 mm; 120W: 154×52×27.25 mm; 200W: 211×52×27.25 mm; 250W: 221×62×28.7 mm; 400W: 240×63×29 mm

Dimmers



Power & Control


Knob Dimmer

Metal-cased rotary knob dimmer offering smooth, flicker-free 0-100% PWM dimming for single-colour LED lamps and strips. Supports constant-voltage and constant-current loads and can be extended with amplifiers.

POWER
360W

APPLICATIONS

Single-colour LED lamps and strips

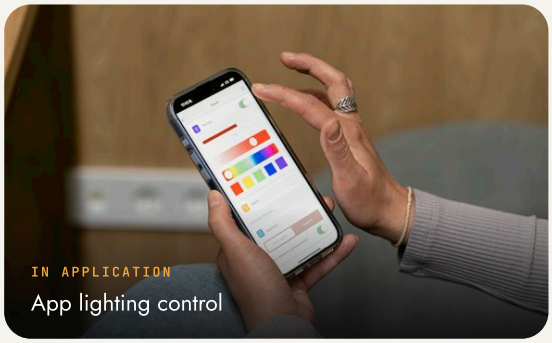

MAKE	ALOXE
SERIES	Dimmers
INPUT	Input 12-24V DC; output 360W, 0-30A
FINISH	Black
CONTROL	Dimmable

Dimmers





Power & Control

DC Dimmer

Single-channel 30A LED dimmer with an 11-key wireless RF remote for stepless 0-100% brightness control. PWM digital dimming avoids rush current to protect LED lights.

POWER
360W

APPLICATIONS

Single-colour LED lighting



MAKE	ALOXE
SERIES	Dimmers
INPUT	DC 12-24V; 1 channel, 0-30A
FINISH	Black
CONTROL	Dimmable

Controllers



Power & Control

LED Controller RGB (Touch Series)

RGB LED controller with a touch-ring wireless remote (approx. 30 m range) controlling up to 16 million colours. Iron and ABS construction, common-anode connection, with static consumption under 1W.


POWER
<216W (12V) / <432W (24V)

COLOUR TEMPERATURE

RGB (16 million colours)

APPLICATIONS

RGB LED strips

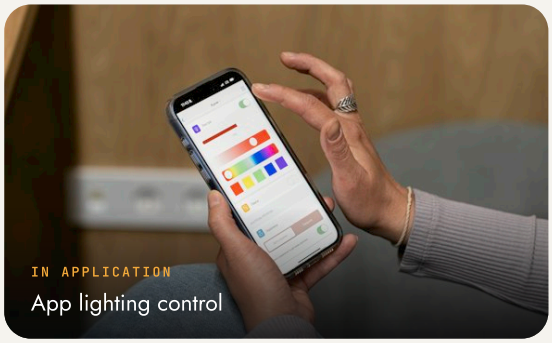

MAKE	ALOXE
SERIES	Controllers
INPUT	DC 5-24V
FINISH	Black
DIMENSIONS	Controller approx. 83 × 81 × 33 mm
CONTROL	Dimmable

09

Controllers



Power & Control

LED RGBW Controller

Four-channel RGBW controller with a 2.4G wireless touch RF remote (30 m range) and 20 built-in programs. Common-anode connection, operating from -20°C to +60°C.

POWER
144W

COLOUR TEMPERATURE

RGBW

APPLICATIONS

RGB / RGBW LED strips



MAKE	ALOXE
SERIES	Controllers
INPUT	DC 12-24V, 8A
FINISH	White
DIMENSIONS	Controller approx. 85 × 45 × 22 mm
CONTROL	Dimmable

09

INDEX

Every model, *at a glance.*

MODEL	PRODUCT	FAMILY	POWER	IP	PAGE
J011LD	Magnetic Linear	Magnetic & Cabinet	3W	IP20	11
J021P	Cabinet Pole Light	Magnetic & Cabinet	3W	IP20	12
JX031P3	Cabinet Pole Light	Magnetic & Cabinet	3W	IP20	13
J002L	Linear Light	Magnetic & Cabinet	18W	IP20	14
JX003L	Linear Light	Magnetic & Cabinet	12W/M	IP20	15
J004T	Magnetic Track Spot	Magnetic & Cabinet	3W	IP20	16
J005T	Magnetic Track Spot	Magnetic & Cabinet	5W	IP20	17
J006ZT	Magnetic Zoomspot	Magnetic & Cabinet	5W	IP20	18
J007FT	Framing Track Spot	Magnetic & Cabinet	5W	IP20	19
J008DT	Spot With Dimmer	Magnetic & Cabinet	5W	IP20	20
J009MT	Magnetic Spot	Magnetic & Cabinet	1W	IP20	21
J010TL	Magnetic Linear Spot	Magnetic & Cabinet	3W	IP20	22
J012L3	Linear Lense Spot	Magnetic & Cabinet	3W	IP20	23
J013L6	Linear Lense Spot	Magnetic & Cabinet	6W	IP20	24
J015T	Magnetic Track	Magnetic & Cabinet		IP20	25
JX014LM	Movable Linear Spot	Magnetic & Cabinet	12W	IP20	26
J016T	Magnetic Track	Magnetic & Cabinet		IP20	27
J017MO	Modules	Magnetic & Cabinet	4W per piece	IP20	28
J018CT	Conceal Track	Magnetic & Cabinet		IP20	29
J019LP	Cabinet Pole Light	Magnetic & Cabinet	5W	IP20	30
J020P4	Cabinet Pole Light	Magnetic & Cabinet	4W	IP20	31
J022P3	Cabinet Pole Light	Magnetic & Cabinet	3W	IP20	32
J023P	Cabinet Pole Light	Magnetic & Cabinet	Single spot / 2.5W (double spot)	IP20	33
J024P3	Cabinet Pole Light	Magnetic & Cabinet	3W	IP20	34
J025P1	Cabinet Pole Light	Magnetic & Cabinet	1W	IP20	35
J026PZ	Cabinet Pole Light	Magnetic & Cabinet	3W	IP20	36
JX027P	Cabinet Pole Light	Magnetic & Cabinet	6W	IP20	37
J028P	Cabinet Pole Light	Magnetic & Cabinet	3W	IP20	38
J029P	Cabinet Pole Light	Magnetic & Cabinet	2W	IP20	39
J030P	Cabinet Pole Light	Magnetic & Cabinet	1W	IP20	40
J032P	Cabinet Pole Light	Magnetic & Cabinet	3×1W	IP20	41
JX033P	Cabinet Pole Light	Magnetic & Cabinet	3W	IP20	42
JX034T	Magnetic Pole	Magnetic & Cabinet		IP20	43
J036H	Magnetic Spot	Magnetic & Cabinet	3.5W	IP20	44

MODEL	PRODUCT	FAMILY	POWER	IP	PAGE
J041TR	Magnetic Track	Magnetic & Cabinet		IP20	49
J040H	Linear Magnetic	Magnetic & Cabinet	6W	IP20	50
J042TR	Magnetic Corner Track	Magnetic & Cabinet		IP20	51
J042T	Magnetic Spot	Magnetic & Cabinet	3W	IP20	52
J044T	Magnetic Spot	Magnetic & Cabinet	1W	IP20	53
J045TZ	Magnetic Spot	Magnetic & Cabinet	3W	IP20	54
J046T	Magnetic Spot	Magnetic & Cabinet	1W	IP20	55
J047TR	Magnetic Track	Magnetic & Cabinet		IP20	56
J048T	Magnetic Spot	Magnetic & Cabinet	3W	IP20	57
J049T	Magnetic Spot	Magnetic & Cabinet	5W	IP20	58
J050T	Magnetic Spot	Magnetic & Cabinet	3W	IP20	59
JX051H	Surface Spot	Magnetic & Cabinet	3W	IP20	60
J052S	Surface Spot	Magnetic & Cabinet	1W	IP20	61
J053S	Surface Spot	Magnetic & Cabinet	1W / 3W	IP20	62
J054C	Conceal Spot	Magnetic & Cabinet	3W	IP20	63
J055C	Conceal Spot	Magnetic & Cabinet	1W	IP20	64
J056C	Conceal Spot	Magnetic & Cabinet	1W	IP20	65
J062C	Conceal Spot	Magnetic & Cabinet	3W	IP20	66
J058C	Conceal Spot	Magnetic & Cabinet	1.5W	IP20	67
J059C	Conceal Spot	Magnetic & Cabinet	1W	IP20	68
J060C	Conceal Spot	Magnetic & Cabinet	2W	IP20	69
J060C	Conceal Spot	Magnetic & Cabinet	1.5W	IP20	70
J057CZ	Conceal Spot	Magnetic & Cabinet	3W	IP20	71
J063C	Conceal Spot	Magnetic & Cabinet	2W	IP20	72
J069TF	Framing Track Spot	Magnetic & Cabinet	10W / 20W / 30W	IP20	73
J067TZ	Zoom Track Spot	Magnetic & Cabinet	10W / 20W / 30W	IP20	74
J066C	Conceal Spot	Magnetic & Cabinet	3W	IP20	75
J065C	Conceal Spot	Magnetic & Cabinet	3W	IP20	76
J068TZ	Zoom Track Spot	Magnetic & Cabinet	10W	IP20	77
J001L	Linear Light	Magnetic & Cabinet	12W	IP20	78
—	Mini Spot Light	Magnetic & Cabinet	1W		79
JX069TBF-30	Framing Track Spot	Track & Framing Spots	30W / 20W / 10W	IP20	81
AXZOTR130	Zoomable COB Track Spotlight	Track & Framing Spots	10W / 20W / 30W		82
TZ-2025L	Track Spot (Beam Adjustable)	Track & Framing Spots	20W		83
TZ-2026L	Track Spot (Beam Adjustable)	Track & Framing Spots	30W		84
TZ-2024	Zoom Track Spot	Track & Framing Spots	30W		85
TZ-2023	Zoom Track Spot	Track & Framing Spots	20W		86
TURBO-72216	Pro Series Heavy-Duty Outdoor LED Wall Washer Flood L...	Outdoor Projectors	216W	IP65	88

MODEL	PRODUCT	FAMILY	POWER	IP	PAGE
SP10L	SP10L Outdoor Spot Light	Outdoor Projectors	6W	IP65	89
—	Round Outdoor Flood Light	Outdoor Projectors	12W–48W	IP65	90
AXOD27SQ	Outdoor Light	Outdoor Projectors	27W	IP65	91
FD 200	FD 200 Linear Wall Washer	Outdoor Projectors	150W / 200W	IP65	92
FD 200	FD 200 Linear Wall Washer	Outdoor Projectors	189W	IP65	93
—	LED Beam Light	Outdoor Projectors	10W / 20W / 30W	IP65	94
AXOD27SQ	Outdoor Light	Outdoor Projectors	27W	IP65	95
—	Square Outdoor Projector	Outdoor Projectors	5W–64W	IP65	96
SQ20	Wall Washer	Outdoor Projectors	12W	IP65	97
—	Round Outdoor Projector	Outdoor Projectors	5W–64W	IP65	98
—	LED Beam Light	Outdoor Projectors	10W / 20W / 30W	IP65	99
—	LED Beam Light 36W	Outdoor Projectors	36W	IP65	100
—	LED Beam Light 20W	Outdoor Projectors	20W	IP65	101
—	Fountain Light	Outdoor Projectors	3W / 9W	IP65 / IP68	102
OD12SS	Stainless Steel Fountain Light	Outdoor Projectors	12W	IP65 (built-in driver) / IP68 (external driver)	103
ODCP20	Outdoor Lights	Outdoor Projectors	20W	IP65	104
ODCP12	Outdoor Lights	Outdoor Projectors	12W	IP65	105
—	Narrow Beam Pillar Highlighter	Outdoor Projectors	10W–36W		106
—	Outdoor Newdeco Lights	Outdoor Projectors	18W–65W	IP65	107
GL12C	Garden Lights	Outdoor Projectors	12W	IP65	108
—	Outdoor Light	Outdoor Projectors	18W	IP65	109
—	20W COB Spike Light	Outdoor Projectors	20W	IP65	110
—	3W COB Spike Light	Outdoor Projectors	3W	IP65	111
—	7W & 12W COB Spike Light	Outdoor Projectors	7W / 12W	IP65	112
—	3W Outdoor Spike	Outdoor Projectors	3W		113
ODCAP	Outdoor COB Projector	Outdoor Projectors	10W / 20W / 30W	IP65	114
ODR10CH	Outdoor Light	Outdoor Projectors	10W	IP65	115
ODR5CH	Outdoor Light	Outdoor Projectors	5W	IP65	116
OD10CH	Outdoor Light	Outdoor Projectors	10W	IP65	117
OD20CH	Outdoor Light	Outdoor Projectors	20W	IP65	118
OD30CH	Outdoor Light	Outdoor Projectors	30W	IP65	119
—	Garden Light	Outdoor Projectors	3W / 5W / 12W	IP65	120
AX-Deco	Outdoor Light	Outdoor Projectors	10W / 20W / 30W	IP65	121
AXOD27SQ	Outdoor Light	Outdoor Projectors	27W	IP65	122
AXOD10i	Outdoor Light	Outdoor Projectors	12W	IP65	123
AXOD71	Outdoor Light	Outdoor Projectors	7W	IP65	124
AXOD3	Outdoor Light	Outdoor Projectors	27W	IP65	125
—	IP65 Outdoor Light	Outdoor Projectors	18W–65W	IP65	126

MODEL	PRODUCT	FAMILY	POWER	IP	PAGE
AXOD-3243	Outdoor Light	Outdoor Projectors	30W	IP65	127
HND-FL-AP-10W	Apollo-1	Outdoor Projectors	10W	IP66	128
AX-SQ48	Square Projector	Outdoor Projectors	48W	IP65	129
BB-3134	Project Lamp	Outdoor Projectors	72W	IP65	130
BB-3132	Project Lamp	Outdoor Projectors	48W	IP65	131
BB-3068	Project Lamp	Outdoor Projectors	10W	IP65	132
—	6W IP65 Outdoor Light	Outdoor Projectors	6W	IP65	133
CW 901	Inground Linear Recessed Wall Washer	Wall Washers	50W–6W	IP66	135
—	Wave Light	Wall Washers	48W		136
WL103	Modern Waterproof Outdoor Wall Lamp LED	Wall Washers		IP65	137
—	Wall Washer	Wall Washers	36W	IP65	138
—	Wall Washer	Wall Washers	12W	IP65	139
WW001	Wall Washer	Wall Washers	30W	IP67	140
—	Wall Washer	Wall Washers	36W		141
—	Wall Washer	Wall Washers	12W	IP65	142
—	Wall Washer	Wall Washers	12W	IP65	143
—	Linear Floor Wall Washer	Wall Washers	18W	IP65	144
—	LED Outdoor Wall Light	Wall Washers			145
—	Wall Washer	Wall Washers	36W	IP65	146
WW2423	Wall Washer	Wall Washers	24W	IP65	147
—	LED Recessed Linear Inground	Wall Washers	24W / 12W	IP65	148
AA618	Wall Washer	Wall Washers	18W	IP65	149
BB-1042	Underground Lamp	Wall Washers	5W / 6W	IP65	150
AA7224	Wall Washer	Wall Washers	72W	IP65	151
AA-724	Wall Washer	Wall Washers	70W	IP65	152
—	Inground Linear Recessed Light	Wall Washers			153
BB-4102	Wall Washer Lamp	Wall Washers	50W / 60W / 70W	IP65	154
TH-12UP	Tree Holding Lamp	Up & Down	12W	IP65	156
UD10-2	Up & Down Lights	Up & Down	30W / 40W	IP65	157
UD1015	Square Up Down Light	Up & Down	10W / 20W	IP65	158
UD51015	Up & Down Light	Up & Down	10W–40W	IP65	159
UP51015	Up Lighter	Up & Down	5W–20W	IP65	160
—	Window Light	Up & Down	9W / 18W	IP65	161
UPQ01	Square Up Lighter	Up & Down	5W / 10W	IP65	162
UPQ015	Square Up Lighter	Up & Down	15W / 20W	IP65	163
UP524	Up Lighter	Up & Down	5W	IP65	164
324UP12	12W Uplighter	Up & Down	12W	IP65	165
AXUP2034	Up Lighter	Up & Down	15W	IP65	166

MODEL	PRODUCT	FAMILY	POWER	IP	PAGE
AXUP1974	Up & Down Light	Up & Down	60W	IP65	167
—	AquaPro Elite Series Underwater LED Fixture	Underwater	6W / 12W / 18W	IP68	169
—	3W Chrome Underwater Light	Underwater	3W	IP68	170
—	12W Surface-Mount Underwater Light	Underwater	12W	IP68	171
EX6S	Under Water Light	Underwater	6W	IP68	172
AXP31624	Slim Pool Light	Underwater	6W–35W	IP68	173
CR6CL	Under Water Fitting	Underwater	6W (6 × 1W)	IP68	174
—	Fountain Ring Light	Underwater	6W	IP68	175
—	6W Under Water Light	Underwater	6W	IP68	176
AXFT0022	Fountain LED Light	Underwater	12W / 18W	IP68	177
AXFT0011	Fountain Light	Underwater	12W / 18W	IP68	178
—	ABS Underwater Pool Light	Underwater	12W / 18W	IP68	179
CR-38	Under Water (Conceal)	Underwater	18W	IP68	180
BB-2028	Swimming Pool Lamp	Underwater	18W	IP68	181
BB-2028	Swimming Pool Lamp	Underwater	12W	IP68	182
BB-2028	Swimming Pool Lamp	Underwater	12W / 18W	IP68	183
2424IG	LED Inground	Inground & Foot	24W	IP65	185
2436IG	LED Inground	Inground & Foot	36W	IP65	186
ING1002	Elite Inground Light	Inground & Foot	3W	IP65	187
ING6M	Movable Inground	Inground & Foot	6W	IP65	188
1201	Movable Inground Light	Inground & Foot		IP65	189
ING10IN	COB Inground	Inground & Foot	12W	IP65	190
ING3CH	Inground Light	Inground & Foot	5W	IP65	191
ING6CH	Inground Light	Inground & Foot	12W	IP65	192
ING-Ax124I	1-2-4-Way Inground	Inground & Foot	3W / 4W / 6W	IP65	193
ING-12IN	Inground	Inground & Foot	12W	IP65	194
ING31w	Inground Fitting	Inground & Foot		IP65	195
ING31w	Inground Fitting	Inground & Foot	3 × 1W	IP65	196
AXIGHC001	1 Way Inground	Inground & Foot	1W	IP65	197
AXFO01	Foot Light	Inground & Foot	1W	IP65	198
AXFS001	Foot Light	Inground & Foot	3W	IP65	199
AXIG01	Inground	Inground & Foot	1W	IP65	200
AX3SUR	1-Way Surface Light	Inground & Foot	3W	IP65	201
ING-29	12W Inground	Inground & Foot	12W	IP65	202
—	12W Movable Inground	Inground & Foot	12W		203
ING115	Asymmetrical Inground	Inground & Foot		IP65	204
ING10C	Concealed Inground	Inground & Foot	10W / 12W	IP65	205
ING1CH	Inground Light	Inground & Foot	3W	IP65	206

MODEL	PRODUCT	FAMILY	POWER	IP	PAGE
ING6CH	Inground Light	Inground & Foot	6W	IP65	207
AXING-1102	Inground Lights	Inground & Foot	5W	IP65	208
AXING-023	Inground	Inground & Foot	1W / 3W	IP65	209
ING101	Inground	Inground & Foot	1W / 3W	IP65 / IP68	210
AXIG0922	Mini Inground	Inground & Foot	1W	IP67	211
AXIG7022	Mini Inground	Inground & Foot	0.5W	IP67	212
AXIG9022	Mini Inground	Inground & Foot	0.2W	IP67	213
—	Mono Inground	Inground & Foot	5W	IP65	214
1100	Underground Lamp	Inground & Foot	3W	IP65	215
—	2-Way Inground	Inground & Foot	5W	IP65	216
—	10W COB Inground	Inground & Foot	10W	IP65	217
1102	Underground Lamp	Inground & Foot	5W	IP65	218
—	3W Surface Light	Inground & Foot	3W	IP65	219
AL3ST	Step Light	Step, Wall & Surface	3W		221
OS1024	Surface Fitting IP65	Step, Wall & Surface	5W / 10W	IP65	222
ODSUR23	Outdoor Surface	Step, Wall & Surface	10W / 15W / 25W	IP65	223
AX-SUR230	Outdoor Light	Step, Wall & Surface	20W / 30W / 40W	IP65	224
—	Waterproof SMPS (IP67)	Power & Control	15W–300W	IP67	226
—	Constant Voltage Slim SMPS	Power & Control	60W–400W		227
—	Knob Dimmer	Power & Control	360W		228
—	DC Dimmer	Power & Control	360W		229
—	LED Controller RGB (Touch Series)	Power & Control	<216W (12V) / <432W (24V)		230
—	LED RGBW Controller	Power & Control	144W		231

ALOXE

Light, shaped *with intent.*

Architectural, landscape and display lighting — 213 luminaires across 9 families.

WEB aloxe-lighting.vercel.app

Specifications as published on ALOXE data sheets; they may change without notice. Custom finishes, colour temperatures and optics on request. Application photographs are illustrative. © 2026 ALOXE.